

ABBIDOT AB-T30

ABBIDOT Dog Training Collar User Manual

Model: AB-T30

Brand: ABBIDOT

1. INTRODUCTION

The ABBIDOT Dog Training Collar is designed to assist in correcting unwanted dog behaviors such as excessive barking, destructive chewing, and other common issues. This system offers multiple training modes and an extended range to facilitate effective communication between you and your dog. It is suitable for dogs weighing between 5 and 120 lbs, with neck sizes ranging from 6 to 27 inches.



Image 1.1: The ABBIDOT Dog Training Collar system, featuring the remote control and the collar receiver.

2. IMPORTANT SAFETY INFORMATION

- This product is intended for dog training purposes only.

- Keep the device away from infants and young children.
- Do not use this collar on aggressive dogs.
- Ensure the collar is properly fitted to prevent skin irritation. Avoid leaving the collar on for more than 12 hours per day.
- The remote control is not waterproof; keep it away from water.

3. PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x Remote Control
- 1 x Collar Receiver (Ink Blue)
- 1 x Adjustable Nylon Strap
- 1 x USB Charging Cable
- 1 x Test Light Tool
- 2 x Sets of Contact Points (short and long)
- 1 x User Manual

4. PRODUCT FEATURES

- **Four Training Modes:** Offers 9 sound tones, 36 vibration levels, and 36 safe static stimulation levels for comprehensive training.
- **Extended Range:** Operates effectively up to 3,300 feet, providing ample space for training.
- **Dual-Channel System:** One remote can control two receiver collars simultaneously, allowing for multi-dog training.
- **IPX7 Waterproof Receiver:** The collar receiver is fully waterproof, suitable for use in various weather conditions and environments.
- **Built-in LED Night Light:** Enhances visibility of your dog in low-light conditions, aiding in location and safety.
- **Security Lock:** Prevents accidental activation of static stimulation, ensuring safe and controlled training.
- **Long Battery Life:** Remote lasts up to 35 days, and the collar receiver up to 25 days on a single charge.

Professional Training

4 Training Modes



Image 4.1: Overview of the four training modes and dual-dog switch capability.

IPX7 Waterproof

Playing Freely with the Water



Image 4.2: The IPX7 waterproof receiver allows dogs to play freely in water.

Longer Range

Training Without Any Bound



Image 4.3: The training collar offers an extended range of up to 3,300 feet.

Anti-lost Light

Built-in LED Light

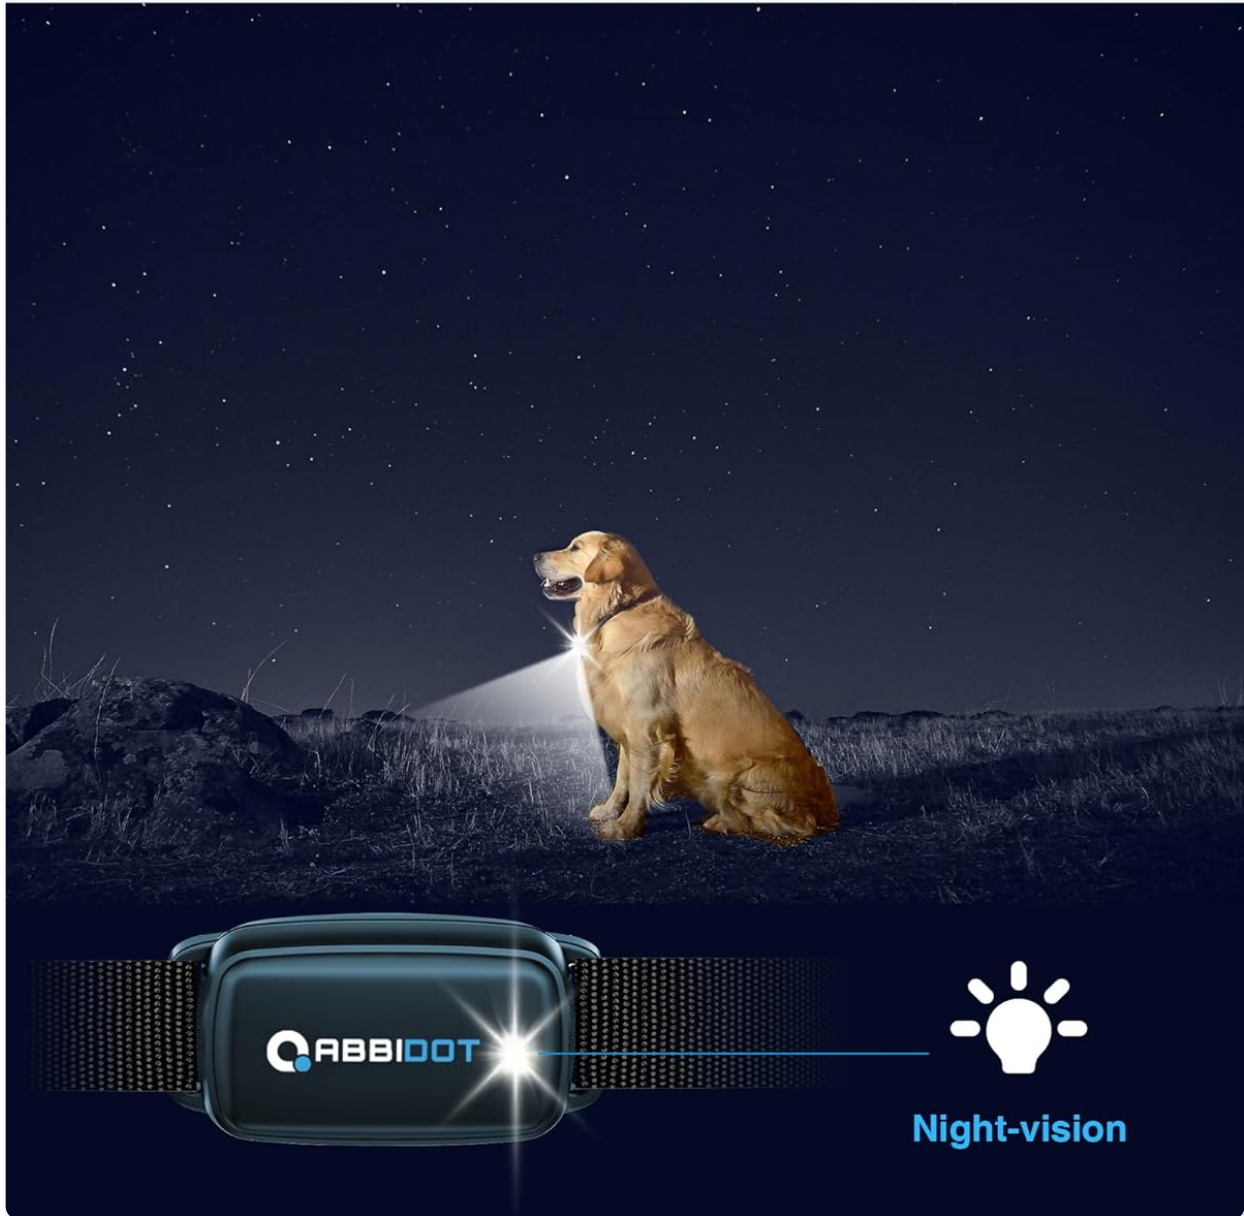


Image 4.4: The built-in LED light on the collar aids in locating your dog at night.

5. SETUP

5.1 Charging the Devices

1. Connect the USB charging cable to the charging port on both the remote control and the collar receiver.
2. Plug the other end of the cable into a standard USB power adapter (not included).
3. The indicator light on both devices will show charging status (refer to device for specific light indications).
4. Charge for approximately 2-3 hours until fully charged. The remote offers up to 35 days of battery life, and the collar up to 25 days.

5.2 Fitting the Collar

Proper fit of the collar is crucial for effective and safe operation.

1. Ensure the collar is turned off before fitting.
2. Place the receiver on your dog's neck, ensuring the contact points are positioned underneath, touching the skin.
3. Adjust the strap so it is snug but not too tight. You should be able to fit two fingers comfortably between the strap and your dog's neck.
4. If your dog has thick fur, you may need to trim the fur around the contact points to ensure proper skin contact.
5. The collar is designed for dogs with neck sizes from 6 to 27 inches and weights from 5 to 120 lbs.

Adjustable Strap

For All Size of Dogs



8-120 lbs



6. OPERATING INSTRUCTIONS

6.1 Turning On/Off

- **Remote Control:** Press and hold the power button until the screen illuminates/shuts off.
- **Collar Receiver:** Press and hold the power button until the indicator light turns on/off.

6.2 Selecting Training Modes and Levels

The remote control features dedicated buttons for each training mode:

- **Sound Mode:** Press the sound button to emit an audible tone. There are 9 different tones available.
- **Vibration Mode:** Press the vibration button to deliver a vibration. Levels 1-36 are adjustable.
- **Static Stimulation Mode:** Press the static stimulation button to deliver a safe static pulse. Levels 1-36 are adjustable.

To adjust the intensity level for Vibration or Static Stimulation, use the '+' and '-' buttons on the remote control. The current level will be displayed on the remote's screen.

6.3 Dual-Channel Operation

The remote supports training two dogs simultaneously.

- Use the channel switch button on the remote to toggle between Dog 1 and Dog 2.
- Ensure each collar receiver is paired to its respective channel (refer to pairing instructions if needed, typically automatic upon first power-on).

6.4 Security Lock

The remote control includes a security lock feature to prevent accidental static stimulation.

- To lock/unlock the static stimulation function, push the designated security lock switch (often labeled 'PUSH +') on the remote.
- When locked, static stimulation cannot be activated.

Security Lock

Say Goodbye to Accidental Shocks



Image 6.1: The remote control features a security lock to prevent accidental static stimulation and easy level adjustment.

6.5 LED Night Light

The collar receiver has a built-in LED light for visibility.

- Press the dedicated light button on the remote control to activate the LED light on the collar.
- This feature is useful for locating your dog during evening walks or in low-light conditions.

7. MAINTENANCE

- **Cleaning:** Regularly clean the collar strap and receiver with a damp cloth. Ensure the contact points are free of dirt and debris.

- **Battery Care:** To prolong battery life, avoid fully discharging the devices frequently. Charge them when the battery indicator is low. Store in a cool, dry place if not used for extended periods.
- **Water Exposure:** While the receiver is IPX7 waterproof, the remote control is not. Protect the remote from water exposure.
- **Contact Points:** Periodically check the contact points for wear and tear. Replace if necessary.

8. TROUBLESHOOTING

- **Device Not Turning On:** Ensure both the remote and receiver are fully charged.
- **No Response from Collar:**
 - Check if the collar receiver is turned on.
 - Verify that the remote and receiver are paired (re-pair if necessary, consult specific pairing instructions if provided in a separate guide).
 - Ensure the remote's battery is not low.
 - Check the range; you might be too far from the receiver.
- **Static Stimulation Not Working:**
 - Ensure the security lock on the remote is disengaged.
 - Check that the contact points are making proper contact with the dog's skin.
 - Use the test light tool to verify the static function.
- **Collar Causing Skin Irritation:**
 - Remove the collar immediately.
 - Check for proper fit; it might be too tight or worn for too long.
 - Clean the contact points and the dog's neck area.
 - Consult a veterinarian if irritation persists.

9. SPECIFICATIONS

Feature	Specification
Model Name	AB-T30
Item Weight	10.2 ounces
Item Package Dimensions	5.91 x 3.94 x 2.36 inches
Brand Name	ABBIDOT
Color	Ink Blue
Size	1 Collar
Material	Nylon
Number of Items	1

Feature	Specification
Breed Recommendation	All Breed Sizes
Specific Uses for Product	Behavior Training
Closure Type	Button
Remote Battery Life	Up to 35 days
Collar Battery Life	Up to 25 days
Waterproof Rating (Receiver)	IPX7
Range	3300 FT

10. WARRANTY AND SUPPORT

For warranty information, product support, or to address any concerns, please refer to the contact information provided with your purchase or visit the official ABBIDOT website. Keep your proof of purchase for warranty claims.