

Bnnwa K925

Bnnwa K925 Wireless Bluetooth Keyboard User Manual

Model: K925

INTRODUCTION

The Bnnwa K925 is a full-size wireless keyboard designed for multi-device connectivity, offering both 2.4GHz USB and Bluetooth connections. It features a numeric keypad, multimedia functions, and scissor-switch keys for quiet typing. This manual provides instructions for setting up, operating, and maintaining your K925 keyboard.

PACKAGE CONTENTS

- Bnnwa K925 Wireless Bluetooth Keyboard
- Nano USB Receiver
- User Manual

Note: 2 AAA batteries are not included and must be purchased separately.

SETUP

1. Battery Installation

1. Locate the battery compartment on the back of the keyboard.
2. Open the battery compartment cover.
3. Insert two AAA batteries, ensuring correct polarity (+/-).
4. Close the battery compartment cover.

COMPACT FULL-SIZE & ULTRA-THIN DESIGN



Image: The back of the Bnnwa K925 keyboard, illustrating the location of the battery compartment, the storage slot for the nano USB receiver, and the power on/off switch.

2. Power On/Off

Slide the power switch, located on the back of the keyboard, to the 'ON' position to power on the device. Slide it to 'OFF' when not in use to conserve battery life.

3. Connecting to Devices

The K925 keyboard supports connection to up to three devices simultaneously: one via 2.4GHz USB receiver and two via Bluetooth.

3.1. 2.4GHz USB Receiver Connection

1. Locate the nano USB receiver, typically stored in the battery compartment on the back of the keyboard.
2. Plug the USB receiver into an available USB port on your computer or device.
3. Press the **2.4G** key on the keyboard. The indicator light will illuminate, confirming the connection.
4. Your device should automatically recognize the keyboard.

3.2. Bluetooth Connection (BT1 and BT2)

1. Press and hold either the **BT1** or **BT2** key for 3-5 seconds until the corresponding indicator light flashes rapidly. This indicates the keyboard is in pairing mode.
2. On your device (e.g., computer, tablet, smartphone), navigate to the Bluetooth settings.
3. Search for available Bluetooth devices. You should see "Bnnwa K925" or a similar name.

4. Select the keyboard to pair. If prompted, enter the pairing code displayed on your screen using the K925 keyboard and press Enter.
5. Once paired, the indicator light will stop flashing and remain solid for a few seconds, then turn off.



Image: The Bnnwa K925 keyboard positioned on a desk, simultaneously connected to a laptop via Bluetooth, a desktop computer via 2.4GHz USB, and a tablet via Bluetooth, demonstrating its multi-device capability.

4. Switching Between Connected Devices

To switch between your connected devices, simply press the corresponding connection key:

- Press **2.4G** to connect to the device using the USB receiver.
- Press **BT1** to connect to the first Bluetooth-paired device.
- Press **BT2** to connect to the second Bluetooth-paired device.

The keyboard will quickly switch to the selected device, indicated by the brief illumination of the corresponding LED.

OPERATING INSTRUCTIONS

1. Basic Typing

The K925 features a standard QWERTY layout with a full numeric keypad. The scissor-switch keys provide a responsive and quiet typing experience.



Image: A clear, top-down view of the Bnwa K925 full-size wireless keyboard, showcasing its complete QWERTY layout and numeric keypad.

2. Multimedia and Function Keys

The top row of keys (F1-F12) provides quick access to multimedia and system functions. These functions are typically activated by pressing the **Fn** key simultaneously with the desired F-key, or directly depending on your operating system's settings.

Key	Function
F1	Decrease Brightness
F2	Increase Brightness
F3	Open Browser
F4	Task View
F5	Withdraw (e.g., undo)
F6	Search
F7	Previous Track
F8	Pause/Play
F9	Next Track
F10	Mute
F11	Volume Down
F12	Volume Up

Standard Layout Keyboard




Image: The Bnwa K925 keyboard with the F1-F12 keys highlighted, showing their respective multimedia and function icons.

3. Low Battery Indicator

When the keyboard's battery power is low, the low battery indicator light will flash red. This signals that the batteries need to be replaced soon.

4. Automatic Sleep Mode

To conserve power, the keyboard will automatically enter sleep mode after a period of inactivity. To wake it up, simply press any key.

5. Compatibility

The Bnwa K925 keyboard is compatible with a wide range of operating systems and devices, including:

- Windows (PC, Laptop)
- macOS
- iPadOS
- Android (Smartphone, Tablet)
- ChromeOS
- Linux

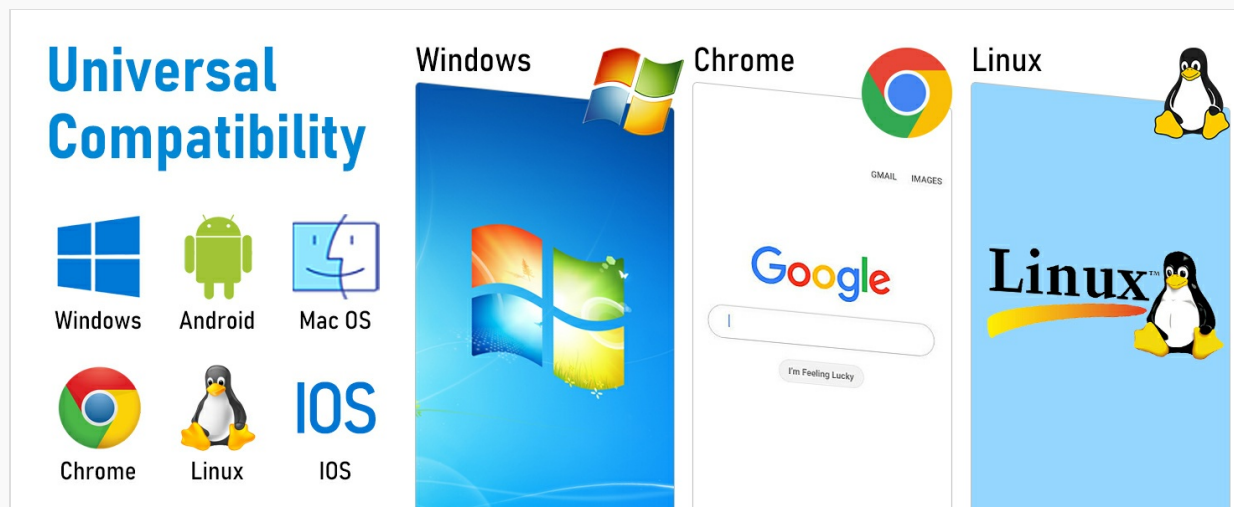


Image: A graphic displaying various operating system logos (Windows, Android, Mac OS, Chrome, Linux, iOS), signifying the keyboard's broad compatibility.

MAINTENANCE

1. Cleaning

To clean your keyboard, gently wipe the surface with a soft, damp cloth. Avoid using harsh chemicals or abrasive materials. Ensure the keyboard is powered off before cleaning.

2. Splash-Proof Surface

The keyboard features a splash-proof surface designed to resist minor liquid spills. In case of a spill, immediately power off the keyboard and allow it to dry completely before use.



Image: The Bnnwa K925 keyboard shown with water splashing across its surface, demonstrating its splash-proof design.

TROUBLESHOOTING

Common Issues and Solutions:

- **Keyboard not connecting:**
 - Ensure the keyboard is powered on.
 - For 2.4GHz connection, verify the USB receiver is securely plugged into a working USB port and the **2.4G** key is pressed.
 - For Bluetooth connection, ensure Bluetooth is enabled on your device, the keyboard is in pairing mode (flashing BT1/BT2 light), and you have selected the correct device to pair. Try unpairing and re-pairing if issues persist.
 - Check battery levels and replace if necessary.
- **Keys not responding or delayed input:**
 - Ensure the keyboard is within the effective operating range (up to 10 meters).
 - Check for interference from other wireless devices.
 - Replace batteries if the low battery indicator is flashing.
 - If using Bluetooth, try switching to the 2.4G connection if available, or vice versa, to rule out connection type issues.
- **Low battery indication:**
 - The low battery indicator on the device will flash red when the power is too low. Replace the two AAA batteries immediately.

SPECIFICATIONS

Feature	Detail
Model	K925
Connectivity Technology	Bluetooth, 2.4GHz USB-A
Keyboard Description	Multimedia, Full-size with Numeric Pad
Key Type	Scissor Switch
Special Features	Ergonomic, Hotkeys and Media Keys, Low-Profile Key, Silent, Multi-Device Switching
Compatible Devices	Laptop, PC, Smart TV, Smartphone, Tablet (iPadOS, MacOS, Windows, Android, ChromeOS, Linux)
Power Source	Battery Powered (2*AAA, not included)
Keyboard Layout	QWERTY
Color	Black gray
Item Weight	1.45 pounds
Package Dimensions	16.9 x 5.08 x 1.14 inches
Manufacturer	Bnnwa

WARRANTY AND SUPPORT

The Bnnwa K925 Wireless Bluetooth Keyboard comes with a 24-month warranty. For any product-related inquiries, technical support, or warranty claims, please refer to the contact information provided with your purchase or visit the official Bnnwa support channels.