

Wellmet DS-CRYS161

Wellmet Luxury 8-Tier Crystal Chandelier Instruction Manual

Model: DS-CRYS161

1. SAFETY INFORMATION

Please read and understand all instructions before beginning installation. Failure to do so may result in electric shock, fire, or other injuries that could be hazardous or even fatal.

- **WARNING:** To avoid electric shock, ensure power is turned off at the circuit breaker before installation.
- All wiring must be in accordance with national and local electrical codes. If you are unsure about wiring, consult a qualified electrician.
- Do not exceed the recommended wattage for bulbs.
- Handle crystal components with care to prevent breakage.
- Ensure the mounting surface can support the weight of the chandelier.

2. WHAT'S IN THE BOX

Carefully unpack all components and check against the list below. Retain packaging materials until installation is complete and satisfactory.

- Instruction Manual
- Metal Frame
- Crystal Droplets

3. PRODUCT DIMENSIONS AND BULB REQUIREMENTS

Products Size

SUITABLE FOR VARIOUS TYPES OF CEILING



Flat



Sloped



Vaulted



E12 Base

RECOMMENDED BULBS
(Bulbs Are Not included)



Image 1: This diagram illustrates the overall dimensions of the chandelier, including its 31.9-inch width and adjustable height (48.2 to 91.5 inches). It also shows the E12 bulb base and various compatible bulb types (bulbs not included).

Dimensions:

- Length: 31.9 inches
- Width: 31.9 inches
- Height: Adjustable from 48.2 inches to 91.5 inches (total height including chain)

Bulb Requirements:

- Bulb Base: E12
- Number of Bulbs: 17 (bulbs not included)
- Maximum Wattage per Bulb: 60W
- Compatible Bulb Types: Incandescent, Halogen, LED, Dimmable (E12 base only)

4. SETUP AND INSTALLATION

Professional installation is recommended. Ensure all power is disconnected at the circuit breaker before proceeding.

4.1 Pre-Installation

1. Turn off power at the main circuit breaker.
2. Unpack all components and inspect for any damage.
3. Identify all parts using the included parts list in the instruction manual.

4.2 Mounting the Fixture

1. Attach the mounting bracket to the junction box in the ceiling. Ensure it is securely fastened.
2. Determine the desired hanging height and adjust the chain length accordingly. The chain can be shortened by removing links.
3. Secure the canopy to the mounting bracket.

4.3 Wiring

1. Connect the fixture's ground wire to the house ground wire (usually bare copper or green).
2. Connect the fixture's neutral wire (usually white) to the house neutral wire (white).
3. Connect the fixture's hot wire (usually black) to the house hot wire (black).
4. Secure all wire connections with wire nuts and wrap with electrical tape.
5. Carefully tuck all wires into the junction box.

4.4 Attaching Crystal Droplets

CRYSTAL CHANDELIER

*Illuminate your home
with this crystal
chandelier!!!*

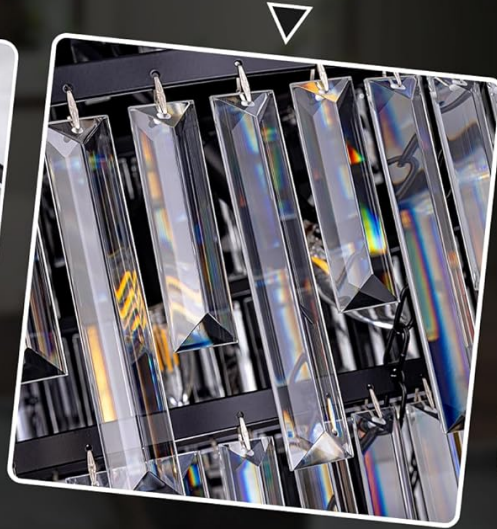


Image 2: This image provides a detailed view of the K9 crystal droplets and their attachment points on the metal frame, illustrating the cascading design.

1. Refer to the detailed crystal assembly diagram in the included instruction manual.
2. Carefully attach each crystal droplet to the designated hooks on the metal frame.
3. Ensure all crystals are securely fastened.

4.5 Bulb Installation

1. Screw the recommended E12 base bulbs into each socket. Do not overtighten.

5. OPERATING INSTRUCTIONS

Once installation is complete and verified, restore power at the circuit breaker.



Image 3: This image displays the chandelier in its unlit (left) and lit (right) states, demonstrating the illumination effect.

- Use a standard wall switch to turn the chandelier on and off.
- If dimmable bulbs are installed, a compatible dimmer switch is required for dimming functionality.

6. MAINTENANCE

Cleaning the Chandelier:

- **Always turn off power at the circuit breaker before cleaning.**
- For the metal frame, wipe with a soft, dry cloth. Do not use abrasive cleaners or polishes as they may damage the finish.
- For crystal droplets, gently wipe with a soft, lint-free cloth dampened with water or a mild glass cleaner. Avoid spraying cleaner directly onto the crystals or electrical components.
- Regular dusting will help maintain the chandelier's brilliance.

7. TROUBLESHOOTING

If you encounter issues, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	<ol style="list-style-type: none">1. Power is off2. Loose wiring3. Faulty bulb	<ol style="list-style-type: none">1. Check circuit breaker and wall switch2. Verify all wire connections (with power off)3. Replace bulb(s)
Flickering lights	<ol style="list-style-type: none">1. Loose bulb2. Incompatible dimmer switch3. Loose wiring	<ol style="list-style-type: none">1. Tighten bulb(s)2. Ensure dimmer is compatible with bulbs3. Check wiring connections (with power off)
Chandelier hangs unevenly	Improper mounting or chain adjustment	Adjust mounting bracket or chain links (with power off)

If problems persist, contact customer support.

8. SPECIFICATIONS

Feature	Detail
Brand	Wellmet
Model Number	DS-CRYS161
Color	Black
Material	Metal, Crystal
Style	Modern
Light Fixture Form	Chandelier
Room Type	Bedroom, Conference Room, Dining Room, Kitchen, Living Room
Indoor/Outdoor Usage	Indoor
Power Source	Corded Electric
Control Method	Push Button (via wall switch)
Light Source	LED compatible (bulbs not included)
Number of Light Sources	17

Feature	Detail
Voltage	110 Volts
Wattage	Max 60W per bulb (Total 1020W max)
Bulb Base	E12
Mounting Type	Ceiling Mount
Installation Type	Semi Flush Mount
Required Assembly	Yes
Item Dimensions (L x W x H)	31.9" x 31.9" x 45.9" (Adjustable height)

9. WARRANTY INFORMATION

This Wellmet chandelier comes with a **1-year manufacturer's warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

The warranty does not cover damage caused by improper installation, misuse, accidents, modifications, or normal wear and tear. For warranty claims or replacement parts due to transit damage, please contact Wellmet customer support.

10. CUSTOMER SUPPORT

For any questions, assistance with installation, troubleshooting, or to report damaged parts, please contact Wellmet customer support. Refer to your purchase documentation or the Wellmet official website for contact details.

Please have your model number (DS-CRYS161) and purchase date available when contacting support.