FEYA H360

FEYA Motorcycle Helmet Headset H360 User Manual

Model: H360

1. INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, and maintenance of your FEYA Motorcycle Helmet Headset H360. Please read this manual thoroughly before using the product to ensure proper functionality and safety.

2. PRODUCT OVERVIEW

2.1 Key Features

The FEYA H360 Helmet Headset is designed to provide a seamless audio experience while riding. Key features include:

- **Wireless 5.3 Connectivity:** For stable and fast connections.
- **Active Noise Reduction:** Enhances audio clarity by minimizing ambient noise.
- **Wireless Remote Control:** Convenient control of music and calls.
- **LED Power Display:** Provides clear battery status indication.
- **HD Sound Quality:** Delivers clear and rich audio.
- **Extended Standby Time:** Up to 50 hours of standby.
- **IPX4 Waterproof Rating:** Offers protection against splashes from any direction.

Figure 1: Overview of FEYA H360 Helmet Headset highlighting Wireless 5.3, Active Noise Reduction, Wireless Remote Control, LED

2.2 Components and Controls

The FEYA H360 system includes the main headset units, a charging case, and a wireless remote control. Familiarize yourself with the remote control's functions:

Figure 2: Detailed view of the wireless remote control, showing buttons for Volume Up/Previous Song, Music Play/Pause/Call Answer/End, Volume Down/Next Song, Control Indicator Light, and Remote Control Charging Port.

- **Volume Up** / **Previous Song Button:** Press to increase volume; long press for previous track.
- **Music Play/Pause** / **Call Answer/End Button:** Press to play/pause music; press to answer/end calls.
- **Volume Down** / **Next Song Button:** Press to decrease volume; long press for next track.
- **Control Indicator Light:** Displays device status (e.g., pairing, charging).
- **Remote Control Charging Port:** For recharging the remote control.

3. SETUP AND INSTALLATION

3.1 Headset Installation in Helmet

Follow these steps to correctly install the FEYA H360 headset into your motorcycle helmet:

1. **Prepare Earphones:** Tear off the white protective paper from the adhesive backing of the Hook and Loop fasteners.
2. **Attach to Earphones:** Securely attach the Hook and Loop fasteners to the back of each earphone unit.
3. **Prepare Helmet:** Identify the ear pockets or flat surfaces inside your helmet where the earphones will sit comfortably. Clean the surface if necessary.
4. **Attach to Helmet:** Attach the corresponding Hook and Loop fasteners to the inside of the helmet, ensuring they

align with the earphone placement.

5. **Mount Earphones:** Press the earphones firmly onto the Hook and Loop fasteners inside the helmet.

Figure 3: Visual guide for installing the headset earphones into a helmet, showing steps from preparing fasteners to final placement.
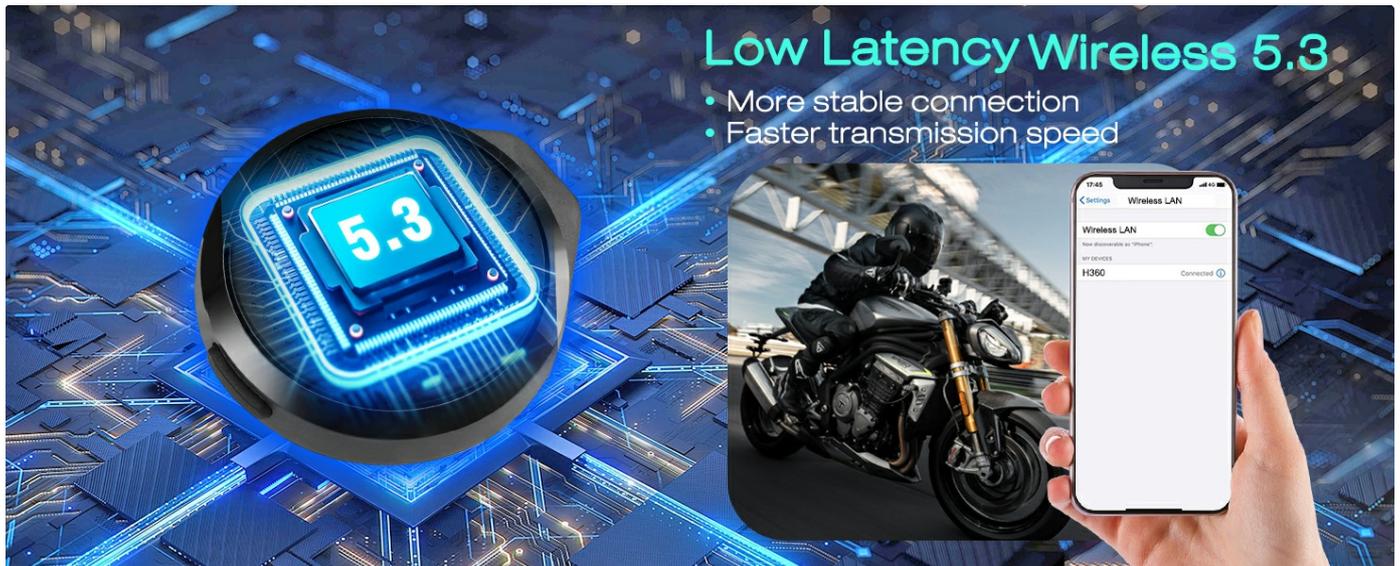
3.2 Helmet Compatibility

The FEYA H360 is designed for compatibility with various helmet types, including:

- Full face helmets
- Half face helmets
- Three quarter face helmets
- Flip face helmets
- Ski helmets

3.3 Initial Pairing

To connect your FEYA H360 headset to a mobile device:

1. Ensure the headset units are charged and powered on.
2. Activate Bluetooth on your mobile device.
3. Search for available devices. The headset should appear as "H360".
4. Select "H360" to pair. A confirmation tone will indicate successful pairing.

Figure 4: Illustration of the FEYA H360 headset connecting to a smartphone via Bluetooth 5.3, demonstrating stable and fast transmission.

4. OPERATING INSTRUCTIONS

4.1 Power On/Off

- **Power On:** Press and hold the main button on the headset or remote control until the indicator light illuminates.
- **Power Off:** Press and hold the main button until the indicator light turns off.

4.2 Music Playback

- **Play/Pause:** Press the Music Play/Pause button on the remote control.
- **Next Song:** Long press the Volume Down button.

- **Previous Song:** Long press the Volume Up button.
- **Volume Adjustment:** Press the Volume Up or Volume Down buttons.

Figure 5: The FEYA H360 headset delivers HiFi sound quality and 3D stereo audio for an immersive listening experience.

4.3 Call Management

- **Answer Call:** Press the Call Answer/End button on the remote control.
- **End Call:** Press the Call Answer/End button during a call.
- **Reject Call:** Long press the Call Answer/End button when an incoming call rings.

4.4 Charging

The headset units are charged via the included charging case. The remote control has its own charging port.

- **Headset Charging:** Place the headset units into the charging case. The LED display on the case will show the battery level and individual earphone charging status (L/R).
- **Remote Control Charging:** Connect a suitable charging cable to the remote control charging port.

Figure 6: The FEYA H360 offers 20 hours of use with the charging case and 6.5 hours on a single charge. The charging case features an LED display for battery level and individual earphone charging status.

A full charge provides approximately 6.5 hours of usage for the earphones, with the charging case extending total usage to about 20 hours.

5. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the headset units and remote control. Avoid using abrasive cleaners or solvents.
- **Storage:** Store the headset in its charging case when not in use. Keep the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Water Exposure:** While IPX4 rated, avoid submerging the device in water. Dry immediately if exposed to splashes.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not power on.	Low battery.	Charge the headset and remote control fully.
Cannot pair with mobile device.	Bluetooth is off; device out of range; already paired to another device.	Ensure Bluetooth is on. Move devices closer. Disconnect from other devices. Restart pairing process.
No sound or poor sound quality.	Volume too low; headset not properly seated; interference.	Increase volume. Adjust headset position. Move away from sources of interference.
Remote control unresponsive.	Low battery in remote control.	Charge the remote control.

7. SPECIFICATIONS

Feature	Detail
Model Number	H360
Connectivity	Wireless 5.3
Waterproof Rating	IPX4
Earphone Battery Life (single charge)	Up to 6.5 hours
Total Battery Life (with charging case)	Up to 20 hours
Standby Time	Up to 50 hours
Item Weight	9.5 ounces
Package Dimensions	7.17 x 4.02 x 1.77 inches
Manufacturer	FEYA

8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation included with your purchase or visit the official FEYA website. Keep your proof of purchase for warranty claims.
For further assistance, you may contact FEYA customer service through their official channels.