

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

- › [SHISUO](#) /
- › SHISUO Wireless Lavalier Microphone A5 User Manual

SHISUO A5

SHISUO Wireless Lavalier Microphone A5 User Manual

Model: A5 | Brand: SHISUO

INTRODUCTION

This manual provides detailed instructions for the SHISUO A5 Wireless Lavalier Microphone system. Designed for clear audio recording, this system includes two transmitters and two receivers, offering versatile connectivity for various devices. Please read this manual thoroughly to ensure proper usage and optimal performance of your microphone system.

WHAT'S IN THE BOX

The SHISUO A5 Wireless Lavalier Microphone system comes with the following components:

- 1 x Charging Case
- 2 x Wireless Transmitters (Microphones)
- 2 x 3-in-1 Universal Receivers (Lightning/USB-C/USB-A)
- 2 x Monitoring Earphones
- 2 x Pro Furry Windscreens
- 1 x USB-C Charging Cable
- 1 x User Manual



Image: Complete Creator Toolkit showing all included accessories.

PRODUCT OVERVIEW

The SHISUO A5 system features compact wireless transmitters and versatile receivers designed for ease of use and high-quality audio capture. The charging case provides extended battery life and convenient storage.



Image: The SHISUO A5 Wireless Lavalier Microphone in white and silver.



10H + 30H = 40H

All-Day Power for Non-Stop Creativity.

10 hours per mic | 4-5 full recharges via the case | Total 40 hours of runtime.

Image: Product dimensions for the microphone and charging case.

SETUP

- 1. Charge the Devices:** Before first use, fully charge the transmitters and the charging case using the provided USB-C cable. The charging case has indicator lights to show battery status.
- 2. Power On:** Take the transmitters out of the charging case. They will automatically power on and attempt to pair with a receiver.

3. **Connect Receiver:** Plug the appropriate 3-in-1 receiver (Lightning for iPhone, USB-C for Android/iPad, or USB-A for PC) into your recording device. The receiver will automatically connect to the transmitters. A solid blue light on the receiver indicates a successful connection.
4. **Position Microphone:** Clip the transmitter onto your clothing, ideally near your mouth, for optimal sound capture. The magnetic attachment option provides flexibility.



Image: The versatile 3-in-1 receiver for various device connections.



Image: Connectivity diagram illustrating compatibility with multiple devices.

OPERATING INSTRUCTIONS

Noise Reduction

The SHISUO A5 features AI noise reduction to minimize ambient sounds. To activate or deactivate noise reduction, press the designated button on the transmitter. A green indicator light typically signifies active noise reduction.



Image: Illustration of AI noise cancellation in action.

Reverb Feature

For creative audio effects, the microphone includes a reverb function. Press the reverb button on the transmitter to cycle through different reverb modes or to turn it off.

Audio Monitoring

Connect the provided monitoring earphones to the receiver to listen to your audio in real-time. This allows you to ensure clear sound capture and adjust your speaking volume or microphone placement as needed.

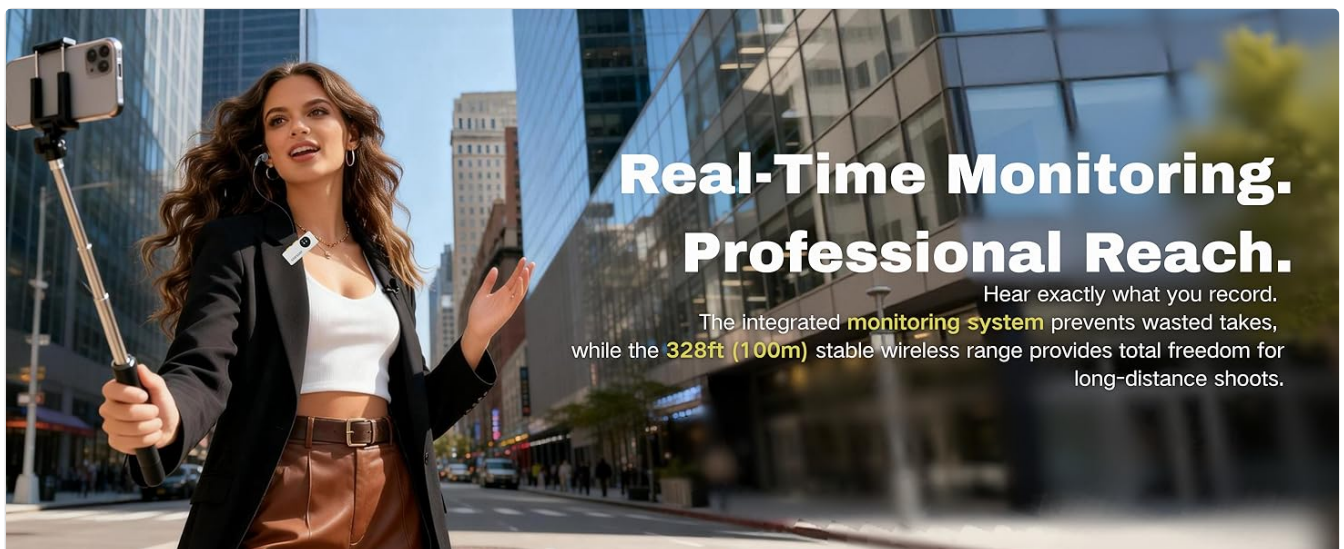


Image: Real-time audio monitoring and stable wireless range.

Two-Person Recording

With two transmitters and two receivers, the system supports simultaneous two-person recording. Each person can wear a microphone, and both audio streams will be captured by their respective connected devices.



Both microphones sync instantly to a single high-quality mono track, providing consistent and balanced audio levels for ipinterviews and co-hosted vlogs.

Image: Dual recording setup for two-person content.

Usage Scenarios

The SHISUO A5 is suitable for various recording environments, including vlogging, live streaming, interviews, and general content creation. Its compact size and wireless capability offer flexibility for both indoor and outdoor use.

Video: Demonstrates the sound quality comparison of the lavalier microphone before and after use, highlighting its effectiveness in reducing background noise.

Video: Showcases various usage scenarios for the wireless lavalier microphone, including outdoor recording and interviews.

CHARGING AND BATTERY LIFE

The SHISUO A5 system is designed for extended use with a total playtime of up to 40 hours when utilizing the charging case. Each microphone provides approximately 10 hours of continuous use on a single charge.

- **Charging Microphones:** Place the transmitters into the charging case. They will automatically begin charging.
- **Charging Case:** Connect the USB-C charging cable to the charging case and a power source. The indicator lights on the case will show the charging status.
- **Charging Time:** A full charge for the case and microphones typically takes about 2.5 hours.



Image: Battery life details for the SHISUO A5 system.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the microphones, receivers, and charging case. Avoid using liquids or abrasive cleaners.
- **Windscreens:** Attach the furry windscreens when recording in windy conditions to reduce wind noise. Remove them before placing microphones in the charging case.
- **Storage:** Store the microphone system in its charging case when not in use to protect the devices and ensure they remain charged.

Information/product list

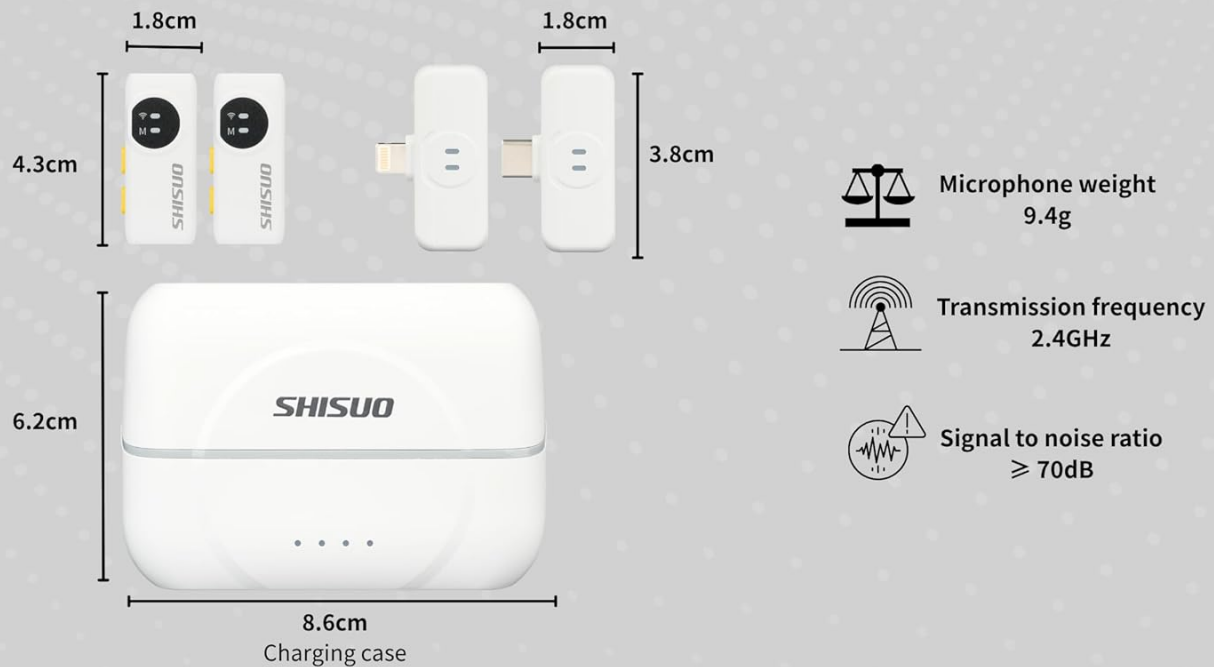


Image: Microphone with furry windscreen for noise reduction.

TROUBLESHOOTING

Problem	Solution
No sound or low volume	Ensure the receiver is securely plugged into your device. Check microphone and device volume settings. Confirm microphones are powered on and paired (solid blue light on receiver).

Problem	Solution
Poor audio quality / Excessive background noise	Activate the noise reduction feature. Use furry windscreens in outdoor or windy environments. Ensure the microphone is positioned correctly, close to the sound source.
Microphone not pairing	Ensure both the transmitter and receiver are sufficiently charged. Power cycle both devices. Try pairing in a less crowded wireless environment.
Short wireless range	Ensure there are no major obstructions between the transmitter and receiver. Avoid strong electromagnetic interference.

SPECIFICATIONS

Feature	Detail
Model Name	A5
Connectivity Technology	2.4GHz
Connector Type	USB Type-C/USB/USB-C/Lightning (3-in-1 Universal Receiver)
Special Feature	Noise Reduction
Compatible Devices	iPhone, Android, PC, Tablets
Item Weight	3.2 Ounces (Total)
Microphone Form Factor	Lavalier
Power Source	Battery Powered
Signal-to-Noise Ratio	58 dB
Frequency Response	20 KHz
Wireless Range	Up to 328ft (100m)
Battery Life	Up to 40 hours with charging case (10 hours per mic)

WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the contact details provided in the packaging or visit the official SHISUO website. Keep your purchase receipt for warranty claims.