

[Manuals.plus](#) /

> [OMOTON](#) /

> OMOTON Foldable Bluetooth Keyboard with Touchpad (QWERTZ Layout) - User Manual

OMOTON B0FCMD15TF

OMOTON Foldable Bluetooth Keyboard with Touchpad (QWERTZ Layout)

Model: B0FCMD15TF

Brand: OMOTON

1. INTRODUCTION

Thank you for choosing the OMOTON Foldable Bluetooth Keyboard with Touchpad. This portable QWERTZ keyboard is designed for convenience and efficiency, offering multi-device connectivity and an integrated touchpad. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance.

2. PACKAGE CONTENTS

Please check the package for the following items:

- OMOTON Foldable Bluetooth Keyboard
- Cell Phone Stand
- Type-C Charging Cable
- Carrying Case
- User Manual

3. PRODUCT OVERVIEW

The OMOTON Foldable Bluetooth Keyboard features a compact QWERTZ layout with 78 full-size keys and a multi-touch touchpad. It supports connection to up to three devices simultaneously across iOS, Android, and Windows operating systems. Its magnetic folding design makes it highly portable.



Image 3.1: The OMOTON Foldable Bluetooth Keyboard in use with a tablet, smartphone, and monitor, demonstrating multi-device connectivity via BT1, BT2, and BT3 channels.

Key Features:

- **Tri-fold Design:** Compact and portable for travel.
- **Integrated Touchpad:** Multi-touch functionality for navigation without an external mouse.
- **Multi-Device Connectivity:** Connects to up to three Bluetooth-enabled devices (BT1, BT2, BT3).
- **QWERTZ Layout:** Standard German keyboard layout with 78 full-size keys.

- **Rechargeable Battery:** Built-in 180mAh battery with Type-C charging.



Image 3.2: Close-up details of the keyboard, highlighting its magnetic closure, indicator lights, silent scissor keys, elegant PU leather finish, and durable metal hinge.

Portability:

The keyboard's compact, tri-fold design makes it ideal for travel and on-the-go use. It easily fits into bags and pockets, making it a convenient companion for various environments.

Caffetteria



In aereo



Sala riunioni

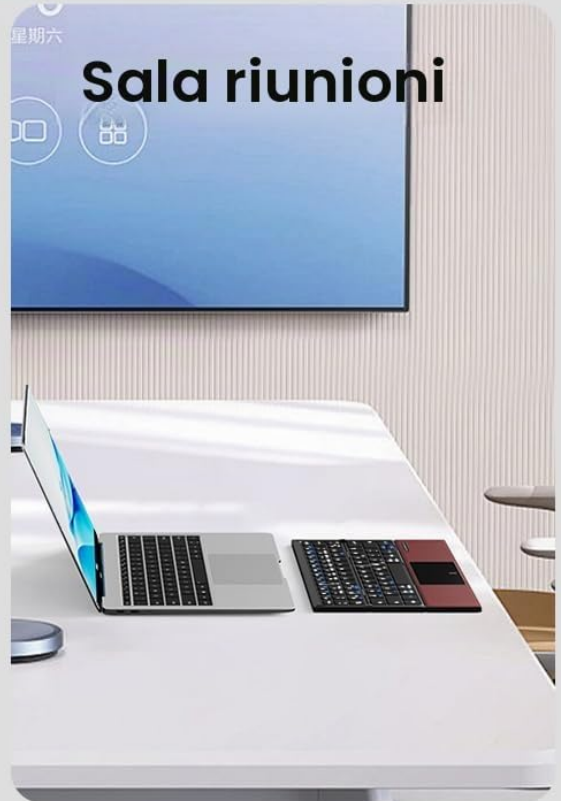


Image 3.3: The keyboard in use in a cafe, on an airplane, and in a meeting room, demonstrating its versatility for different work and travel scenarios.

Dimensioni portatili

Salvaspazio e utilizzabile ovunque



Image 3.4: The folded keyboard being placed into a carrying case inside a bag and slipped into a jacket pocket, illustrating its compact size and ease of transport.

4. SETUP

4.1 Charging the Keyboard

Before first use, fully charge the keyboard. Use the included Type-C charging cable to connect the keyboard to a power source

(e.g., computer USB port, USB wall adapter).

- The power indicator light will show charging status.
- A full charge typically takes 2-3 hours.
- The keyboard offers up to 60 hours of operating time and 90 days of standby time on a full charge.

Typ C-Aufladung



**2-3 Stunden
Ladezeit**



**60 Stunden
Arbeitszeit**



**90 Tage
Standby-Zeit**



Image 4.1: The keyboard connected via its Type-C port for charging, with icons indicating charging time, working time, and standby time.

4.2 Pairing with a Device

The keyboard supports up to three Bluetooth connections (BT1, BT2, BT3). Follow these steps to pair your keyboard with a device:

1. **Power On:** Unfold the keyboard to automatically power it on. The indicator light will flash.
2. **Select Channel:** Press the **Fn + BT1**, **Fn + BT2**, or **Fn + BT3** keys simultaneously to select a Bluetooth channel. The corresponding indicator light will flash slowly.
3. **Enter Pairing Mode:** Press **Fn + C** (or the Bluetooth icon key) to enter pairing mode. The selected channel indicator light will flash rapidly.
4. **Enable Bluetooth on Device:** On your device (smartphone, tablet, laptop), go to Bluetooth settings and turn on Bluetooth.
5. **Select Keyboard:** Search for "OMOTON Keyboard" (or similar) in the list of available devices and select it to connect.
6. **Confirm Connection:** Once connected, the indicator light on the keyboard will stop flashing and remain solid for a few seconds before turning off.

Note: The Type-C cable is for charging only and does not support wired connectivity.

4.3 Switching Between Devices

To switch between paired devices, simply press **Fn + BT1**, **Fn + BT2**, or **Fn + BT3** to select the desired channel. The keyboard will automatically connect to the last paired device on that channel.

5. OPERATING INSTRUCTIONS

5.1 Keyboard Layout and Special Keys

The keyboard features a QWERTZ layout with 78 standard keys and 12 multimedia shortcuts. Familiarize yourself with the layout for efficient typing.

Standardschlüssel in Voller Größe

Präzises Multi-Touch-Touchpad



Image 5.1: The keyboard displaying its full-size keys and integrated multi-touch touchpad, designed for a laptop-like typing experience.

5.2 Using the Touchpad

The multi-touch touchpad supports various gestures for navigation. This eliminates the need for an external mouse.

- **Single Finger Tap:** Left-click.
- **Two Finger Tap:** Right-click (context menu).
- **Two Finger Scroll:** Scroll up/down or left/right.

- **Pinch to Zoom:** Zoom in/out (supported on some devices/apps).
- **Swipe Gestures:** Specific gestures may vary by operating system (Windows, Android, iOS).

Note for iPad users: You may need to enable "AssistiveTouch" in your iPad settings for full touchpad functionality. Some gestures may vary between applications. Scrolling direction can be adjusted in your device settings.

5.3 Power Saving Mode

To conserve battery, the keyboard will automatically enter sleep mode after 30 minutes of inactivity. To wake it up, press any key.

5.4 Ergonomic Usage

For comfortable and ergonomic typing, ensure your screen is positioned correctly to maintain a healthy posture.



Stellen Sie den Bildschirm Richtig

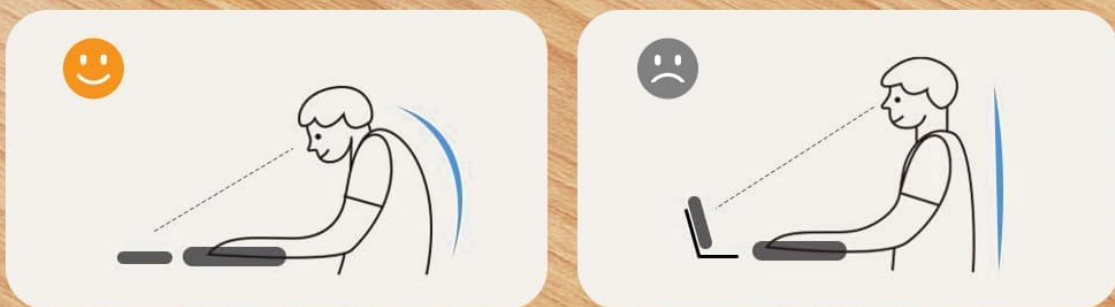


Image 5.2: A visual guide showing the recommended ergonomic posture for using the keyboard with a screen, emphasizing proper neck and back alignment.

6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the keyboard surface. For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution. Avoid excessive moisture.
- **Storage:** When not in use, fold the keyboard and store it in the provided carrying case to protect it from dust and scratches.

- **Battery Care:** Avoid fully discharging the battery frequently. Charge the keyboard regularly, especially if it will be stored for an extended period.
- **Avoid Extreme Conditions:** Do not expose the keyboard to extreme temperatures, direct sunlight, or high humidity.

7. TROUBLESHOOTING

7.1 Keyboard Not Connecting

- Ensure the keyboard is powered on (unfolded).
- Make sure Bluetooth is enabled on your device.
- Check if the keyboard is in pairing mode (indicator light flashing rapidly after pressing Fn+C).
- Ensure you have selected the correct Bluetooth channel (BT1, BT2, or BT3).
- Try unpairing and re-pairing the keyboard from your device's Bluetooth settings.
- Ensure the keyboard battery is charged.

7.2 Touchpad Not Responding

- Ensure the keyboard is properly connected via Bluetooth.
- For iPad users, verify that "AssistiveTouch" is enabled in your iPad settings.
- Restart the keyboard and your device.
- Clean the touchpad surface to remove any dirt or debris.

7.3 Incorrect Key Output (QWERTZ vs. QWERTY)

- This keyboard has a QWERTZ layout. Ensure your device's software keyboard setting is also set to QWERTZ (German layout) for correct character output.
- If your device is set to QWERTY, some keys (e.g., Y/Z, special characters) will not match the physical keyboard. Adjust your device's input language/keyboard layout settings.

7.4 Short Battery Life

- Ensure the keyboard is fully charged before use.
- The keyboard automatically enters sleep mode after 30 minutes of inactivity to save power.
- Avoid leaving the keyboard unfolded and powered on when not in use for extended periods.

8. SPECIFICATIONS

Brand	OMOTON
Model	B0FCMD15TF
Connectivity Technology	Bluetooth
Compatible Devices	iPadOS, iOS, Android, Windows (Laptops, PCs, Tablets, Smartphones)
Keyboard Layout	QWERTZ (German Layout)
Number of Keys	78
Special Features	Foldable, Portable, Rechargeable, Integrated Multi-touch Touchpad
Material	Plastic, Polyurethane (PU)
Battery Capacity	180 mAh Li-ion

Charging Port	Type-C
Charging Time	Approx. 2-3 hours
Operating Time	Up to 60 hours
Standby Time	Up to 90 days
Folded Dimensions	25.3 x 6 x 2.1 cm

Klappbare Kabellose Tastatur



Image 8.1: Visual representation of the keyboard's dimensions when unfolded and folded, alongside a tablet and smartphone for scale.

9. WARRANTY & SUPPORT

OMOTON products come with a standard warranty. For detailed warranty information, please refer to the warranty card included in your package or visit the official OMOTON website.

If you encounter any issues or have questions regarding your OMOTON Foldable Bluetooth Keyboard, please contact OMOTON Customer Support:

- **Website:** [OMOTON Official Store on Amazon](#)

Please have your model number (B0FCMD15TF) and purchase details ready when contacting support.