

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [LEFFOT](#) /

› [LEFFOT M1 Plus Android 14 TV Box: User Manual](#)

LEFFOT M1 Plus

LEFFOT M1 Plus Android 14 TV Box: User Manual

Model: M1 Plus

INTRODUCTION

This manual provides essential information for setting up, operating, and maintaining your LEFFOT M1 Plus Android 14 TV Box. Please read it thoroughly to ensure proper usage and to maximize your entertainment experience.

WHAT'S IN THE BOX

Verify that all items listed below are included in your package:

- 1 x LEFFOT M1 Plus Android 14 TV Box
- 1 x Voice Remote Control
- 1 x Power Adapter
- 1 x HD Cable
- 1 x User Manual

Packing List



Image: The package contents, including the LEFFOT M1 Plus TV Box, voice remote, power adapter, HD cable, and user manual.

PRODUCT OVERVIEW

The LEFFOT M1 Plus is a compact 4K Ultra HD streaming device designed to enhance your television experience. It features a sleek design with various ports for connectivity.

Dimension & Interface

Connecting external devices & expanding functionality

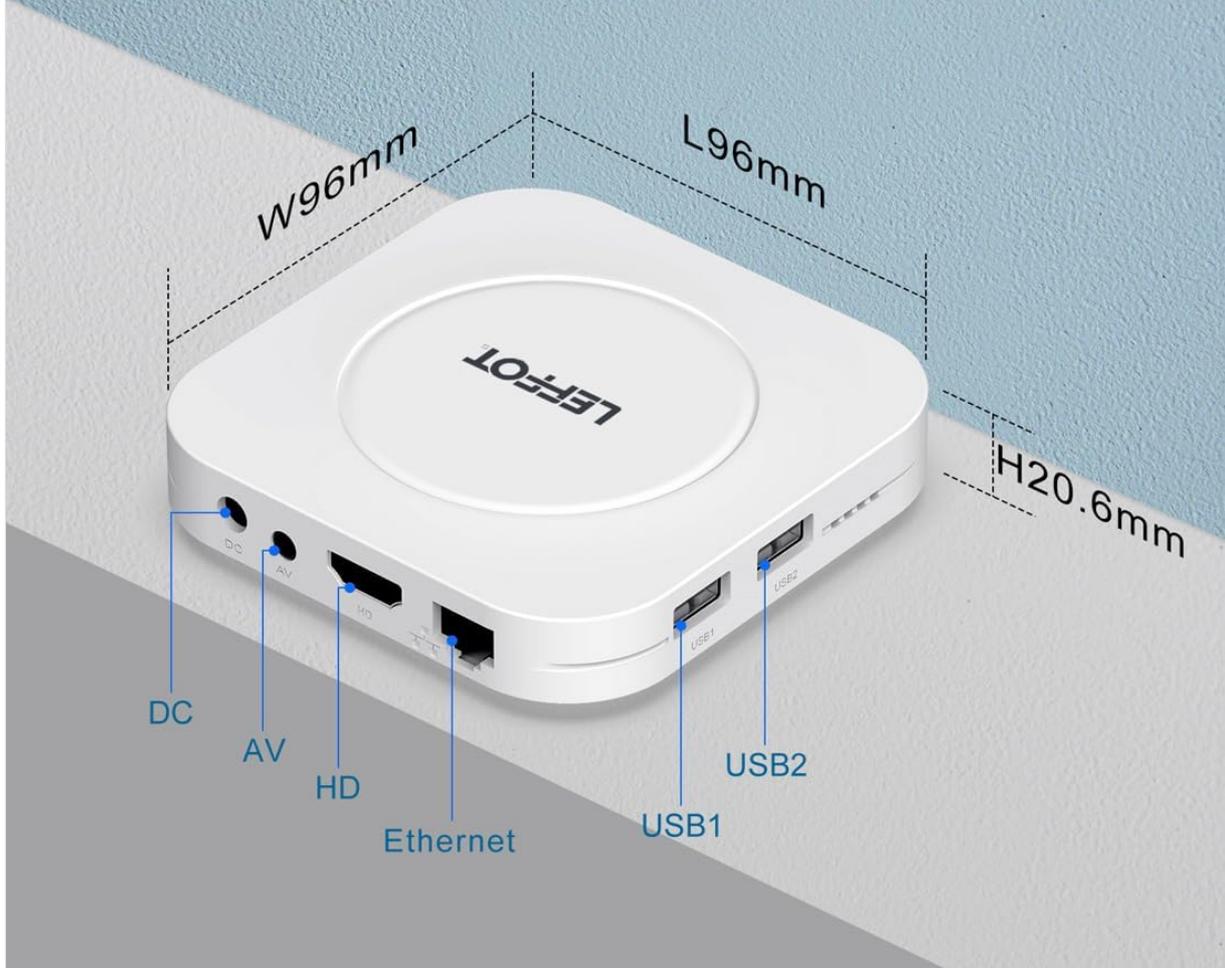


Image: A diagram illustrating the dimensions (L96mm x W96mm x H20.6mm) and various interface ports on the LEFFOT M1 Plus TV Box, including DC, AV, HD, Ethernet, USB1, and USB2.

Key Interfaces:

- **DC Power Input:** For connecting the power adapter.
- **AV Port:** For older televisions or audio systems.
- **HD (HDMI) Output:** Connects to your TV for high-definition video and audio.
- **LAN (Ethernet) Port:** For wired internet connection.
- **USB 1 & USB 2 Ports:** For connecting external storage devices, game controllers, or other USB accessories.
- **SPDIF:** Digital audio output.

SETUP

Follow these steps to set up your LEFFOT M1 Plus TV Box:

1. **Connect to TV:** Connect one end of the provided HD cable to the HDMI port on your LEFFOT M1 Plus TV Box and the other end to an available HDMI input on your television.
2. **Connect Power:** Plug the power adapter into the DC power input on the TV Box, then plug the

adapter into a wall outlet. The device will power on automatically.

3. **Insert Remote Batteries:** Open the battery compartment on the back of the voice remote control and insert two AAA batteries (not included), ensuring correct polarity.
4. **Initial Boot & Wi-Fi Setup:** Turn on your TV and select the correct HDMI input. The TV Box will boot up. Follow the on-screen instructions to connect to your Wi-Fi network and log in with your Google Account.



Image: A visual guide demonstrating the three main setup steps: attaching the TV Box to the TV's HDMI port, connecting to the internet, and starting to stream content.

Setup Video Guide

Video: An unboxing and installation guide for the LEFFOT M1 Plus TV Box, demonstrating how to connect the device and establish a network connection.

OPERATING INSTRUCTIONS

Navigation and Interface

The LEFFOT M1 Plus runs on Android 14 OS, providing a user-friendly interface. Navigate using the included voice remote control. The home screen provides quick access to your favorite apps and content.

4K Ultra HD IMAGE QUALITY



4K Ultra HD resolution showcases every detail with exceptional clarity

Image: The Android TV home screen displaying popular streaming applications like Netflix, Hulu, Prime Video, and YouTube, indicating access to over 5000 apps.

Voice Control with Google Assistant

Utilize the built-in Google Assistant via the BT 5.4 voice remote for hands-free control. Simply press the Google Assistant button on the remote and speak your commands to search for content, control playback, or check information.

Bluetooth Voice Remote

Built-in Google assistant

Experience natural interaction with voice remote
Voice commands, unlock effortless smart living



Image: A person using the Bluetooth Voice Remote to interact with Google Assistant on a TV, with examples of voice commands like 'Ok Google' and 'Hey Google, workout music'.

4K Ultra HD Streaming

Experience stunning visuals with 8K@23fps decoding and 4K@60fps HDR10 output. The device supports a wide range of streaming services, delivering breathtaking clarity and vibrant colors.

8K Ultra HD Decoding Experience Cinema Visuals

Experience stunning native 4K UHD10 quality
Enjoy vibrant colors, deeper contrasts, and sharper details,
making every scene come to life



Image: A visual comparison demonstrating the superior clarity and detail of 8K Ultra HD and 4K Ultra HD resolutions compared to 1080p Full HD, highlighting the device's 8K decoding and HDR10 capabilities.

Seamless Connectivity

The M1 Plus offers stable and fast connectivity options including dual-band WiFi6 (802.11ax) and 100M Ethernet for buffer-free streaming. Bluetooth 5.4 allows for connection to various peripherals.

Search Home Discover

2.4G & 5G Dual-band WiFi 6

Stable and fast connection, eliminating buffering and lag, Enjoy buttery-smooth 4K playback

2.4G&5G WiFi 6



100M Ethernet

802.11 a/b/g/n/ac/ax



Image: A graphic showcasing the device's stable and fast connectivity features, including 2.4G & 5G Dual-band WiFi 6 (802.11 a/b/g/n/ac/ax) and 100M Ethernet, ensuring smooth 4K playback.

Screen Mirroring

Easily share photos and videos from your phones or tablets to your TV using Airplay, DLNA, or WiFidisplay features.



Image: An infographic highlighting the device's internal components (Rockchip RK3528 Quad-Core CPU, Mali-450 MP2 GPU, RAM/ROM options) and connectivity features like Bluetooth 5.4 and screen casting via Airplay, DLNA, and WiFidisplay.

Official Product Video

Video: A short demonstration of the Google AndroidTV Box, showcasing its voice remote control capabilities.

SPECIFICATIONS

Feature	Description
Brand	LEFFOT
Model Name	M1 Plus
Operating System	Android 14.0
Processor	RK3528 Quad-Core A53 CPU
GPU	Mali-450 MP2
RAM	2GB

ROM	16GB
Resolution	8K decoding, 4K@60fps HDR10 output
Connectivity	2.4G & 5G WiFi 6 (802.11ax), Bluetooth 5.4, 100M Ethernet
Special Features	Google Assistant Voice Remote, Airplay, DLNA, WiFidisplay
Ports	Dual USB 2.0, HD 2.0b, AV, LAN, DC, SPDIF
Dimensions	3.8 x 3.8 x 0.81 inches
Weight	4.4 ounces

TROUBLESHOOTING

If you encounter issues with your LEFFOT M1 Plus, refer to the following common solutions:

- **No Power:** Ensure the power adapter is securely connected to both the device and a working power outlet. Try a different outlet.
- **No Signal on TV:** Verify that the HD cable is properly connected to both the TV Box and your TV. Ensure your TV is set to the correct HDMI input source.
- **Wi-Fi Connection Issues:** Check your router and modem to ensure they are working correctly. Re-enter your Wi-Fi password on the TV Box. If using 5G Wi-Fi, ensure your device is within range.
- **Remote Control Not Responding:** Check if the batteries are correctly inserted and have sufficient charge. Try re-pairing the Bluetooth remote if necessary (refer to on-screen instructions during initial setup or in device settings).
- **App Freezing/Crashing:** Close and restart the application. If the issue persists, clear the app's cache or data in the device settings (Settings > Apps > [App Name] > Clear Cache/Clear Data).
- **Poor Video Quality:** Ensure your internet connection is stable and fast enough for 4K streaming. Check your TV's display settings and the streaming app's quality settings.

MAINTENANCE

To ensure the longevity and optimal performance of your LEFFOT M1 Plus TV Box:

- Keep the device in a cool, dry place away from direct sunlight and heat sources.
- Clean the device with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- Avoid blocking any ventilation openings (though this model has no external vents, ensure it's not covered).
- Regularly check for and install system updates to ensure the latest features and security patches.

WARRANTY AND SUPPORT

Your LEFFOT M1 Plus TV Box comes with a standard manufacturer's warranty. For specific warranty terms and conditions, please refer to the documentation included in your package or contact LEFFOT customer support.

For technical assistance or further inquiries, please visit the official LEFFOT website or contact their customer service team.

