



Manuals.plus /

- › qimedo /
- › qimedo V1 Cordless Vacuum Cleaner Instruction Manual

## qimedo V1 (Model RD-101)

# qimedo V1 Cordless Vacuum Cleaner Instruction Manual

Brand: qimedo | Model: V1 (RD-101)

## 1. INTRODUCTION

Thank you for choosing the qimedo V1 Cordless Vacuum Cleaner. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your new appliance. Please read it thoroughly before first use and keep it for future reference.

# Battery Vacuum Cleaner

The removable battery design means you don't have to worry about battery life.



Image: qimedo V1 Cordless Vacuum Cleaner highlighting its removable battery, 60KPA suction power, and 12000RPM Max Mode.

## 2. PACKAGE CONTENTS

Your qimedo V1 Cordless Vacuum Cleaner package includes the following items:

- Main Vacuum Unit with 8000mAh Battery
- Floor Nozzle with LED Light
- 27.3-inch Extension Tube
- Crevice Nozzle
- 2-in-1 Brush Head
- Charging Adapter
- Wall Mount Hook
- User Manual

# New Battery Technology Design

This is probably the **Longest Working** 700W High Power battery vacuum cleaner you can buy!



**Blade Battery Structure 4.0**

**Old Battery Structure 3.0**

## New Battery Operating Time (4.0 Structure)

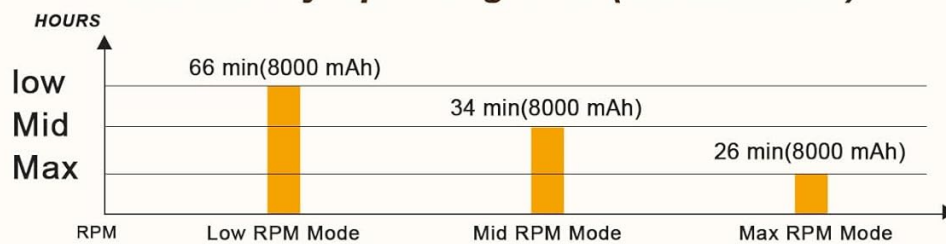


Image: The qimedo V1 Cordless Vacuum Cleaner shown with its floor nozzle, crevice nozzle, and extended crevice nozzle, demonstrating its versatility for different cleaning tasks.

## 3. SETUP

### 3.1 Assembly

1. Connect the main vacuum unit to the extension tube.
2. Attach the desired cleaning head (e.g., floor nozzle, crevice nozzle) to the other end of the extension tube.
3. Ensure all connections click securely into place.

### 3.2 Battery Charging

The 8000mAh battery requires approximately 5 hours for a full charge. You can charge the battery in two ways:

- **Direct Charging:** Plug the charging adapter directly into the battery port on the main unit.

- **Wall Mount Charging:** Install the provided wall mount hook in a convenient location. Place the vacuum onto the wall mount, ensuring the charging adapter is connected to the wall mount's charging port.

## Smart Display and Charging Time

Smart display detects battery health for better battery protection




Charging time  
**5 Hours**

TURN ON **Max Mode**  
PLEASE HOLD WITH  
BOTH HANDS

**Red charging**



Image: The qimedo V1 Cordless Vacuum Cleaner's smart display showing battery status while charging, with the battery pack connected to the charging adapter.

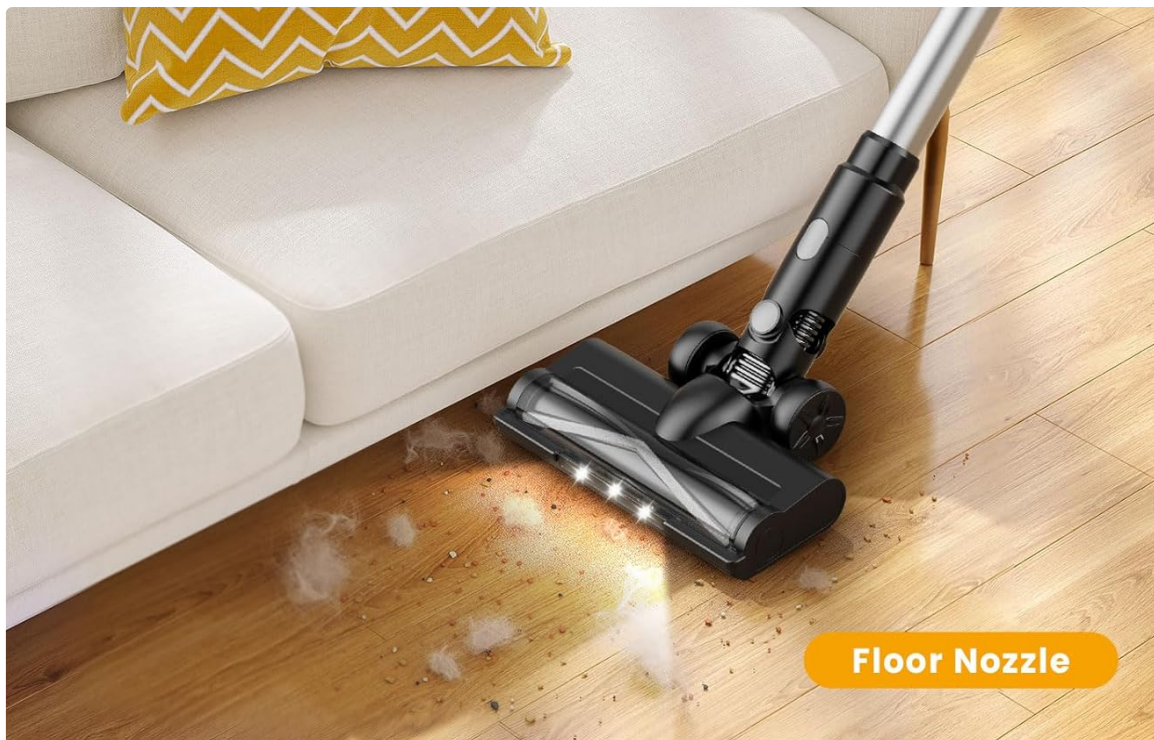

**Floor Nozzle**



**Crevice Nozzle**



**Extended Crevice Nozzle**



**Crevice Nozzle Brush**

Image: The qimedo V1 Cordless Vacuum Cleaner stored on its wall-mounted charging station, with accessories neatly organized.

## 4. OPERATING INSTRUCTIONS

### 4.1 Power On/Off and Suction Modes

To power on the vacuum, press the power button. The smart display will activate, showing the remaining operating time and current suction mode. Press the mode button to cycle through the three suction modes: 30KPA, 50KPA, and 60KPA (MAX mode). To power off, press the power button again.

### 4.2 Smart Display Features

The smart display provides real-time information:

- **Remaining Operating Time:** Displayed in the center.
- **Suction Mode:** Indicated on the right side.

- **Battery Health:** The display detects battery health for optimal protection. A prompt will appear when power is below 3 minutes, indicating a need to recharge.

# Battery Cordless Vacuum Cleaner V1

The **"ONLY"** battery vacuum cleaner on the market with a removable battery

**Best Certified+ Large Battery**

**40%**

**8000mah Removable Battery**

**60000PA Suction Power**

**Smart Display**

**Long and Short 2-in-1**

**LED Head Light**

**Newest Noise Reduction**

**2**

- 2000mah Non-Removable
- 10000KPA Suction Power
- Short Handle
- Loud Noise

**3**

- 4000mah Non-Removable
- 30000KPA Suction Power
- Long and Short 2-in-1
- NO Smart Display
- Loud Noise

Image: The qimedo V1 Cordless Vacuum Cleaner's smart display indicating remaining working time and current suction mode.

## 4.3 Maneuverability and LED Light

The floor nozzle features wheels and can be adjusted 90° up/down and 180° left/right, allowing for easy cleaning under furniture and around obstacles. The integrated LED light on the floor nozzle illuminates dark areas, ensuring thorough cleaning without excessive bending.



Image: The floor nozzle of the qimedo V1 Cordless Vacuum Cleaner with its LED lights activated, illuminating dust on a hard floor surface.

#### 4.4 Versatile Cleaning with Attachments

Utilize the various attachments for different cleaning scenarios:

- **Floor Nozzle:** Ideal for general cleaning of floors and carpets.
- **Crevice Nozzle:** Perfect for narrow gaps, corners, and hard-to-reach areas like car interiors or between sofa cushions.
- **2-in-1 Brush Head:** Combines a brush and a wide nozzle for cleaning upholstery, curtains, and delicate surfaces.



Image: The qimedo V1 Cordless Vacuum Cleaner demonstrating the use of its floor nozzle on a carpet, crevice nozzle for car interiors, and extended crevice nozzle for high-up cleaning.

## 5. MAINTENANCE

## 5.1 Emptying the Dust Cup

The 800 ml dust cup is designed for easy emptying. Simply press the release button to open the bottom flap and dispose of collected debris directly into a trash bin. The large capacity minimizes frequent emptying.



Image: A step-by-step visual guide on how to empty and clean the dust cup and filter of the qimedo V1 Cordless Vacuum Cleaner.

## 5.2 Cleaning the HEPA Filter

The HEPA filter is removable and washable to maintain optimal suction and air quality. To clean:

1. Remove the dust cup from the main unit.
2. Twist and pull out the filter assembly from the dust cup.
3. Rinse the HEPA filter under running water.
4. **IMPORTANT:** Ensure the filter is completely dry before reinstalling it. Reinstalling a wet filter can damage the vacuum.



Image: A hand rinsing the filter component of the qimedo V1 Cordless Vacuum Cleaner under running water in a sink.

## 6. TROUBLESHOOTING

- **E3 Error:** If the vacuum displays an "E3 error" and flashes for 3 seconds, it indicates that hair or debris is stuck. Turn off the vacuum, clear the obstruction, and then turn the switch on again.

- **Reduced Suction:** Check if the dust cup is full or if the HEPA filter is clogged. Clean or empty as necessary.
- **Not for Wet Surfaces:** This is a dry vacuum cleaner. Do not use it on wet surfaces or in wet areas.
- **Carpet Compatibility:** Not recommended for extra-thick (over 0.3 inches) or shaggy carpets.

## 7. SPECIFICATIONS

- **Product Dimensions:** 11.42 x 7.09 x 17.72 inches
- **Item Weight:** 8.78 pounds
- **Item Model Number:** RD-101
- **Batteries:** 1 x 9V battery required (included), 8000mAh capacity
- **Motor:** 700W Brushless Motor, Upgraded 120K/RPM
- **Suction Modes:** 30KPA, 50KPA, 60KPA (MAX)
- **Dust Cup Capacity:** 800 ml
- **Charging Time:** 5 hours
- **Run Time:** Up to 66 minutes (low mode)
- **Form Factor:** Stick
- **Color:** Yellow
- **UPC:** 727458164022

## 8. WARRANTY & SUPPORT

The qimedo V1 Cordless Vacuum Cleaner comes with a **2-year warranty**. For any product, order, or logistics issues, please contact our dedicated 24-hour after-sales service team for assistance. Quality, integrity, and first-class customer service are our top priorities.