

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ZEUSLAP](#) /

› [ZEUSLAP Z18W 2x18.5" Dual Screen Portable Monitor User Manual](#)

ZEUSLAP Z18W

ZEUSLAP Z18W 2x18.5" Dual Screen Portable Monitor User Manual

Model: Z18W

1. INTRODUCTION

Thank you for choosing the ZEUSLAP Z18W Dual Screen Portable Monitor. This device is designed to enhance your productivity and multimedia experience by providing two additional 18.5-inch displays for your compatible devices. This manual provides essential information for setting up, operating, and maintaining your monitor.

2. PRODUCT OVERVIEW

2.1 Key Features

- **Dual 18.5-inch Full HD IPS Displays:** Enjoy vibrant colors and wide viewing angles with 1920x1080 resolution on each screen.
- **120Hz Refresh Rate:** Experience smooth visuals, ideal for gaming and fast-paced multimedia.
- **Type-C Connectivity:** Single cable solution for power and video transmission with compatible devices.
- **100% sRGB Color Gamut:** Ensures accurate and rich color reproduction.
- **300 cd/m² Brightness:** Provides clear visibility in various lighting conditions.
- **Touch Screen Functionality:** Interact directly with the display for intuitive control.
- **Wide Compatibility:** Connects to Laptops, Desktops, Gaming Consoles, and Smartphones.


2.2 Package Contents

Please check the package for the following items:

- ZEUSLAP Z18W Dual Screen Portable Monitor
- USB-C to USB-C Cable (for video and power)
- USB-A to USB-C Power Cable (for additional power if needed)
- User Manual



This image shows the ZEUSLAP Z18W dual portable monitor set up next to a laptop, demonstrating its extended display capabilities for enhanced productivity.

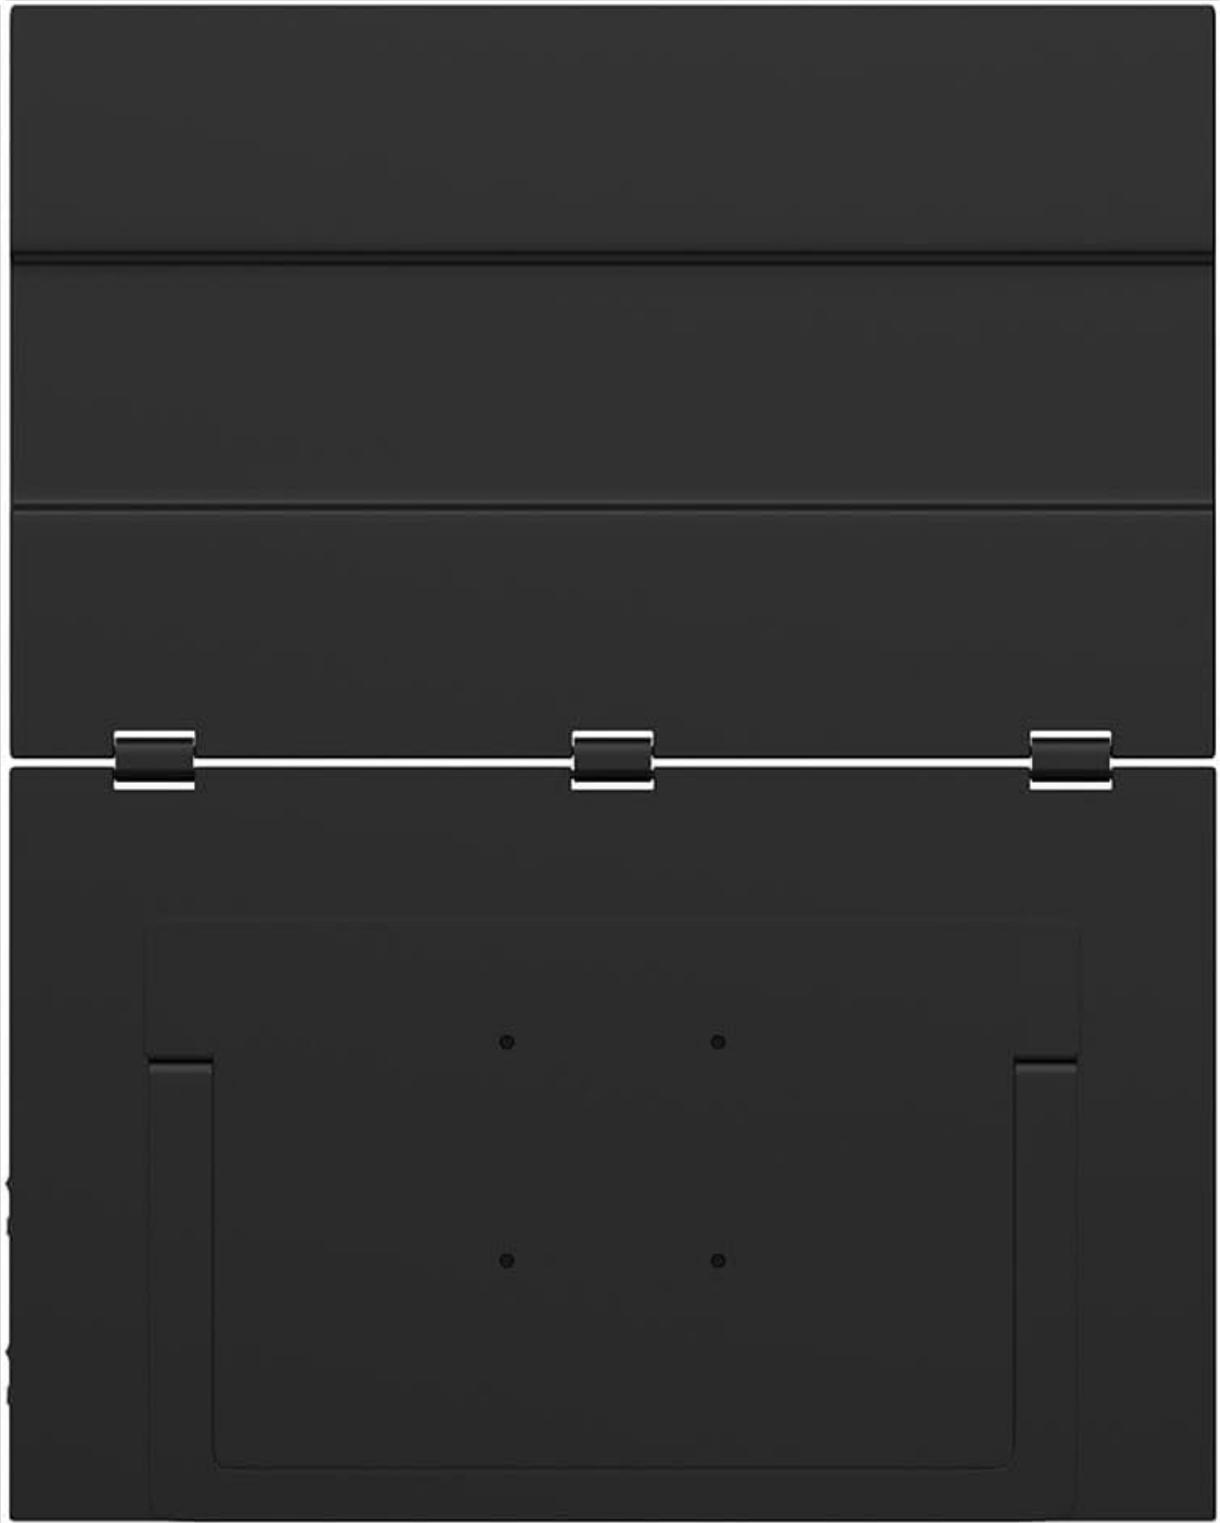

The back view of the ZEUSLAP Z18W monitor highlights its robust hinge design and integrated stand, allowing for flexible positioning and stability.

3. SETUP

3.1 Connecting to a Device

The ZEUSLAP Z18W monitor supports various connection methods. Ensure your device has the necessary ports.

1. **USB-C (Full-Featured):** If your laptop, smartphone, or gaming console has a full-featured USB-C port (supporting DisplayPort Alternate Mode and power delivery), connect the monitor using the provided USB-C to USB-C cable. This single cable can transmit video, audio, and power to the monitor.
2. **USB-C (Power Only) + HDMI (Video):** If your device's USB-C port does not support video output, or if you are connecting

to a device with an HDMI port, you will need two cables:

- Connect an HDMI cable (not included) from your device to the monitor's HDMI input.
- Connect the provided USB-A to USB-C power cable from a USB power source (e.g., laptop USB port, wall adapter) to the monitor's USB-C power input.

3.2 Powering On/Off

- **Power On:** Once connected to a compatible device and receiving power, the monitor should automatically power on. If not, press the Power button located on the side of the monitor.
- **Power Off:** Press and hold the Power button for a few seconds until the display turns off. Disconnect the cables when not in use.

4. OPERATING INSTRUCTIONS

4.1 On-Screen Display (OSD) Menu

The OSD menu allows you to adjust various display settings. The monitor typically features a joystick or a set of buttons for navigation.

- **Accessing the OSD:** Press the OSD button (or push the joystick) to open the menu.
- **Navigation:** Use the joystick or directional buttons to move through menu options.
- **Selection:** Press the OSD button (or push the joystick in) to select an option.
- **Exit:** Navigate to the 'Exit' option or press the 'Back' button to close the OSD menu.

Common OSD settings include Brightness, Contrast, Color Temperature, Input Source, Aspect Ratio, and Volume.

4.2 Display Modes

When connected to a computer, you can configure the display mode through your operating system's display settings:

- **Extend Mode:** Each monitor displays a separate desktop, allowing for more screen space and multitasking.
- **Duplicate Mode:** All monitors display the same content, useful for presentations or sharing your screen.

4.3 Touch Screen Functionality

The ZEUSLAP Z18W features a touch screen. For touch functionality to work, ensure your device supports touch input over the connected interface (typically USB-C) and that the necessary drivers are installed (usually automatically by the operating system).

- **Single Touch:** Tap to select or open items.
- **Multi-Touch Gestures:** Use gestures like pinch-to-zoom, two-finger scroll, etc., as supported by your operating system.

5. MAINTENANCE

5.1 Cleaning the Monitor

- Always power off the monitor and disconnect all cables before cleaning.
- Use a soft, lint-free cloth lightly dampened with water or a non-abrasive screen cleaner.
- Do not spray cleaner directly onto the screen.
- Avoid using alcohol, ammonia, or abrasive cleaners, as they can damage the screen surface.

5.2 Storage

- Store the monitor in a cool, dry place away from direct sunlight and extreme temperatures.
- Use the original packaging or a protective case to prevent damage during transport or storage.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
No display / "No Signal" message	<ul style="list-style-type: none">Incorrect input source selected.Cables not properly connected.Insufficient power supply.Device not outputting video.	<ul style="list-style-type: none">Check OSD menu for correct input source.Ensure all cables (USB-C, HDMI, power) are securely connected.Use the provided power cable or a stronger power adapter if needed.Verify your device's display settings.
Monitor powers on but no image	<ul style="list-style-type: none">Video cable issue.Device display settings.	<ul style="list-style-type: none">Try a different video cable.Ensure your device is set to extend or duplicate its display.
Touch screen not responding	<ul style="list-style-type: none">Incorrect connection for touch data.Missing drivers.Operating system limitations.	<ul style="list-style-type: none">Ensure a full-featured USB-C connection is used, or a separate USB cable for touch data if applicable.Check your device's settings for touch screen enablement.Restart your device.
Flickering or distorted image	<ul style="list-style-type: none">Faulty cable.Interference.Graphics driver issue.	<ul style="list-style-type: none">Replace the video cable.Ensure cables are not near strong electromagnetic sources.Update your device's graphics drivers.

7. SPECIFICATIONS

Feature	Detail
Model Name	Z18W
Screen Size	2 x 18.5 inches
Resolution	1920 x 1080 (Full HD)
Refresh Rate	120Hz
Panel Type	IPS
Color Gamut	100% sRGB
Brightness	300 cd/m ²
Connectivity	USB-C, USB
Special Features	Dual Screen, High Refresh Rate, Type-C Connection, Touch Screen
Compatible Devices	Laptop, Desktop, Gaming Console, Smartphone

8. WARRANTY AND SUPPORT

The ZEUSLAP Z18W Dual Screen Portable Monitor comes with a standard manufacturer's warranty. Please refer to the warranty

card included in your package for specific terms and conditions, including the warranty period and coverage details.

For technical support, troubleshooting assistance, or warranty claims, please contact the retailer where you purchased the product or visit the official ZEUSLAP website for customer service contact information.