

BOXPOT BPR2S

BOXPOT BPR2S Bluetooth Air Mouse Remote Control User Manual

1. INTRODUCTION

Thank you for choosing the BOXPOT BPR2S Bluetooth Air Mouse Remote Control. This device combines Bluetooth connectivity, infrared (IR) learning, air mouse functionality, and voice control to provide a convenient and efficient way to interact with your compatible smart devices. This manual will guide you through the setup, operation, and maintenance of your new remote control.

The BOXPOT BPR2S is designed for ease of use, featuring a comfortable grip and intuitive button layout. It is suitable for controlling various devices such as Android TVs, TV sticks, set-top boxes, and computers.

2. PACKAGE CONTENTS

Please check the package for the following items:

- BOXPOT BPR2S Bluetooth Air Mouse Remote Control
- USB Receiver (if applicable for 2.4G models, though this model is primarily Bluetooth)
- User Manual (digital version available via QR code on the device)

Note: 2x AAA batteries are required and are not included in the package. Please prepare them separately.

3. PRODUCT OVERVIEW

The BOXPOT BPR2S remote control integrates both Bluetooth and infrared capabilities, offering flexible control. Its ergonomic design ensures comfortable handling.

BPR2S リモコン



赤外線リモコン



BTリモコン



The BOXPUR BPR2S remote control supports both Bluetooth and infrared (IR) connectivity, offering versatile control options for your devices.

Button Layout and Functions

Familiarize yourself with the remote's button layout for optimal use:



This diagram illustrates the layout and function of each button on the BOXPUP BPR2S remote control, including power, volume, navigation, and special functions.

- **Power Button:** Turns devices on/off.
- **Mute Button:** Mutes/unmutes audio.
- **Microphone:** For voice control input.
- **Indicator Light:** Shows remote status.
- **4 IR Learning Keys (colored buttons):** Customizable buttons for IR learning.
- **Menu Button:** Accesses device menu.
- **Voice Button:** Activates voice command function.
- **Home Button:** Returns to the home screen.
- **Navigation Pad (Up, Down, Left, Right, OK):** For directional control and selection.
- **Delete/Back Button:** Deletes input or goes back.
- **Mouse Button:** Toggles air mouse function on/off.
- **Back Button:** Returns to the previous screen.
- **Volume +/- Buttons:** Adjusts volume levels.

4. SETUP

4.1. Battery Installation

1. Open the battery compartment cover on the back of the remote control.

2. Insert two AAA batteries, ensuring correct polarity (+/-).
3. Close the battery compartment cover securely.

4.2. Bluetooth Pairing

To pair the remote control with your device via Bluetooth:

1. Ensure your device's Bluetooth is enabled.
2. Press and hold the **OK** button and the **Home** button simultaneously on the remote control until the indicator light starts flashing rapidly. This indicates pairing mode.
3. On your device (e.g., Android TV, TV Stick), go to the Bluetooth settings and search for new devices.
4. Select "BPR2S" from the list of available devices to complete the pairing process. The indicator light on the remote will stop flashing and turn off once successfully paired.

5. OPERATING INSTRUCTIONS

5.1. Basic Remote Functions

Use the navigation pad (Up, Down, Left, Right, OK) to move through menus and select items. The Power, Mute, Volume, Menu, Home, and Back buttons function as labeled for standard control.


5.2. Air Mouse Function

The BOXPOT BPR2S features a 6-axis gyroscope for precise air mouse control.

1. Press the **Mouse** button to activate the air mouse function. A cursor will appear on your screen.
2. Move the remote control in the air to control the cursor's movement.
3. Press the **OK** button to click or select an item.
4. Press the **Mouse** button again to deactivate the air mouse function and return to traditional button navigation.

マウスのような快適クリック感&精密操作

高品質素材で握りやすく、長時間使用でも疲れにくい
クリック音が心地よく、正確な操作が可能

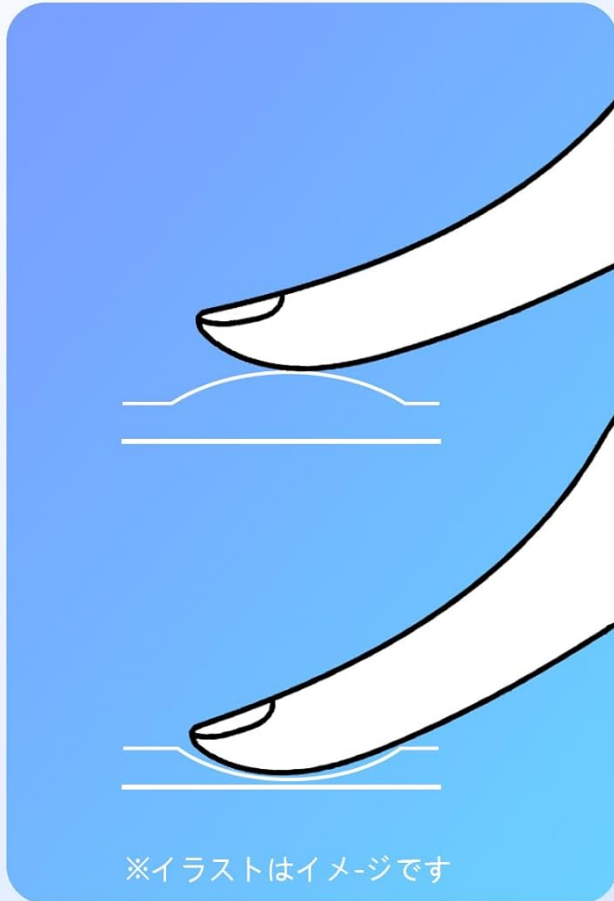

The remote features a comfortable button design with responsive click feedback, ensuring ease of use during extended periods.

5.3. Voice Control

The remote supports voice commands for compatible devices.

1. Press and hold the **Voice** button.
2. Speak your command clearly into the microphone located at the top of the remote.
3. Release the **Voice** button when you are finished speaking.

5.4. IR Learning Function

The BOXPUR BPR2S allows you to learn infrared signals from your existing remote controls onto its four dedicated IR learning keys (the colored buttons at the top).

1. Place the BOXPUR BPR2S remote and your original IR remote control head-to-head, approximately 1-3 cm apart.
2. Press and hold the **Power** button on the BOXPUR BPR2S for about 3 seconds until the indicator light starts flashing slowly.

3. Press the button on the BOXPOT BPR2S (one of the four colored keys) that you wish to program. The indicator light will flash rapidly.
4. Press the corresponding button on your original IR remote control. The indicator light on the BPR2S will flash three times and then stay solid, indicating successful learning.
5. Repeat steps 3 and 4 for any other buttons you wish to program.
6. Once finished, press the **Power** button on the BOXPOT BPR2S again to exit IR learning mode. The indicator light will turn off.

Watch this video for a quick overview of the BOXPOT BPR2S remote control, showcasing its Bluetooth connectivity, 6-axis gyroscope for air mouse functionality, and voice control features.

6. COMPATIBILITY

The BOXPOT BPR2S remote control offers wide compatibility with various devices:

6.1. Compatible Devices

- Most Android TV Boxes
- Android TV Sticks
- Smart Projectors
- Set-top Boxes
- PCs (may require firmware upgrade on the PC side for full functionality)
- AOSP (Android Open Source Project) devices
- Some ATV (Android TV) devices
- Smart TVs (with Bluetooth support)

6.2. Incompatible Devices

Please note that the BOXPOT BPR2S is **not compatible** with the following devices:

- Fire Stick
- DVB Box
- ROKU Box
- MAG Box
- Apple Box
- Some LG and Samsung brand TVs

非対応デバイス

ファイアースティック、DVBボックス、ロクボックス、マグボックス、アップルボックス、および一部のLGサムスンテレビ



対応デバイス

Android TV ボックス、Android TV スティック、PC (ハードウェアの交換が必要)
およびその他のAndroidデバイス



This image outlines the device compatibility for the BOXPUP BPR2S remote, including Android TV boxes, Android TV sticks, and PCs, while also listing incompatible devices such as Fire Stick and certain LG/Samsung TVs.

7. SPECIFICATIONS

Feature	Specification
Brand	BOXPUT
Model	BPR2S
Color	Black
Connectivity	Bluetooth, Infrared (IR)
Controller Type	Button Control
Number of Buttons	10

Max Range	10 meters
Battery Type	Alkaline (AAA x 2, not included)
Dimensions (L x W x H)	143mm x 45mm x 30mm
Special Features	Ergonomic, Air Mouse (6-axis Gyroscope), Voice Control, IR Learning

8. TROUBLESHOOTING

If you encounter issues with your BOXPOT BPR2S remote control, please refer to the following common solutions:

- **Remote not responding:**
 - Check if the batteries are correctly inserted and have sufficient charge. Replace if necessary.
 - Ensure the remote is within the operating range (up to 10 meters) of your device.
 - Re-pair the remote via Bluetooth (refer to Section 4.2).
- **Air mouse cursor is erratic or not moving:**
 - Calibrate the gyroscope by placing the remote on a flat surface for a few seconds.
 - Ensure there are no obstructions between the remote and the device.
- **Voice control not working:**
 - Confirm that your device supports voice input and that the microphone on the remote is not obstructed.
 - Check your device's settings for microphone permissions for the remote.
- **IR learning not successful:**
 - Ensure the original remote's battery is not low.
 - Make sure the two remotes are placed very close (1-3 cm) and directly facing each other during the learning process.
 - Repeat the IR learning steps carefully (refer to Section 5.4).
- **Remote not compatible with my device:**
 - Refer to the compatibility list in Section 6. If your device is listed as incompatible, the remote will not function with it.
 - For PC use, ensure your PC's firmware is updated.

9. MAINTENANCE

- Keep the remote control dry. Avoid exposure to moisture or liquids.
- Clean the remote with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Avoid dropping or subjecting the remote to strong impacts.
- If the remote will not be used for an extended period, remove the batteries to prevent leakage.

10. WARRANTY AND SUPPORT

BOXPUT products are designed for reliability and performance. For any questions, technical support, or warranty inquiries, please contact BOXPOT customer service through your purchase platform. Your satisfaction is our priority.

