

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ZMISHIBO](#) /

› [ZMISHIBO BJ60 60-Inch Smart RGB Ceiling Fan User Manual](#)

## ZMISHIBO BJ60

# ZMISHIBO BJ60 60-Inch Smart RGB Ceiling Fan User Manual

Model: BJ60 | Brand: ZMISHIBO

[Safety Information](#) [Package Contents](#) [Setup & Installation](#) [Operating](#)  
[Instructions](#) [Specifications](#) [Maintenance](#) [Troubleshooting](#) [Warranty & Support](#)

## INTRODUCTION

---

This manual provides detailed instructions for the installation, operation, and maintenance of your ZMISHIBO BJ60 60-inch Smart RGB Ceiling Fan. This modern flush mount ceiling fan features integrated RGB lighting, a dimmable 20W LED light, and a quiet 6-speed DC motor. It offers versatile control options including voice control (Alexa, Google Assistant), a dedicated app, and a remote control. Please read this manual thoroughly before installation and use to ensure safe and efficient operation.



Figure 1: ZMISHIBO BJ60 60-inch Smart RGB Ceiling Fan

## SAFETY INFORMATION

---

Please observe the following safety precautions to reduce the risk of fire, electric shock, or personal injury:

- Read all instructions carefully before beginning installation.
- Ensure the power is turned off at the circuit breaker before installation or servicing.
- All wiring must be in accordance with national and local electrical codes. If you are unfamiliar with wiring, consult a qualified electrician.
- The fan must be mounted to a structurally sound ceiling joist or outlet box capable of supporting the fan's weight.
- Do not bend the blade holders during installation, balancing, or cleaning.
- Keep hands, tools, and other objects clear of the fan blades when the fan is operating.
- Do not operate the fan if any part is damaged.

## PACKAGE CONTENTS

---

Verify that all components are present and undamaged before proceeding with installation. If any parts are missing or damaged, contact ZMISHIBO customer support.

## Product Details



High-Quality  
Plywood Blades



20W Bright  
LED Light



Powerful DC Motor

Figure 2: ZMISHIBO BJ60 Ceiling Fan Components

- Fan Motor Host
- Fan Blades (5x)
- Blade Arms (5x)
- Lampshade
- Mounting Bracket
- Receiver
- Remote Controller (2 AAA batteries included)
- Hardware Pack (screws, wire nuts, safety rope)
- Instruction Manual

## SETUP & INSTALLATION

---

The ZMISHIBO BJ60 ceiling fan is designed for easy installation, typically taking around 30 minutes. Follow these steps carefully. It is recommended to watch the installation video for visual guidance.

### Installation Video Guide

Video 1: ZMISHIBO Smart RGB Ceiling Fan Installation Guide. This video demonstrates the step-by-step process for assembling and installing the ceiling fan, including wiring connections.

### Step-by-Step Installation

1. **Prepare Blades:** Choose the desired blade color (black or oak grey) to face downward. Attach each fan blade to a blade arm using the provided screws. Ensure they are securely fastened.
2. **Disassemble Canopy:** Remove the mounting bracket from the canopy by unscrewing it. Then, remove the screws from the host part of the motor to separate the canopy.
3. **Assemble Fan Body:** Route the host wires through the top center of the canopy. Install the canopy onto the host motor with screws. Attach the safety rope with a screw.
4. **Attach Blade Arms:** Remove the 10 arm screws from the motor host. Attach the assembled blade arms to the motor using these screws.
5. **Install LED Light Board:** Connect the LED board wire connector. Install the LED lamp board onto the main body and tighten the screws.
6. **Connect Controller Wires:** Connect the wires between the controller and the motor.

7. **Mounting Bracket Installation:** Install the mounting bracket to the ceiling outlet box using appropriate screws. Ensure it is securely fastened to a ceiling joist or a box rated for fan support.
8. **Electrical Connections:** Hang the fan motor assembly onto the safety hook of the mounting bracket. Connect the neutral wire (white), live wire (black), and ground wire (green/yellow) from the fan to the corresponding wires from the ceiling outlet box using wire nuts. Connect the RGB lamp line with the receiver.
9. **Secure Fan to Ceiling:** Carefully lift the fan assembly and align it with the mounting bracket. Secure the canopy to the mounting bracket with screws.
10. **Install Lampshade:** Screw the lampshade into place by turning it upward until secure.



Figure 3: Easy Installation Process

## OPERATING INSTRUCTIONS

---

Your ZMISHIBO BJ60 Smart RGB Ceiling Fan offers multiple control methods for convenience and customization.

### Control Methods

- **Voice Control:** Compatible with Alexa and Google Assistant. Simply use voice commands to turn the fan and light on/off.
- **App Control:** Download the dedicated app (Tuya Smart App or Smart Life APP). Ensure Bluetooth and Wi-Fi are enabled on your device for app operation. The app allows comprehensive control over fan speeds, light settings, RGB colors, and scheduling.
- **Remote Control:** Use the included handheld remote for quick adjustments. The remote allows control of light ON/OFF, 6 fan speeds, dimming, RGB ON/OFF, color temperature adjustment, 2H timing, and RGB effect switching.

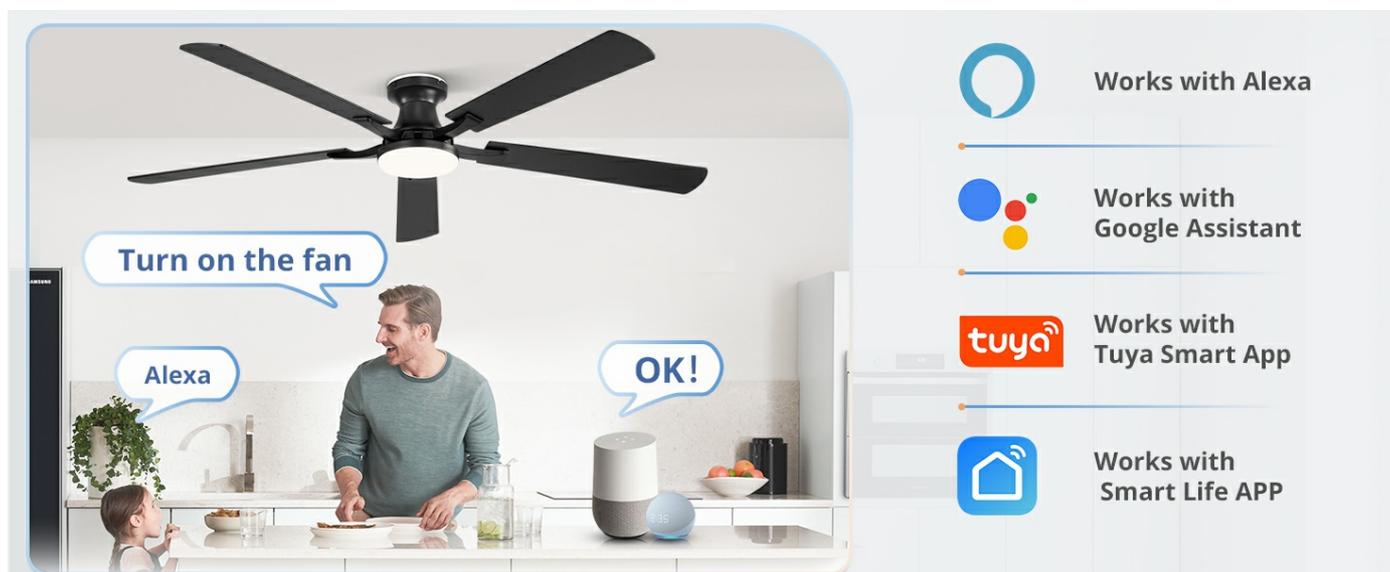


Figure 4: Voice and App Control Options



Figure 5: Remote and App Control Interface

## Lighting Features

- **Dimmable LED Light:** The 20W LED light offers stepless brightness adjustment from 10% to 100%.
- **Color Temperature Adjustment:** Seamlessly switch between 3000K (warm white) and 6000K (cool white) to suit various activities like daily lighting, reading, or entertainment.
- **RGB Ambient Lighting:** Enjoy rhythmic RGB ambient lighting with over 16 million color variations to create different atmospheres.
- **Light Memory Function:** The fan automatically restores the last light settings when turned on again.



Figure 6: Dimmable and Color Temperature Features

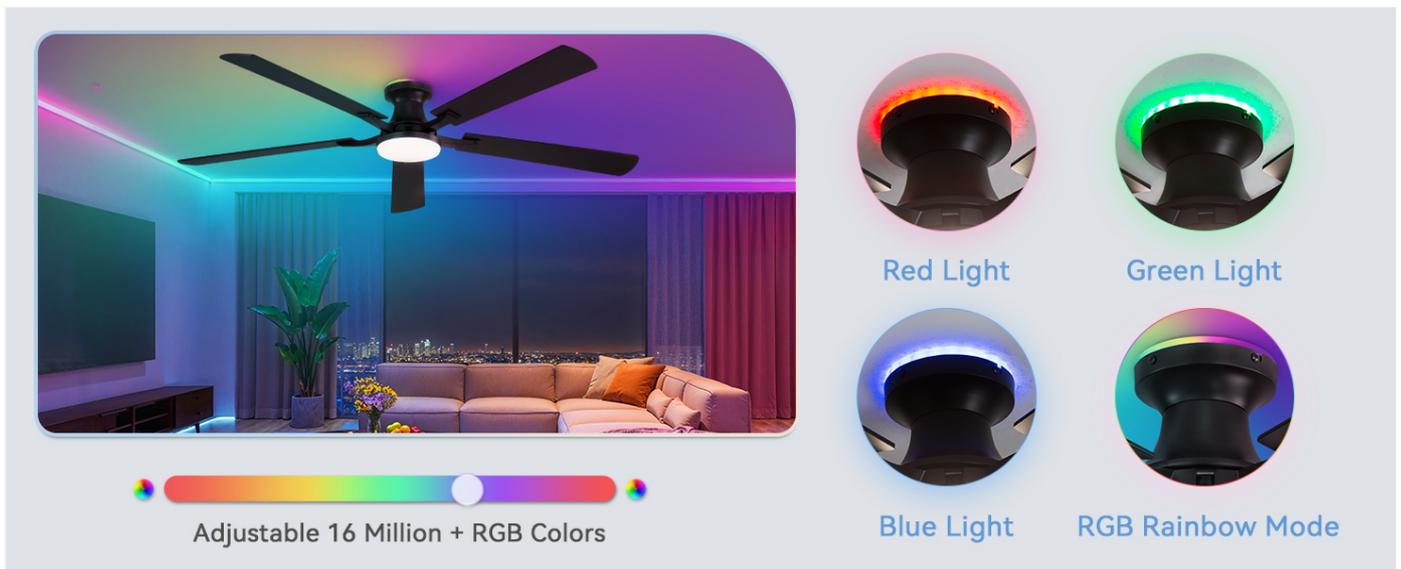


Figure 7: RGB Lighting Modes

## Fan Functions

- **6-Speed DC Motor:** The high-performance, energy-efficient DC motor provides 6 wind speeds, operating quietly below 30 decibels.
- **Reversible Motor:** The fan features a reversible motor for year-round use. In summer, it runs forward to create a cooling breeze. In winter, it reverses to circulate warm air evenly throughout the room.
- **2H Timer:** Set a 2-hour timer for convenient operation, especially useful for sleeping.

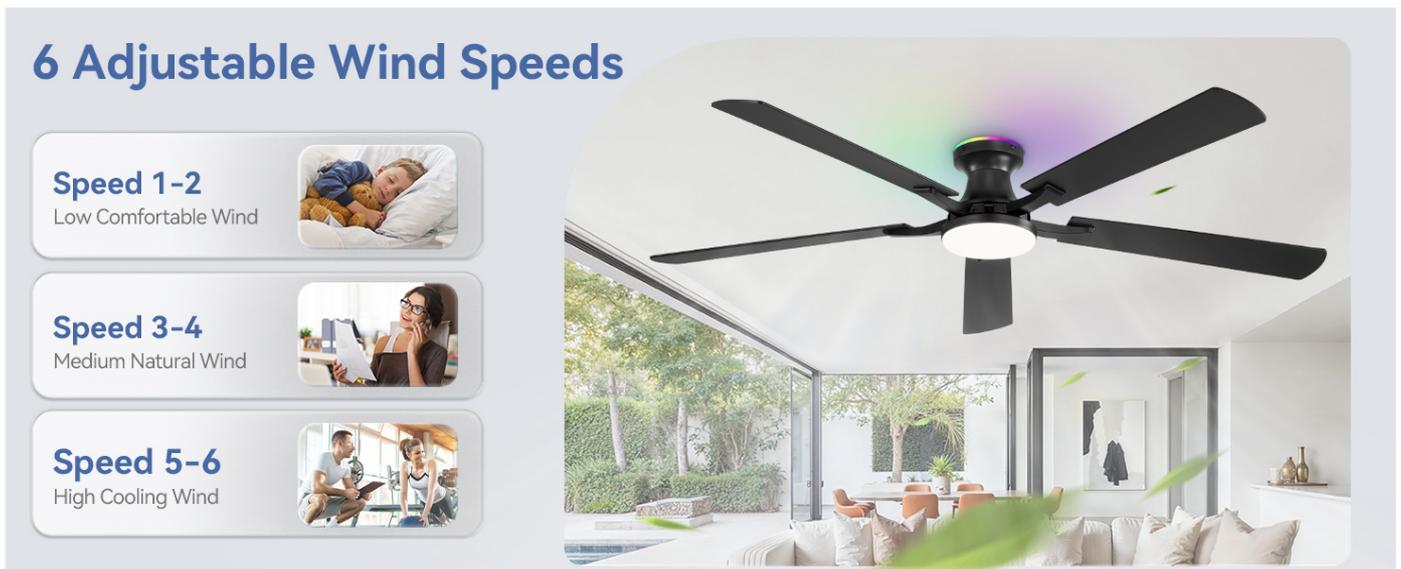


Figure 8: Adjustable Wind Speeds



Figure 9: Reversible Air Circulation for Seasonal Use

## Product Display Video

Video 2: ZMISHIBO Smart RGB Ceiling Fan with Light Display. This video showcases the various lighting modes, fan speeds, and overall aesthetic of the ceiling fan in operation.

## SPECIFICATIONS

Feature	Detail
Brand	ZMISHIBO
Model Name	BJ60
Size	60 Inch
Color	Black
Electric Fan Design	Ceiling Fan
Power Source	DC Motor
Style	Modern
Product Dimensions	21"D x 13"W x 7.5"H
Room Type	Bedroom, Dining Room, Kitchen, Living Room, Playroom
Special Features	Adjustable Color Temperature, App/Remote Control, Color Changing, Dimmable 20W LED Light, RGB-16 Million+ Colors
Recommended Uses	Air Circulation, Cooling
Noise Level	30 Decibels
Wattage	20 watts
Finish Type	Matte
Number of Blades	5

Included Components	Cord, Light Kit, Remote
Indoor/Outdoor Usage	Indoor
Control Method	App, Remote
Number of Power Levels	6
Motor Type	DC
Smart Home Compatibility	Smart Home Compatible
Installation Type	DIY
Item Weight	12.07 pounds
Batteries	2 AAA batteries required (included)
Mounting Type	Flush Mount

## MAINTENANCE

---

Regular maintenance ensures the longevity and optimal performance of your ceiling fan.

- **Cleaning:** To clean the fan, wipe the blades and motor housing with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these can damage the finish.
- **Dusting:** Periodically dust the fan blades and light kit to prevent dust buildup, which can affect performance and light output.
- **Tighten Screws:** Check all screws and connections annually to ensure they are secure. Loose screws can cause noise or wobble.
- **Light Source:** The LED light source is integrated and designed for long life. If the light fails, contact customer support for assistance.

## TROUBLESHOOTING

---

If you encounter issues with your ZMISHIBO BJ60 ceiling fan, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Fan does not start	No power supply; Loose wiring; Remote control battery low/dead	Check circuit breaker; Verify all wire connections are secure; Replace remote control batteries.
Light does not work	Loose wiring; LED board issue; Remote control battery low/dead	Check light wiring connections; If LED board is faulty, contact support; Replace remote control batteries.
Fan wobbles	Loose blades or mounting hardware; Unbalanced blades	Ensure all blade screws and mounting bracket screws are tight; Use a balancing kit (not included) if necessary.
Remote control not working	Battery low/dead; Remote not paired; Obstruction between remote and receiver	Replace batteries; Refer to pairing instructions in the full manual (if applicable); Ensure clear line of sight.

App control issues	Bluetooth/Wi-Fi off; Incorrect pairing; App outdated	Ensure Bluetooth and Wi-Fi are active; Follow app pairing instructions; Update the app to the latest version.
--------------------	------------------------------------------------------	---------------------------------------------------------------------------------------------------------------

If the problem persists after attempting these solutions, please contact ZMISHIBO customer support.

## WARRANTY & SUPPORT

---

ZMISHIBO stands behind the quality of its products.

- **Motor Warranty:** The ZMISHIBO BJ60 Ceiling Fan motor is covered by a 5-year warranty.
- **Parts Warranty:** All other parts are covered by a 2-year warranty.

For any questions, technical assistance, or warranty claims, please contact ZMISHIBO customer support. You can also visit the official ZMISHIBO store for more information and support resources:

[Visit the ZMISHIBO Store](#)

