memzuoix A15G1B

memzuoix 15-inch Portable Monitor (Model A15G1B) User Manual

Model: A15G1B

1. Introduction

This manual provides essential information for the proper setup, operation, and maintenance of your memzuoix 15-inch Portable Monitor (Model A15G1B). Please read these instructions thoroughly before using the product to ensure optimal performance and longevity.

2. What's in the Box

Verify that all items listed below are present in your package:

- 1 x ABS Material Display (memzuoix 15-inch Portable Monitor)
- 1 x Foldable Leather Case
- 1 x Mini HDMI Cable
- 1 x Power Adapter
- 1 x USB-C Cable

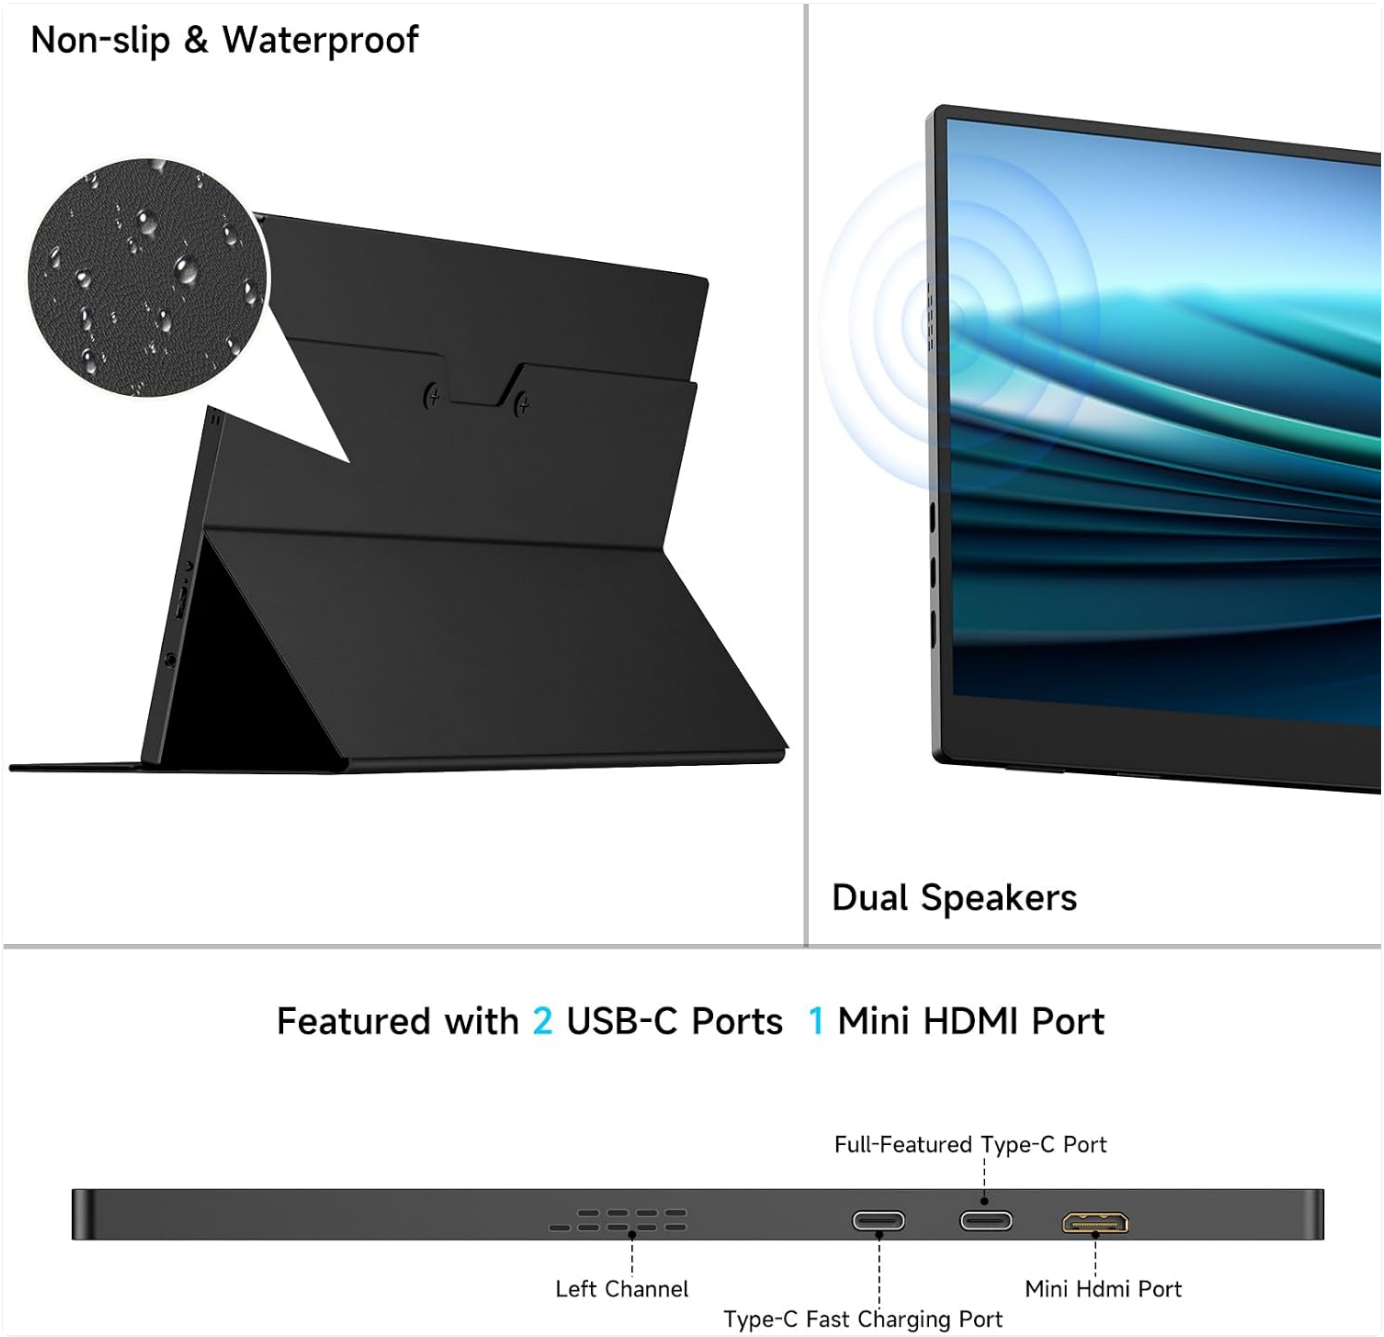


Image: The memzuoix portable monitor, its foldable leather case, and included cables (Mini HDMI, USB-C, and power adapter).

3. Product Overview

3.1 Monitor Components

The memzuoix portable monitor features a slim design with essential ports and controls for versatile use.



Image: A detailed side view of the monitor highlighting the On/Off/Back Button, Dia-Wheel Menu, 3.5mm Headphone Hole, Power Port, Full-featured Type-C Port, and Mini HDMI Port.

3.2 Ports and Controls

- **On/Off/Back Button:** Powers the monitor on or off. Also functions as a 'Back' button within the OSD menu.
- **Dia-Wheel Menu:** Navigates the On-Screen Display (OSD) menu for settings adjustments. Press to select, roll to adjust.
- **3.5mm Headphone Hole:** For connecting external audio devices like headphones or speakers.
- **Power Port:** Connects to the included power adapter for external power supply.
- **Full-featured Type-C Port (x2):** Supports power, video, and data transmission via a single USB-C cable. Compatible with devices supporting DP Alt-Mode.
- **Mini HDMI Port:** Connects to devices via HDMI for video and audio input.

4. Setup

Follow these steps to set up your portable monitor.

4.1 Using the Foldable Leather Case as a Stand

1. Place the monitor on a flat surface.
2. Fold the magnetic leather case to form a triangular stand.
3. Adjust the monitor into the grooves of the case for your desired viewing angle (15°, 30°, or 60°).



Image: The foldable leather case configured as a stand, demonstrating adjustable viewing angles.

4.2 Connecting to Devices

The monitor supports various devices including laptops, smartphones, gaming consoles (PS5, Xbox, Switch), and PCs.

- **USB-C Connection (Single Cable):** For devices with a full-featured USB-C port (supporting DP Alt-Mode), connect the monitor using the provided USB-C cable. This single cable can transmit power, video, and audio.
- **HDMI Connection:** For devices with an HDMI output, connect the monitor using the provided Mini HDMI to HDMI cable. An additional USB-C to USB-A cable or power adapter may be required for power.
- **Power Supply:** If your device cannot provide sufficient power via USB-C, or when using HDMI, connect the monitor to the included power adapter via one of the USB-C ports.

Your browser does not support the video tag.

Video: Demonstrates the unboxing, setting up the monitor stand, and connecting the monitor to a laptop via USB-C for power and display.



Image: The monitor connected to a laptop, a PlayStation 5, and a Nintendo Switch, showcasing its wide compatibility.

4.3 VESA Mounting

The monitor features 75x75mm VESA mounting holes on the back, allowing for wall or arm installation. Ensure you use VESA-compatible mounting hardware (not included).



Image: The back of the monitor showing the VESA mounting pattern for alternative installation options.

5. Operating Instructions

5.1 Power On/Off

Press and hold the **On/Off/Back Button** for a few seconds to power the monitor on or off.

5.2 On-Screen Display (OSD) Menu

Use the **Dia-Wheel Menu** to access and navigate the OSD menu. Press the wheel to enter the menu or select an option. Roll the wheel to move between options or adjust values.
Common OSD settings include:

- **Brightness/Contrast:** Adjust display luminance and contrast levels.
- **Color Settings:** Modify color temperature, hue, and saturation.
- **HDR Mode:** Enable or disable High Dynamic Range for enhanced visual detail.
- **Input Source:** Manually select between USB-C and HDMI inputs.
- **Audio:** Adjust volume for built-in speakers or connected headphones.

5.3 Display Modes

When connected to a computer, the monitor supports various display modes:

- **Extend Mode:** Expands your desktop across both screens, providing more workspace.
- **Duplicate Mode:** Mirrors your primary display, showing the same content on both screens.
- **Second Screen Only Mode:** Displays content only on the portable monitor, turning off the primary display.
- **Portrait Mode:** The monitor can be rotated for vertical display, ideal for documents or coding. Adjust settings in your operating system's display preferences.



Image: Visual representation of Extend, Duplicate, and Second Screen Only display modes.

5.4 Audio Output

The monitor includes dual built-in speakers. For private listening or higher quality audio, connect headphones or external speakers to the 3.5mm headphone jack.



Image: Illustration highlighting the monitor's built-in dual speakers.

6. Maintenance

Proper care ensures the longevity of your monitor.

- **Cleaning the Screen:** Use a soft, lint-free cloth slightly dampened with water or a non-abrasive screen cleaner. Avoid harsh chemicals.
- **Cleaning the Body:** Wipe the monitor's body with a soft, dry cloth.
- **Storage:** When not in use, store the monitor in its protective foldable case to prevent scratches and damage. Avoid extreme temperatures and humidity.
- **Handling:** Always handle the monitor by its edges. Avoid applying pressure directly to the screen.

7. Troubleshooting

If you encounter issues, refer to the following common solutions:

Problem	Possible Cause	Solution
No Signal / Black Screen	Incorrect input source selected; Loose cable connection; Insufficient power; Device not outputting signal.	1. Ensure cables are securely connected. 2. Verify the input source in the OSD menu. 3. Connect the monitor to external power using the adapter. 4. Check your device's display settings.
No Power	Power cable not connected; Faulty power adapter/cable.	1. Ensure the power adapter is securely connected to both the monitor and a working power outlet. 2. Try a different USB-C cable or power source if available.
Flickering / Unstable Display	Cable issue; Insufficient power; Graphics driver issue.	1. Replace the video cable. 2. Ensure adequate power supply. 3. Update your device's graphics drivers.
No Sound / Low Volume	Volume too low; Incorrect audio output selected on device; Faulty headphones/speakers.	1. Adjust monitor volume via OSD. 2. Check your device's audio output settings to ensure the monitor is selected. 3. Test with different headphones/speakers.
Poor Picture Quality (Mac/MacBook)	HDR setting enabled on Mac.	For Mac/MacBook users, ensure HDR is OFF in System Settings > Displays > High Dynamic Range.

8. Specifications

Detailed technical specifications for the memzuoix 15-inch Portable Monitor.

Feature	Specification
Brand	memzuoix
Model Number	A15G1B
Screen Size	15 Inches
Resolution	FHD 1080p (1920 x 1080 Pixels)
Aspect Ratio	16:9
Display Type	LCD (IPS Technology)
Screen Surface	Matte, Anti-Glare
Refresh Rate	60 Hz
Response Time	3 Milliseconds
Contrast Ratio	1000:1
Brightness	220 Candela
Viewing Angle	170 Degrees
Color Gamut	100% sRGB
Connectivity	2 x USB 3.0 Type C (Full-featured), 1 x Mini HDMI, 1 x 3.5mm Audio
Power Consumption	10 Watts
Item Dimensions (D x W x H)	0.35" x 13.62" x 8.66"
Item Weight	1.4 Pounds
Mounting Type	Desk Mount / Wall Mount (75x75mm VESA)
Additional Features	HDR, Low Blue Light, Built-In Speakers, Frameless

9. Warranty and Support

9.1 Warranty Information

This memzuoix portable monitor comes with a **1-Year Manufacturer Warranty** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or external factors.

9.2 Customer Support

For technical assistance, warranty claims, or any questions regarding your product, please contact memzuoix customer support through the retailer's platform or the official memzuoix website. Please have your model number (A15G1B) and purchase information ready when contacting support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question