

JolyWell JW-BBM005

JolyWell 2K Video Baby Monitor (Model JW-BBM005) Instruction Manual

Comprehensive Guide for Setup, Operation, and Maintenance

1. INTRODUCTION

Thank you for choosing the JolyWell 2K Video Baby Monitor, Model JW-BBM005. This manual provides essential information for the safe and efficient use of your baby monitor. Please read it thoroughly before installation and operation, and retain it for future reference.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact customer support.

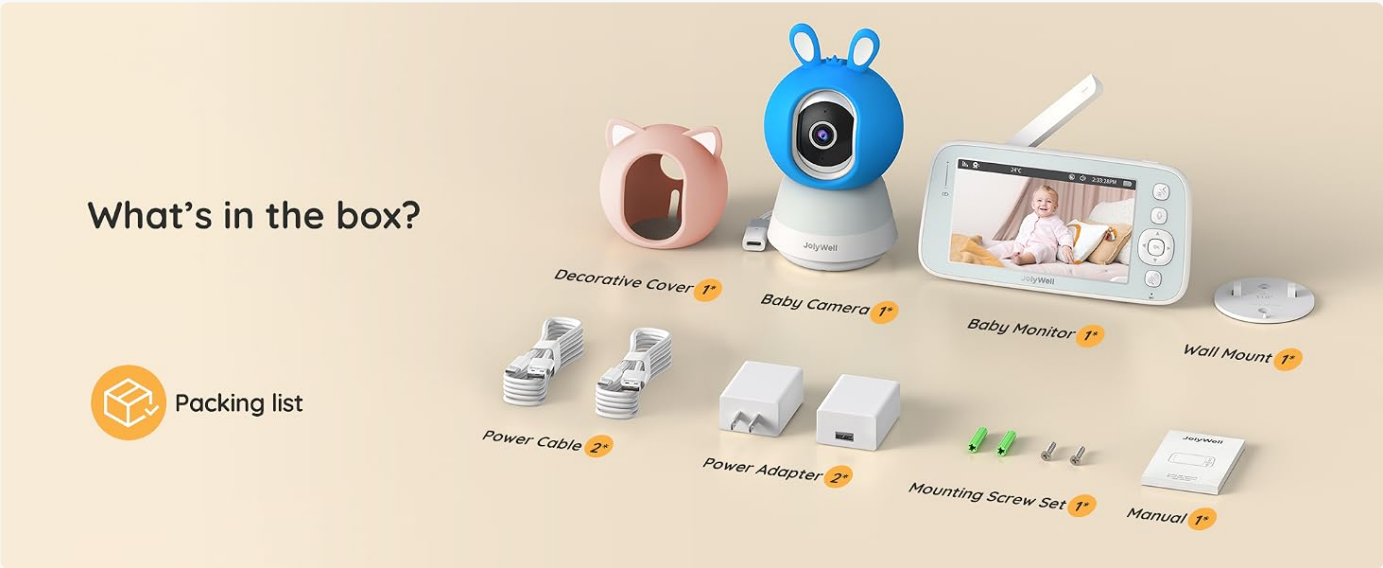


Figure 2.1: Package Contents

- Baby Camera (1)
- Baby Monitor (Parent Unit) (1)
- Decorative Cover (Blue & Pink) (2)

- Power Cable (2)
- Power Adapter (2)
- Mounting Screw Set (1)
- User Manual (1)

3. PRODUCT OVERVIEW

The JolyWell 2K Video Baby Monitor offers comprehensive monitoring capabilities with both a dedicated 5-inch parent unit and smartphone app access.

Key Features:

- **Dual Viewing Options:** Monitor via the 5-inch handheld display or a smartphone app.
- **2K Full HD Camera:** Provides clear 2MP 1080P video resolution.
- **Pan & Tilt Control:** Camera can pan 355° horizontally and tilt 60° vertically.
- **Auto Tracking:** Automatically follows your baby's movements.
- **Night Vision:** Infrared night vision for clear monitoring in low light.
- **Motion & Sound Alerts:** Real-time notifications for baby's movements or sounds.
- **Two-Way Audio:** Communicate with your baby remotely.
- **VOX Mode:** Voice-activated screen and sound activation.
- **Lullabies:** Built-in soothing melodies.
- **Recording:** Supports local TF card recording (not included) and optional cloud storage.
- **Room Comfort Sensors:** Built-in temperature and humidity sensors.
- **Feeding Reminders:** Customizable alerts for feeding schedules.



Figure 3.1: Dual Monitoring: App & Monitor

Figure 3.2: Intelligent Auto-Tracking

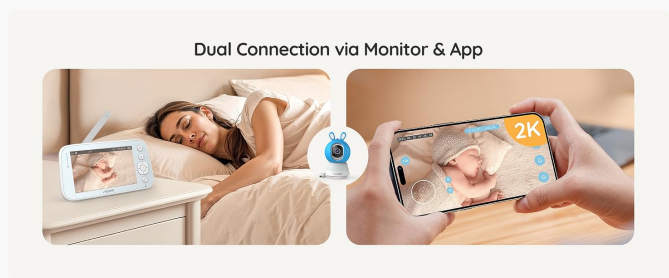


Figure 3.3: Advanced Night Vision

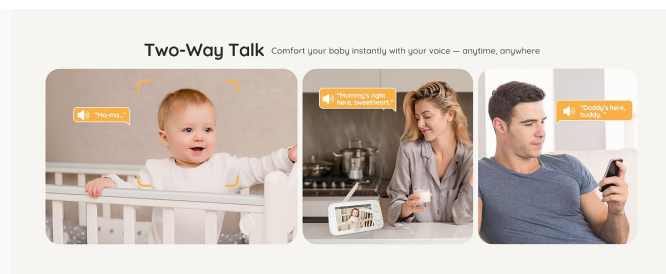


Figure 3.4: Instant Motion/Sound Alerts

4. SETUP GUIDE

4.1 Powering On

1. Connect the power adapter to the Baby Camera and plug it into a power outlet.
2. Connect the second power adapter to the Baby Monitor (Parent Unit) and plug it into a power outlet. The parent unit has a rechargeable battery for portable use once charged.
3. Press and hold the power button on the parent unit to turn it on.

4.2 Camera Placement

Place the Baby Camera in a location that provides a clear view of your baby. Ensure it is out of reach of children and pets. The camera can be placed on a flat surface or mounted to a wall or ceiling using the provided mounting screw set.

4.3 App Connection (Optional)

For smartphone monitoring, download the designated app (refer to the manual for app name, typically found via QR code or app store search). Follow the in-app instructions to pair your camera with your smartphone. This allows for remote viewing and control.

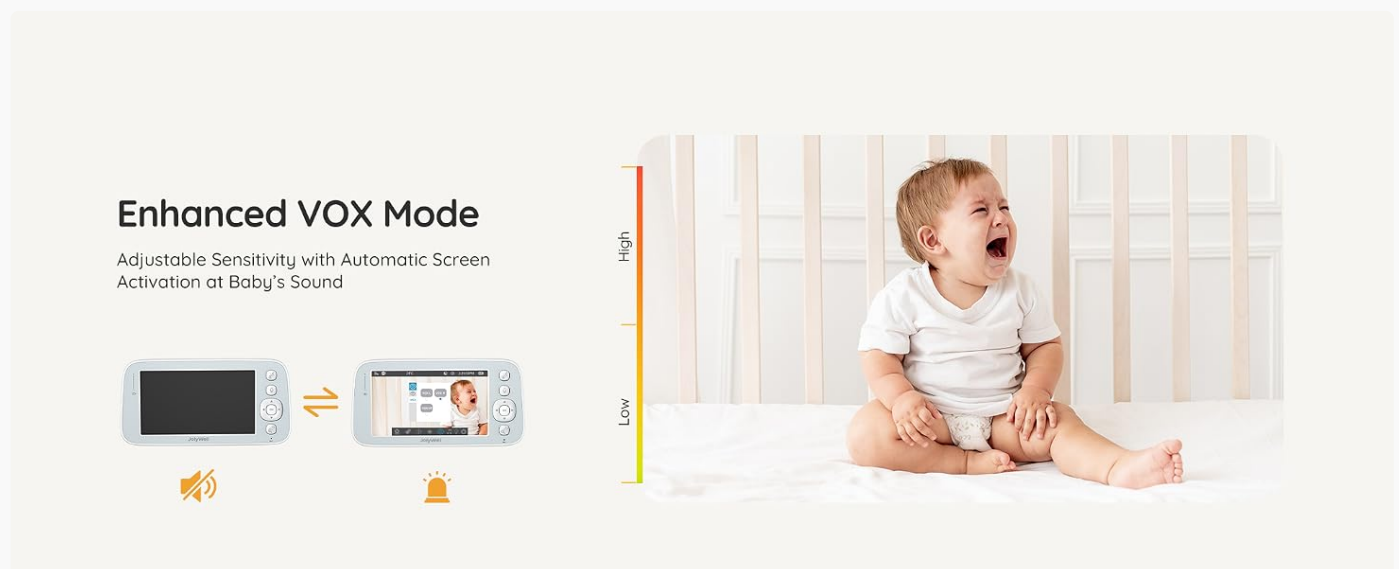


Figure 4.1: Dual Connection via Monitor & App

4.4 Private Connection (Monitor Only Mode)

The monitor and camera are pre-paired for direct use without Wi-Fi. This mode provides a secure, encrypted connection for local monitoring.

Customizable Feeding Alerts

Choose from Custom, 2 Hours, 3 Hours, 4 Hours, or Off — Alarm resets when monitor is off 5 Options: Custom Time, 2h, 3h, 4h, or Off (Resets When Monitor is Powered Off)



Figure 4.2: Private Connection, No WiFi Needed

5. OPERATING INSTRUCTIONS

5.1 Basic Monitoring

Once powered on, the parent unit will automatically display the live video feed from the camera. The 5-inch screen provides a clear view of your baby.

5.2 Pan, Tilt, and Zoom

Use the directional buttons on the parent unit to remotely adjust the camera's viewing angle. The camera supports 355° horizontal pan and 60° vertical tilt. Digital zoom functionality is also available.

Instant Alerts, Real-Time Connection

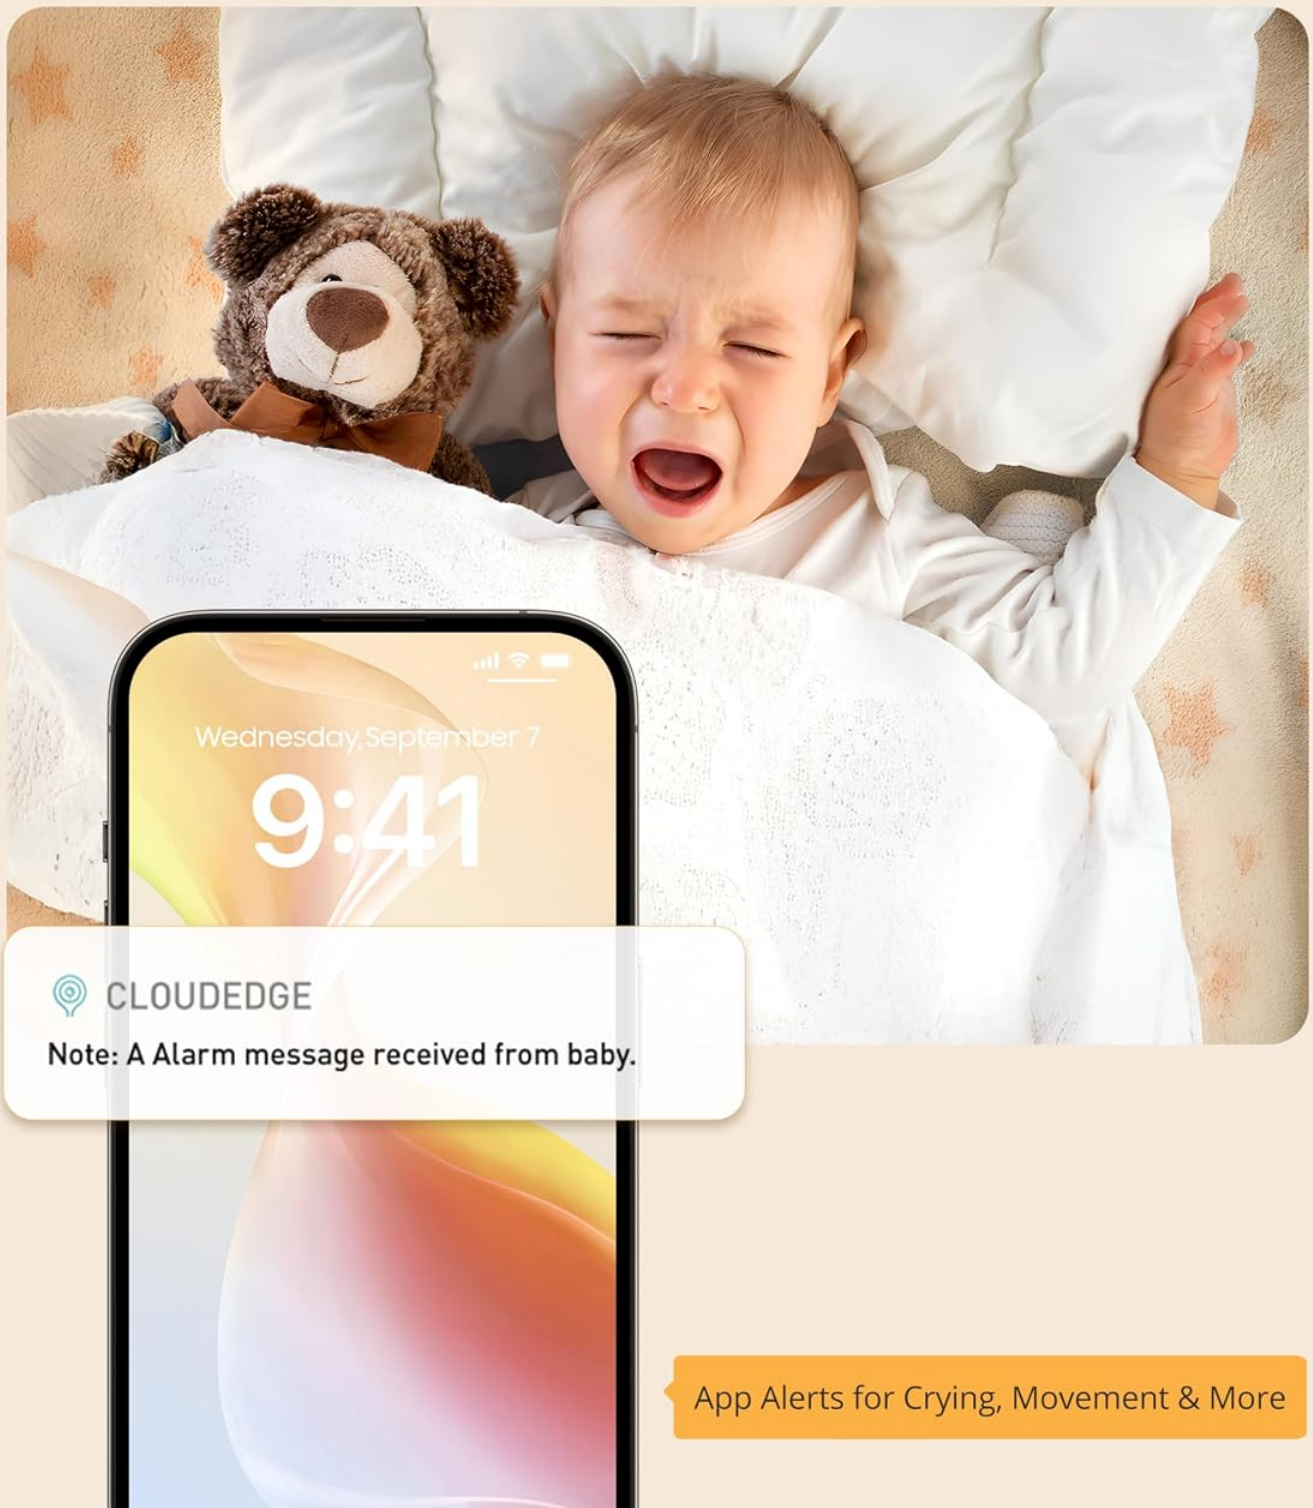


Figure 5.1: 3X Digital Zoom

5.3 Two-Way Audio

Press and hold the microphone button on the parent unit to speak to your baby through the camera's speaker. Release the button to listen.

Smart Cry Detection

High, Medium, Low Sensitivity with Repeat Alerts Every 60 Seconds



Figure 5.2: Two-Way Talk Functionality

5.4 Lullabies

Access the menu on the parent unit to select and play built-in lullabies to soothe your baby. You can adjust the volume as needed.

Extended Battery Life

Subtitle: Use up to 10 Hours with Audio Only, or 6 Hours with Audio & Video



3000mAh



10 Hours
Always on



6 Days
Audio On

Figure 5.3: Soothing Lullabies

5.5 VOX Mode

VOX (Voice Operated eXchange) mode automatically activates the screen and sound on the parent unit when noise is detected in the baby's room. Adjust the sensitivity level in the settings menu.



Figure 5.4: Enhanced VOX Mode

5.6 Alerts (Motion, Sound, Temperature)

- **Motion/Sound Alerts:** The monitor can send real-time alerts to the parent unit or your smartphone (if connected) when motion or sound is detected. Adjust sensitivity in settings.
- **Smart Cry Detection:** Configure high, medium, or low sensitivity for cry detection with repeat alerts every 60 seconds.
- **Temperature Alerts:** Set desired temperature thresholds. An audible alarm will sound every 5 minutes if the room temperature falls outside these thresholds.



Figure 5.5: Smart Cry Detection

Figure 5.6: Environment Temperature Alerts

5.7 Recording & Sharing

Insert a TF card (not included) into the camera for local video recording. Optional cloud storage subscriptions may also be available through the app. Recorded moments can be tagged, saved, and shared with family via the app's "Moments Wall" feature.

Video Recording & Sharing

Subtitle: Save videos with an SD card or optional cloud storage. Watch replays anytime, and share access with up to 5 users via the app



5 Users



Figure 5.7: Recording & Sharing Options

5.8 Feeding Reminders

Set customizable feeding alerts on the parent unit to help maintain your baby's schedule. Options include custom times, 2, 3, or 4-hour intervals, or off. Alarms reset when the monitor is powered off.



Figure 5.8: Customizable Feeding Alerts

5.9 Extended Battery Life

The parent unit features a 3000mAh battery, providing up to 12 hours of continuous monitoring on a single charge.



Figure 5.9: Extended Battery Life

5.10 Multi-Camera Support

The system supports up to 4 cameras for monitoring multiple rooms or angles simultaneously.

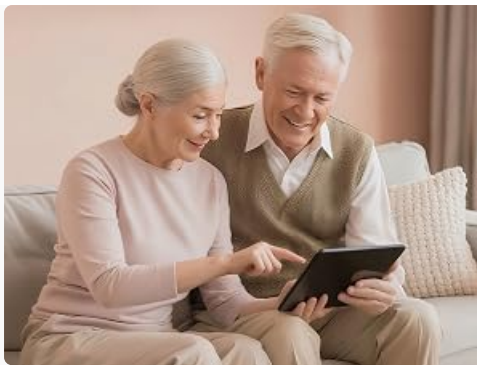


Figure 5.10: Multi-Camera Support

6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the camera and monitor surfaces. Do not use liquid cleaners or aerosols.
- **Storage:** Store the device in a cool, dry place when not in use.
- **Battery Care:** For optimal battery life, avoid fully discharging the parent unit's battery frequently. Charge it regularly.
- **Cable Management:** Ensure power cables are securely connected and not damaged. Keep cables out of reach of children.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No image on parent unit	Camera or monitor not powered on; out of range; not paired.	Ensure both units are powered and charged. Move units closer. Re-pair if necessary (refer to app/manual for pairing instructions).
Poor image quality	Low light conditions (night vision active); camera lens dirty; poor signal.	Night vision is black and white. Clean camera lens. Move units closer to improve signal.
No sound or distorted sound	Volume too low; microphone/speaker obstructed; out of range.	Increase volume on parent unit. Ensure no obstructions. Move units closer.
App connection issues	Incorrect Wi-Fi password; poor Wi-Fi signal; app not updated.	Verify Wi-Fi credentials. Ensure strong Wi-Fi signal. Update app to the latest version.
Parent unit battery drains quickly	Continuous screen-on time; old battery.	Utilize VOX mode to conserve battery. Ensure full charge before use. Contact support if battery life significantly degrades.

8. SPECIFICATIONS

Feature	Specification
Model Number	JW-BBM005

Feature	Specification
Video Capture Resolution	1080p (2K)
Screen Size (Parent Unit)	5 inches
Pan Angle	355 Degrees
Tilt Angle	60 Degrees
Viewing Angle	110 Degrees
Night Vision Range	30 Meters
Frame Rate	30 Fps
Wireless Technology	Wi-Fi
Parent Unit Battery	3000mAh (Up to 12 hours)
Power Source	AC (12 Volts, 5 Watts)
Material	Weatherproof Housing
Dimensions (L x W x H)	8.4 x 1.9 x 16.5 Centimetres
Item Weight	100 g
Special Features	AI Motion Detection, VOX Mode, Two-Way Audio, Lullabies, Temperature/Humidity Sensor

9. WARRANTY AND SUPPORT

The JolyWell 2K Video Baby Monitor comes with a 12-month warranty from the date of purchase. This warranty covers manufacturing defects and ensures the product functions as intended under normal use. For technical support, warranty claims, or any questions regarding your product, please contact JolyWell customer service:

- **Email:** support@jolywell.com
- **Online Support:** Visit the JolyWell official website for FAQs and additional resources.

Please have your model number (JW-BBM005) and purchase information ready when contacting support.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0FDQHZ53F>

More documents and user manuals: <https://manuals.plus/>