

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Bextgoo](#) /

› [Bextgoo A25 Mini Body Camera User Manual](#)

## Bextgoo A25-64GB-US

# Bextgoo A25 Mini Body Camera User Manual

Model: A25-64GB-US

## 1. INTRODUCTION

Thank you for choosing the Bextgoo A25 Mini Body Camera. This compact and versatile device is designed for capturing high-quality video and photos in various scenarios, from daily commutes to outdoor activities. Featuring 1080P HD recording, 160° wide-angle view, night vision, motion detection, and a built-in 64GB microSD card, it offers a reliable and easy-to-use solution for personal security and memory capture. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance of your device.



The Bextgoo A25 Mini Body Camera is suitable for a wide range of applications, including personal security, outdoor sports, and monitoring.

## 2. PACKAGE CONTENTS

Please check the package to ensure all items are present:

- 1 x Bextgoo A25 Mini Body Camera
- 1 x 64GB MicroSD Card (pre-installed)
- 1 x Card Reader
- 1 x USB Cable

### 3. PRODUCT OVERVIEW

Familiarize yourself with the camera's components and controls.

# True 1080P + 160° Wide View

Maximize Your View with True 1080P and a 160° Wide-Angle Lens



Side view of the camera highlighting the control buttons and USB port.

- **Lens:** Captures video and images.
- **Power/Mode Button:** Used to power on/off and switch between modes.
- **Record/Shutter Button:** Initiates/stops recording or takes a photo.
- **LED Indicator:** Displays current status (e.g., recording, charging).
- **USB Port:** For charging and data transfer.
- **MicroSD Card Slot:** Houses the pre-installed 64GB microSD card.
- **Clip:** For attaching the camera to clothing or other surfaces.

## 4. SETUP

### 4.1 Initial Charging

Before first use, fully charge the camera. Connect the camera to a USB power adapter (not included) or a computer using the provided USB cable. The LED indicator will show charging status and turn off when fully charged.

### 4.2 MicroSD Card

The camera comes with a 64GB microSD card pre-installed. No additional setup is required for storage. The camera supports up to 128GB microSD cards if you wish to upgrade.



The camera features pre-installed 64GB storage, eliminating the need for Wi-Fi or complex setup.

### 4.3 Setting Time and Date Stamp

To customize the timestamp settings for your videos and photos, connect the camera to a computer via the USB cable. Access the camera's storage and locate the configuration file. Follow the instructions within the file to adjust the date and time format.

## 5. OPERATING INSTRUCTIONS

### 5.1 Power On/Off

- Power On:** Hold the Power/Mode button for approximately 3 seconds. The LED indicator will light up.
- Power Off:** Hold the Power/Mode button for approximately 3 seconds. The LED indicator will turn off.

### 5.2 Video Recording

The camera records in 1080P HD with a 160° wide-angle lens.

- Start Recording:** After powering on, press the Record/Shutter button once. The LED indicator will flash to indicate recording is in progress.
- Stop Recording:** Press the Record/Shutter button once again. The LED indicator will stop flashing.

Steps to initiate video recording on the Bextgoo A25 Mini Body Camera.

### 5.3 Photo Capture

- Take Photo:** After powering on, press the Power/Mode button once to switch to photo mode (if applicable),

refer to LED indicator for mode). Then, press the Record/Shutter button once to take a photo.

Steps to capture a photo with the Bextgoo A25 Mini Body Camera.

## 5.4 Night Vision

The camera is equipped with 6 infrared lights for clear recording in low-light conditions.

- **Activate Night Vision Video:** Hold the Power/Mode button for 3 seconds to power on. Then, press the Record/Shutter button once to start night vision video recording.
- **Activate Night Vision Photo:** Hold the Power/Mode button for 3 seconds to power on. Then, press the Power/Mode button once to switch to photo mode. Press the Record/Shutter button once to take a night vision photo.



The camera's night vision capability ensures clear footage even in complete darkness.

## 5.5 Motion Detection

When enabled, the camera will automatically start recording when motion is detected.

- **Activate Daytime Motion Capture:** Hold the Power/Mode button for 3 seconds to power on. Then, hold the Power/Mode button again for 3 seconds to activate motion detection.
- **Activate Nighttime Motion Capture:** Hold the Power/Mode button for 3 seconds to power on. Then, press the Record/Shutter button once to activate night vision. After that, hold the Power/Mode button for 3 seconds to activate motion detection.



Motion detection automatically captures events, with customizable timestamp settings available via PC setup.

## 5.6 Loop Recording

The camera supports loop recording. When the storage is full, the camera will automatically overwrite the oldest files with new ones, ensuring continuous recording without manual intervention.

## 6. PLAYBACK AND DATA TRANSFER


You can review your captured footage using two methods:

### 6.1 Via Card Reader

Remove the microSD card from the camera and insert it into the provided card reader. Connect the card reader to your computer's USB port to access the files.

### 6.2 Via USB Cable

Connect the camera directly to your computer using the supplied USB cable. The camera will appear as a removable disk, allowing you to browse and transfer files.

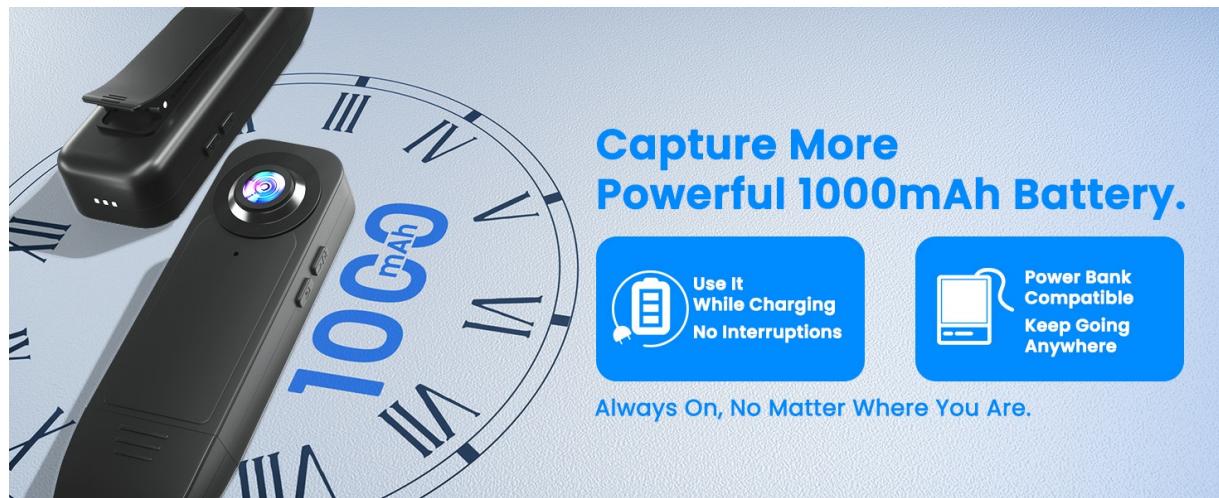

Footage can be accessed by connecting the camera via USB or by using the included card reader.

## 7. WEBCAM FUNCTIONALITY

The Bextgoo A25 Mini Body Camera can also function as a webcam for your computer.

1. **Step 1:** Remove the microSD card from the camera.
2. **Step 2:** Connect the camera to your computer using the USB cable.
3. **Step 3:** Your computer should recognize the device as a webcam. Select it as your camera source in your video conferencing application.

Instructions for using the Bextgoo A25 Mini Body Camera as a webcam.

## 8. CHARGING

The camera features a built-in 1000mAh rechargeable battery. It supports continuous use while charging, allowing for extended operation via a wall adapter or power bank.

- Connect the camera to a USB power source using the provided USB cable.
- The LED indicator will show charging status.
- A full charge typically takes a few hours.

## One Click, One Moment — Snap Photos Anytime

Easily snap high-quality Photos anytime, anywhere — freeze the moments that matter most with one simple press.



The 1000mAh battery supports extended use and can operate while charging.

## 9. MAINTENANCE

- Keep the camera dry. Do not expose it to moisture or liquids.
- Clean the lens gently with a soft, lint-free cloth. Avoid abrasive materials.
- Store the camera in a cool, dry place away from direct sunlight and extreme temperatures.
- Avoid dropping or subjecting the camera to strong impacts.
- Regularly back up your important footage to a computer or external storage device.

## 10. TROUBLESHOOTING

Problem	Possible Cause	Solution
Camera does not power on.	Low battery.	Charge the camera fully.
Cannot record video/take photos.	MicroSD card full or corrupted.	Transfer files to a computer and format the microSD card. Ensure the card is properly inserted.
Video playback shows no video (audio only).	File corruption or incompatible player.	Try playing the file on a different media player. Ensure the camera was fully charged before recording. If issue persists, format the microSD card and test again.
Motion detection not working.	Incorrect activation sequence.	Refer to Section 5.5 for correct activation steps. Ensure sufficient light for daytime detection or night vision is active for nighttime detection.
Timestamp is incorrect.	Time not synchronized.	Connect to a computer and adjust the time settings as described in Section 4.3.

## 11. SPECIFICATIONS

Feature	Detail

Feature	Detail
Model Number	A25-64GB-US
Video Resolution	1080P HD
Lens Angle	160° Wide-Angle
Storage	64GB MicroSD (built-in, expandable up to 128GB)
Night Vision	6 Infrared Lights
Battery Capacity	1000mAh
Connectivity	USB
Special Features	Motion Detection, Loop Recording, Timestamp, Webcam Functionality
Item Weight	1.20 oz (approx. 34g)
Dimensions	Approx. 4.45 x 4.41 x 1.73 inches (package dimensions, actual device is smaller)

## 12. WARRANTY AND SUPPORT

---

Bextgoo products are designed for reliability and performance. For warranty information and technical support, please refer to the official Bextgoo website or contact customer service through your purchase platform. Keep your purchase receipt as proof of purchase for warranty claims.