

Uten SL-A01P-2

Uten SL-A01P-2 Blender Instruction Manual

Model: SL-A01P-2

1. IMPORTANT SAFETY INSTRUCTIONS

Before using your Uten Blender, please read all instructions carefully and retain them for future reference. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- Always ensure the blender is unplugged before assembling, disassembling, or cleaning.
- Do not immerse the motor base in water or other liquids. Clean with a damp cloth only.
- Keep hands and utensils out of the jar while blending to reduce the risk of severe injury to persons or damage to the blender. A scraper may be used but only when the blender is not running.
- Do not blend hot liquids. Allow hot ingredients to cool before blending to prevent pressure buildup and potential scalding.
- Ensure the lid is securely in place before operating the blender.
- Do not operate the blender with a damaged cord or plug, or after the appliance malfunctions or has been dropped or damaged in any manner.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- **Safety Lock Feature:** The blender will only operate when the glass jar is correctly aligned and locked onto the motor base. If the blue light is on but the blender doesn't run, check the jar's alignment.

2. PRODUCT OVERVIEW AND COMPONENTS

The Uten SL-A01P-2 Blender is designed for efficient blending of various ingredients, from smoothies to ice crushing. It features an 800W motor, a durable 60 oz (usable) glass jar, and a 6-blade system.

Components:

- **Motor Base:** Contains the 800W motor and control panel.
- **Glass Jar:** 68 oz capacity (60 oz usable), made of thick, durable, food-safe glass.
- **Blade Assembly:** Integrated 6-blade system for efficient mixing.
- **Lid:** Securely fits onto the glass jar.
- **Measuring Cup (Lid Insert):** Small removable cup in the lid for adding ingredients during blending.

Food Grade Material & Safe Design



Overheating
Protection



Heat
Dissipation



Non-slip
Base



Safe and
Odorless



Unbreakable



Glass Jug



Image: Uten Blender showcasing food-grade materials and safety features like overheating protection, heat dissipation, non-slip base, and a durable glass jug. Fresh fruits are visible around the blender.

800W


High Power Motor

42000

RPM/min

6 Blades

High Efficiency Mixing

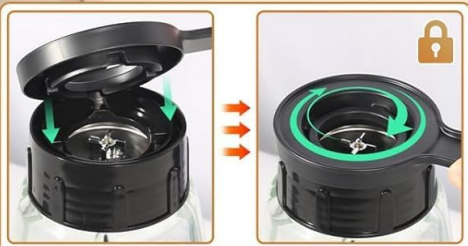

Retaining Ring Wrench



Image: Detailed view of the Uten Blender's 800W motor, 42000 RPM, 6-blade assembly, and overall dimensions. Also shows the retaining ring wrench and the safety lock mechanism for the jar.

6 Blades

High Efficiency Mixing



Image: Close-up illustration of the Uten Blender's 6-blade system, demonstrating its high-efficiency mixing capability with fruits like strawberry, orange, and kiwi being blended.

3. SETUP AND ASSEMBLY

1. **Unpack:** Carefully remove all components from the packaging.
2. **Clean:** Before first use, wash the glass jar, lid, and measuring cup in warm, soapy water. Rinse thoroughly and dry. Wipe the motor base with a damp cloth.
3. **Assemble Jar:** Ensure the blade assembly is securely attached to the bottom of the glass jar.
4. **Place Jar on Base:** Position the glass jar onto the motor base. Rotate the jar clockwise until it clicks into place and is securely locked. The blender will not operate if the jar is not correctly aligned and locked.
5. **Add Ingredients:** Place your desired ingredients into the glass jar. Do not exceed the maximum fill line (60 oz usable capacity).
6. **Secure Lid:** Place the lid onto the glass jar and press down firmly to ensure it is sealed. Insert the measuring cup into the lid opening.
7. **Plug In:** Plug the power cord into a standard electrical outlet.

4. OPERATING INSTRUCTIONS

The Uten Blender offers 18 variable speed levels and 3 automatic programs for versatile blending.

Customized 18 Speeds

Pulse Ice Crushed Smoothie

"Pulse"
Press to work,
release to pause



"Ice crush"
For smoothies - 39s



"Smoothie"
For milkshakes - 1min



"Min-Max"
Customized speed selection,
3min each run





Image: The Uten Blender's control panel, highlighting the 18-speed dial and three dedicated program buttons: Pulse, Ice Crush, and Smoothie. Descriptions for each program are also shown.

Using the Speed Dial:

1. Ensure the blender is assembled and plugged in.
2. Turn the central dial to select one of the 18 speed levels, from "Min" to "Max". Start with lower speeds for thicker mixtures and gradually increase as needed.
3. Blend until desired consistency is achieved.
4. Turn the dial back to the "OFF" position to stop blending.

Using Automatic Programs:

The blender features three one-touch programs for common blending tasks:

- **Pulse:** Press and hold the "Pulse" button for intermittent blending. Release to stop. Ideal for chopping ingredients or quick bursts of power.
- **Ice Crush:** Press the "Ice Crush" button for a dedicated ice crushing cycle (approximately 39

seconds).

- **Smoothie:** Press the "Smoothie" button for an optimized smoothie blending cycle (approximately 1 minute).

After using any program or manual speed, turn the dial to "OFF" and unplug the blender before removing the jar.

5. CLEANING AND MAINTENANCE

Regular cleaning ensures optimal performance and extends the life of your Uten Blender.

1. **Unplug:** Always unplug the blender from the power outlet before cleaning.
2. **Self-Cleaning Function:** For quick cleaning, add warm water and a drop of dish soap to the glass jar (do not exceed half capacity). Secure the lid. Run the blender on a low speed or use the "Pulse" function for 30-60 seconds. Empty the jar and rinse thoroughly.
3. **Manual Cleaning:**
 - **Glass Jar, Lid, Measuring Cup:** These parts are dishwasher safe (top rack recommended) or can be washed by hand in warm, soapy water.
 - **Blade Assembly:** Exercise extreme caution when cleaning the blades as they are sharp. Use a brush to clean around the blades. Ensure to dry the blades and blade base immediately after cleaning to prevent corrosion and extend product life.
 - **Motor Base:** Wipe the motor base with a damp cloth. Never immerse the motor base in water or any other liquid.
4. **Drying and Storage:** Ensure all parts are completely dry before reassembling or storing the blender. Store in a dry place.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Blender does not start (blue light is on).	Glass jar is not correctly aligned or locked onto the motor base.	Ensure the glass jar is securely placed and rotated clockwise until it clicks into its locked position.
Blender does not start (no lights).	Blender is not plugged in, or power outlet is not active.	Check that the power cord is securely plugged into a working electrical outlet.
Motor stops during operation.	Overheating due to prolonged use or blending excessively thick mixtures.	Unplug the blender and allow it to cool down for at least 15-20 minutes. Reduce the load or add more liquid before restarting.
Ingredients are not blending smoothly.	Too little liquid, too many solid ingredients, or ingredients are too large.	Add more liquid, reduce the amount of solid ingredients, or cut ingredients into smaller pieces. Use the "Pulse" function to break down larger pieces.
Loud noise or vibration.	Jar not seated correctly, or ingredients are unbalanced.	Turn off and unplug the blender. Re-seat the jar. Redistribute ingredients evenly.

7. SPECIFICATIONS

Feature	Detail
Model Number	SL-A01P-2
Brand	Uten
Power	800 Watts
Jar Capacity	68 oz (2 Liters), 60 oz usable
Jar Material	Thick, Durable Glass
Blade Type	6-Blade System
Speed Settings	18 Variable Speeds
Programs	Ice Crush, Smoothie, Pulse
Product Dimensions (D x W x H)	14.4" x 10.62" x 7.8"
Power Source	AC/DC
Special Features	Heavy Duty, Safety Lock, Overheating Protection, Non-slip Base

Uten	Others
800W Motor	600W Motor
68 Oz Glass Jug (max usable volume 60 Oz)	50 Oz
18 Speeds + Ice Crush + Smoothie + Pulse	2-Speed
42000 rpm/min	15000 rpm/min
6-Leaf Blade	4-Leaf Blade
Thickened Glass Jug	Thin Glass Jug

Image: A comparison chart highlighting key features of the Uten Blender, including its 800W motor, 68 oz glass jug, 18 speeds, 42000 RPM, 6-leaf blade, and thickened glass jug.

8. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the contact details provided with your purchase or visit the official Uten website. Keep your purchase receipt as proof of purchase for any warranty claims.

For further assistance, you may contact Uten customer service.