

Accsoon CineView M7 Pro

Accsoon CineView M7 Pro User Manual

Comprehensive instructions for your 7-inch Dual-Band Wireless SDI HDMI Video Transmission System & Camera Field Monitor

1. INTRODUCTION

Thank you for choosing the Accsoon CineView M7 Pro. This device integrates a high-quality camera monitor with a dual-band wireless video receiver, offering a versatile solution for professional video production. It supports both HDMI and SDI inputs/outputs, 4K60 video formats, and features advanced monitoring tools, live streaming capabilities, and camera control functions. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance of your CineView M7 Pro.

2. SAFETY INFORMATION

- Read all instructions carefully before using the device.
- Do not expose the device to water, moisture, or extreme temperatures.
- Use only power adapters and batteries specified by Accsoon.
- Avoid dropping or subjecting the device to severe impact.
- Do not attempt to disassemble or repair the device yourself. Contact authorized service personnel.
- Keep the device away from strong magnetic fields.
- Ensure proper ventilation during operation to prevent overheating.

3. PACKAGE CONTENTS

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact your retailer or Accsoon support.

- CineView M7 Pro Wireless Video Receiver & Camera Field Monitor (2-in-1) x1
- Dual-band Antennas x4
- User Manual x1


In the Box



CineView M7 Pro x1



Dual-Band Antennas x4



User Manual x1

Image: Contents of the Accsoon CineView M7 Pro package, showing the monitor, four antennas, and a user manual.

4. PRODUCT OVERVIEW

4.1 Key Features

- **Integrated Monitor and Receiver:** Functions as both a high-quality camera monitor and a wireless video receiver.
- **Dual-Band Wireless System:** Utilizes 2.4GHz and 5GHz frequencies for stable, low-latency (60ms) transmission up to 1200ft (350m).
- **4K60 Video Support:** Supports video input/output up to 3840x2160 at 60fps via HDMI, and 1080P via SDI/HDMI.
- **Versatile I/O:** Features SDI and HDMI input/output, 3.5mm microphone and headphone jacks, USB 3.0 port, and SD card slot.
- **Cinema Grade Display:** 7-inch 1920x1080 OLED display with 1000nits brightness, 1000:1 contrast ratio, and 127-point 3D LUT support.
- **Advanced Monitoring Tools:** Includes False Color, Histogram, Zebras, Waveform, and Vectorscope via Accsoon SEE App.


- **Live Streaming & Recording:** Direct RTMP/SRT live streaming and 4K60 recording to external USB drives/SD cards/SSDs.
- **Camera Control:** Adjust shutter speed, aperture, ISO, and color temperature for compatible Sony and Canon cameras.
- **Multiple Power Options:** Supports NP-F batteries, 6-16.8V DC input, and 5V USB-C power.

4.2 Component Identification



Image: Front view of the Accsoon CineView M7 Pro monitor with its display showing a colorful image, and a partial rear view illustrating the antenna setup.

Supports PD, DC & NP-F Power Supply

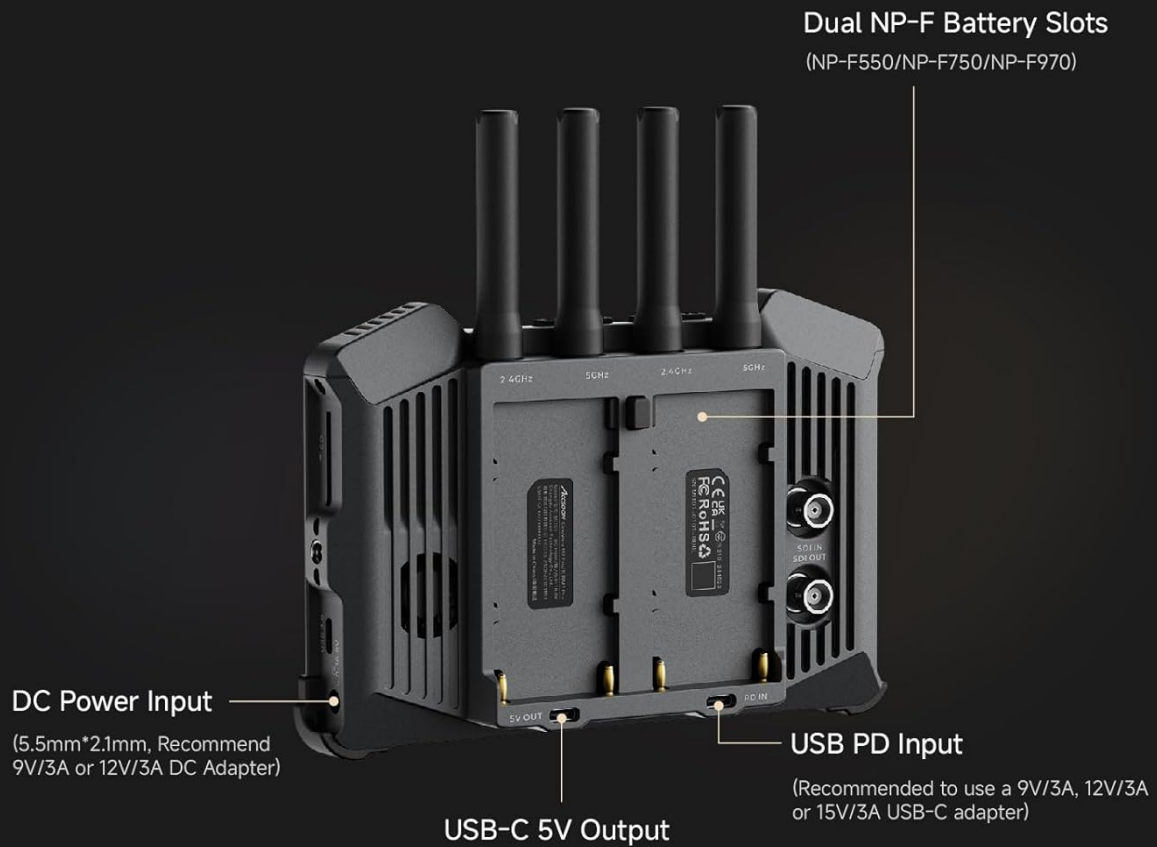

Note: (NP-F batteries, DC cable and USB-C cables are not included)

Image: Rear view of the Accsoon CineView M7 Pro highlighting the dual NP-F battery slots, DC power input, USB PD input, and USB-C 5V output ports.



Image: Diagram illustrating the various input/output ports of the CineView M7 Pro, including 3G SDI In/Out, HDMI 2.0 In/Out, SD Card Slot, USB 3.0 Port, 3.5mm Microphone Jack, and 3.5mm Headphone Jack.

5. SETUP

5.1 Attaching Antennas

Carefully screw the four dual-band antennas onto the corresponding antenna ports on the top of the CineView M7 Pro. Ensure they are securely fastened but do not overtighten.

5.2 Powering the Device

The CineView M7 Pro offers multiple power options:

- **NP-F Batteries:** Insert compatible NP-F series batteries (NP-F970/750/550) into the dual battery slots on the rear of the device.
- **DC Input:** Connect a 6-16.8V DC power adapter (5.5mm*2.1mm connector, recommended 9V/3A or 12V/3A) to the DC IN port.
- **USB-C PD Input:** Connect a USB-C power delivery (PD) adapter (recommended 9V/3A, 12V/3A, or 15V/3A) to the USB PD input port.

Note: NP-F batteries, DC cables, and USB-C cables are not included and must be purchased separately.


5.3 Connecting to a Camera/Transmitter

Depending on your intended use, connect the CineView M7 Pro as follows:


- **Monitor Mode (Wired):** Connect your camera's HDMI or SDI output to the corresponding input port on the CineView M7 Pro. The device will display the input signal.
- **Receiver Mode (Wireless):** Ensure the CineView M7 Pro is set to RX mode. It will automatically pair with compatible Accsoon CineView transmitters (Master 4K/2 SDI/HE/SE/Quad) based on configured settings. No wired video input is supported in RX mode.

Monitor and Receiver- All in One

Monitor Mode

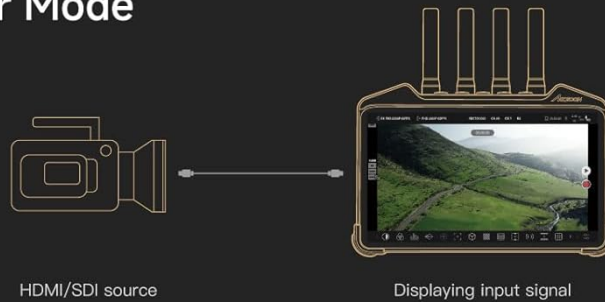

Receiver Mode

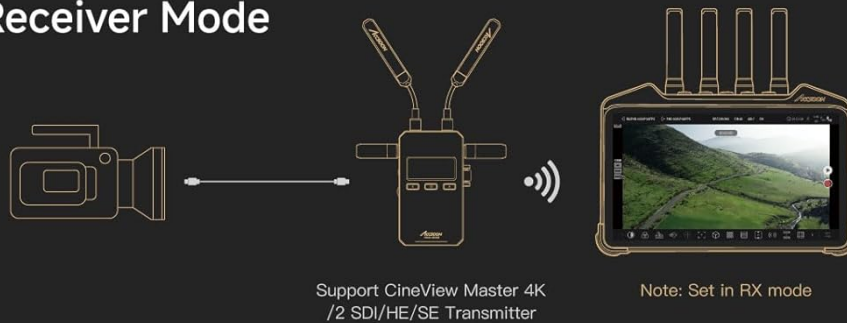

 **2.4GHz+5GHz**
DUAL-BAND
Accsoon patented Dual-Band technology

350m/1200ft **60ms**
Range Latency

Image: Diagram illustrating the two operational modes: Monitor Mode, where the M7 Pro displays a wired HDMI/SDI source, and Receiver Mode, where it receives a wireless signal from a CineView transmitter.

6. OPERATING INSTRUCTIONS

6.1 Power On/Off

Press and hold the power button located on the side of the device to turn it on or off.

6.2 Navigating the User Interface

The CineView M7 Pro features an intuitive touchscreen interface. Swipe gestures and taps are used to access menus, adjust settings, and activate monitoring tools. Customizable physical buttons (F1, F2, F3) can be assigned to frequently used functions.

6.3 Monitoring Features (Accsoon SEE App)

Utilize the Accsoon SEE App for advanced monitoring functionalities. Connect your mobile device to the CineView M7 Pro's Wi-Fi network to access tools such as:

- False Color
- Histogram
- Zebras
- Waveform
- Vectorscope
- Focus Peaking
- Zoom
- Aspect Ratio Guides

Accsoon SEE App help Monitoring

Including False Color, Histogram, Zebras, Waveform, and Vectorscope



Image: The Accsoon CineView M7 Pro display showing various monitoring tools and the Accsoon SEE app logo, indicating app integration for advanced features.

6.4 LUT Management


The CineView M7 Pro supports 127-point 3D LUTs and .cdl files for precise color management. You can import custom LUTs to maintain color consistency throughout your workflow. LUTs can be applied for monitoring, recording, streaming, and cloud sharing.

Unrivaled Display Color Precision

.cdl file support



Effortlessly import and apply 3D LUTs up to 127 points

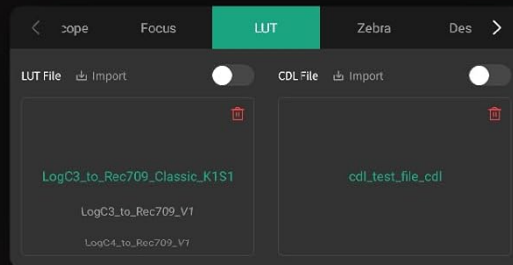

Higher accuracy with 3D LUTs tetrahedral interpolation



LUT burnt-in monitoring, recording, streaming, and cloud sharing



Image: Screenshot of the CineView M7 Pro's interface demonstrating .cdl file support and the ability to import and apply 3D LUTs up to 127 points.

6.5 Live Streaming and Recording

The M7 Pro allows direct recording of 4K60 footage to external USB drives, SD cards, or SSDs in H.264/H.265 formats. It also supports RTMP/SRT live streaming to popular platforms via the Accsoon SEE App.

Note: Live streaming is only available when the CineView M7 Pro is operating in monitor mode with a wired video input.

6.6 Camera Control Functions

Control various camera settings directly from the CineView M7 Pro. This function is compatible with select Sony camera models (FX3, FX30, A7C II, A7SM3, A7M4, A9M3) and Canon camera models (R5, R5M2, R6, R6M2, R7, R8). Functions include:

- Shutter Speed Adjustment
- Aperture Control
- ISO Adjustment
- Color Temperature Parameters

- Touch Focus

7. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the device. For the screen, use a specialized screen cleaning solution and a microfiber cloth. Avoid abrasive materials or harsh chemicals.
- **Storage:** When not in use for extended periods, store the device in a cool, dry place, away from direct sunlight and extreme temperatures. Remove batteries if storing for a long time.
- **Firmware Updates:** Regularly check the Accsoon official website for firmware updates to ensure optimal performance and access to new features.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not power on.	Low or depleted battery; incorrect power connection.	Ensure batteries are charged or replace them. Verify DC or USB-C power adapter is correctly connected and providing sufficient power.
No video signal on screen.	Incorrect input mode; loose cable connection; incompatible video format.	Check if the device is in the correct mode (Monitor for wired, RX for wireless). Ensure HDMI/SDI cables are securely connected. Verify camera output format is supported by M7 Pro.
Wireless transmission unstable or disconnected.	Antennas not properly attached; interference; out of range.	Ensure all four antennas are securely attached. Minimize obstacles between transmitter and receiver. Reduce distance between devices. Avoid areas with strong Wi-Fi interference.
Accsoon SEE App not connecting.	Wi-Fi not enabled; incorrect network selection.	Ensure Wi-Fi is enabled on the M7 Pro and your mobile device. Connect your mobile device to the M7 Pro's Wi-Fi network.

9. SPECIFICATIONS

Feature	Detail
Product Dimensions	7.17 x 4.17 x 1.24 inches
Item Weight	1.32 pounds
Item Model Number	Accsoon CineView M7 Pro
Manufacturer	Accsoon
Display Size	7-inch
Resolution	1920x1080
Brightness	1000 nits

Feature	Detail
Contrast Ratio	1000:1
Wireless Frequency	2.4GHz + 5GHz Dual-Band
Transmission Range	Up to 1200ft (350m)
Latency	60ms
Video Input/Output	HDMI (up to 4K60), SDI (up to 1080P)
Power Input	NP-F Battery, 6-16.8V DC, 5V USB-C PD

10. WARRANTY AND SUPPORT

Accsoon products are designed and manufactured to the highest quality standards. For specific warranty details, please refer to the warranty card included with your product or visit the official Accsoon website.

For technical support, troubleshooting assistance, or service inquiries, please contact Accsoon customer support through their official channels. You can find contact information on the Accsoon website or through your authorized dealer.

Accsoon Official Store: [Visit Accsoon Store on Amazon](#)

Documents - Accsoon – CineView M7 Pro



[\[pdf\]](#) User Manual Frequently Asked Questions Specifications Warranty

mit01 CineView M7 PRO accsoon Thank you for choosing the Accsoon Pro wireless monitor

Seamlessly integrating transmission with professional monitoring capabilities creates a unified ecosystem both and Each unit undergoes precision calibration to deliver cinema grade color accuracy that meets film television production standards This Master 4K Support User Manual EN CN 2025 07 |||

AccsoonR is a trademark of Accsoon Technology Co., Ltd. Copyright C 2025

Accsoon All rights reserved ... tact Us 28. 18 Federal Communication Commission

Interference Statement 29. 0 1 In the Box CineView M7 Pro 1 2.4GHz/5GHz Dual-Band Antennas 4 User Manual 1 02 Introduction Thank you for...

lang:en score:50 filesize: 7 M page_count: 34 document date: 2025-05-24

[pdf] User Manual Frequently Asked Questions Specifications Warranty

mit01 CineView M7 PROacc mit01 manualaspectra nl content products 2620 0081 acc manual PROUser Manual7 MBCineView PROCineView Pro supports NP F series batteries DC power and USB C PD supply The system hot swapping i e when is Accsoon 7 Recording Monitor with Wireless M7PROv1v1acc manualbhphotovideo lit files 1246743bhphotovideo 1246743aspectra ||| ||| AccsoonR is a trademark of Accsoon Technology Co., Ltd. Copyright C 2025 Accsoon All rights reserved CineView M7 PRO User Manual V1.0 Contents 01 In the Box 0 1. 02 Introduction 0 1. 03 Product Features 0 1. 04 Applications 02. 05 Quick Use AccsoonR is a trademark of Accsoon Technology Co., Ltd. Copyright C 2025 Accsoon All rights reserved ... tact Us 28. 18 Federal Communication Commission Interference Statement 29. 0 1 In the Box CineView M7 Pro 1 2.4GHz/5GHz Dual-Band Antennas 4 User Manual 1 02 Introduction Thank you for... lang:en score:48 filesize: 7 M page_count: 34 document date: 2025-05-24




[pdf] Test Report

Measurement Report Kent MPE Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2AOH40101MIT 0101mit MPE Report Report No.:STS2409089H02 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S FCC ID:... lang:en score:46 filesize: 704.14 K page_count: 9 document date: 2025-07-07



[pdf] Declaration of Conformity

Differences Description simple Declaration Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2AOH40101MIT 0101mit Differences Description We Chengdu Accsoon Technology Co., LTD. state: Product CineView M7 Pro Model Name MIT01, MIT01H, MIT01P, MIT01S Trade Name: ACCSOON FCC ID: 2AOH40101MIT The electrical circuit design, layout, components used and internal wiring for above models are identical, different models... lang:de score:44 filesize: 150.3 K page_count: 1 document date: 2025-07-02

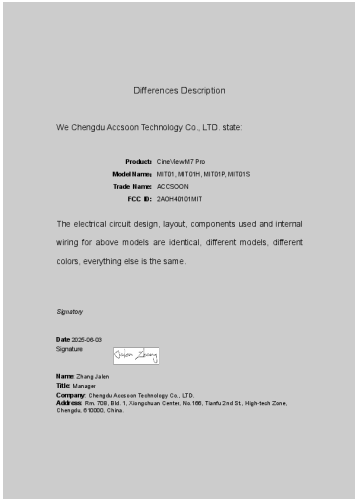




[pdf] Test Report


DFS WIFI Part 15 407 1 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2A0H40101MIT 0101mit

Radio Test Report Report No.: STS2409089W19 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S...
lang:en score:44 filesize: 1.64 M page_count: 24 document date: 2025-07-10

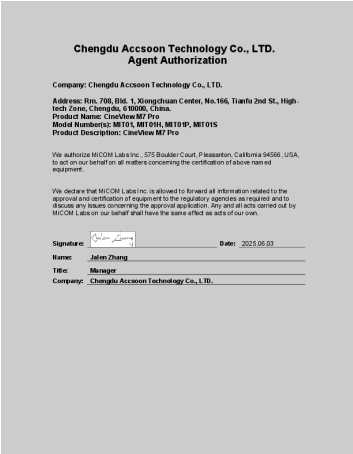


[pdf] Agent Authorization

PLEASE PRINT ON COMPANY LETTERHEAD MiCOM Labs Inc QMS Agent Authorization Rev 1 0
Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2A0H40101MIT 0101mit
Chengdu Accsoon Technology Co., LTD. Agent Authorization Company: Chengdu Accsoon Technology Co., LTD. Address: Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., Hightech Zone, Chengdu, 610000, China. Product Name: CineView M7 Pro Model Number s : MIT01, MIT01H, MIT01P, MIT01S Product Desc...
lang:en score:44 filesize: 95.04 K page_count: 1 document date: 2025-07-02

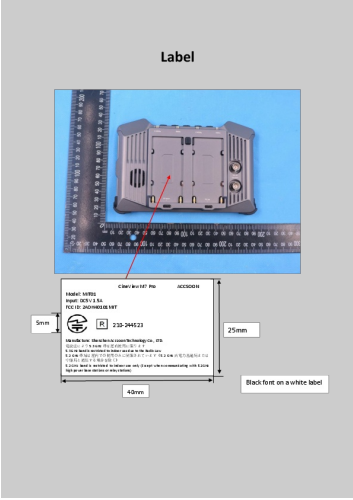

[pdf] Label


label Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2A0H40101MIT 0101mit
Label 5mm CineView M7 Pro Model: MIT01 Input: DC5V 1.5A FCC ID: 2A0H40101MIT ACCSOON 210-244523 Manufacture: Shenzhen Accsoon Technology Co., LTD. 5.3 GHz 5.3 GHz band is restricted to indoor use due to the Radio Law 5.2 GHz 5.2 GHz 5.2 GHz band is restricted to indoor use only Except when ...
lang:en score:43 filesize: 276.44 K page_count: 1 document date: 2025-06-13

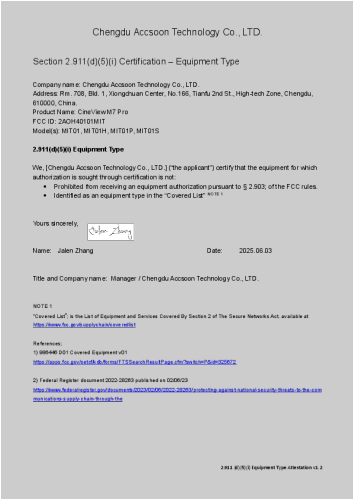

[pdf]

dell990 2 911 d 5 i CertificationEquipmentTypeev1 Chengdu Accsoon Technology Co LTD 0101MIT
CineView M7 Pro 2AOH40101MIT 0101mit

Chengdu Accsoon Technology Co., LTD. Section 2.911 d 5 i Certification Equipment
Type Company name: Chengdu Accsoon Technology Co., LTD. Address: Rm. 708,
Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu,
610000, China. Product Name: CineView M7 Pro FCC ID: 2AOH40101MI...
lang:en score:43 filesize: 163.65 K page_count: 1 document date: 2025-07-02

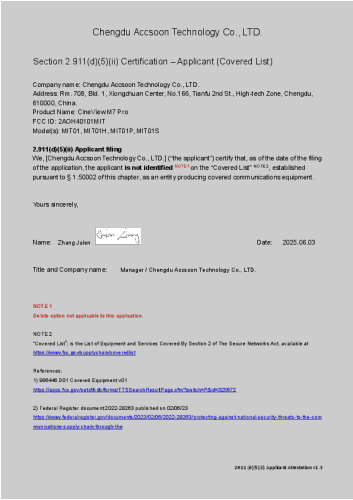

[pdf]

dell990 2 911 d 5 ii CertificationApplicantv1 3 Chengdu Accsoon Technology Co LTD 0101MIT CineView
M7 Pro 2AOH40101MIT 0101mit


Chengdu Accsoon Technology Co., LTD. Section 2.911 d 5 ii Certification Applicant
Covered List Company name: Chengdu Accsoon Technology Co., LTD. Address: Rm.
708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu,
610000, China. Product Name: CineView M7 Pro FCC ID: 2...
lang:en score:43 filesize: 144.85 K page_count: 1 document date: 2025-07-02



[pdf]

dell990 2 911 d 7 USAgentforServiceofProcessv1 4 Chengdu Accsoon Technology Co LTD 0101MIT
CineView M7 Pro 2AOH40101MIT 0101mit


AOGES CO., LIMITED Section 2.911 d 7 USA Agent for Service of Process Company
name: Chengdu Accsoon Technology Co., LTD. Address: Rm. 708, Bld. 1,
Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, 610000,
China. Product Name: CineView M7 Pro FCC ID: 2AOH40101MIT Model s : MIT01,
...
lang:en score:42 filesize: 156.95 K page_count: 2 document date: 2025-07-02

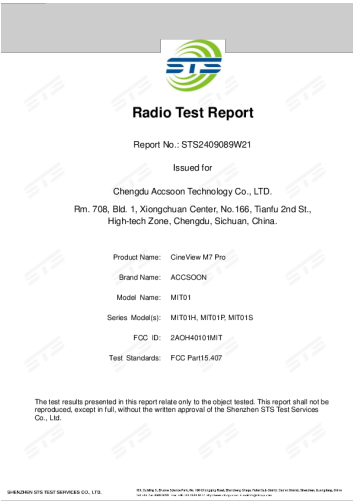

[pdf] Test Report

DFS WIFI Part 15 407 2 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2A0H40101MIT 0101mit

Radio Test Report Report No.: STS2409089W21 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S...
lang:en score:42 filesize: 3.48 M page_count: 88 document date: 2025-07-10

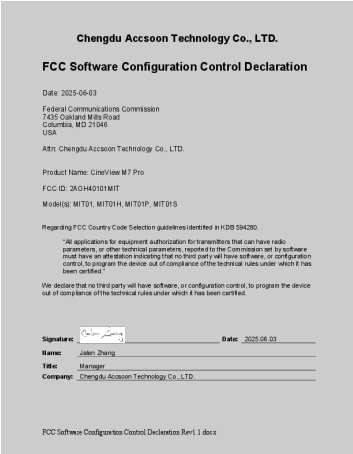


[pdf] Declaration of Conformity

5600 5650 MHz Transmission Restriction Clinton Bradley FCC Software Configuration Control Declaration Rev1 1 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2A0H40101MIT 0101mit
Chengdu Accsoon Technology Co., LTD. FCC Software Configuration Control Declaration Date: 2025-06-03 Federal Communications Commission 7435 Oakland Mills Road Columbia, MD 21046 USA Attn: Chengdu Accsoon Technology Co., LTD. Product Name: CineView M7 Pro FCC ID: 2A0H40101MIT Model s : MIT01, MIT01H,...
lang:en score:41 filesize: 132.52 K page_count: 1 document date: 2025-07-02



[pdf] Test Report

Measurement Report Kent BT Part 15 247 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2A0H40101MIT 0101mit
Radio Test Report Report No.:STS2409089W16 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S
...
lang:en score:39 filesize: 5.41 M page_count: 95 document date: 2025-07-08

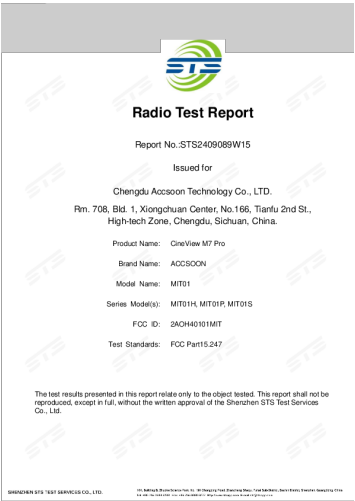

[pdf] Test Report

Measurement Report Kent BLE 5 0 Part 15 247 Chengdu Accsoon Technology Co LTD 0101MIT

CineView M7 Pro 2AOH40101MIT 0101mit

Radio Test Report Report No.:STS2409089W15 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S

...
lang:en score:38 filesize: 3.7 M page_count: 73 document date: 2025-07-08




[pdf] Test Report

Measurement Report Kent Part 15 247 WLAN 1 Chengdu Accsoon Technology Co LTD 0101MIT

CineView M7 Pro 2AOH40101MIT 0101mit

Radio Test Report Report No.:STS2409089W13 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S

...
lang:en score:38 filesize: 2.45 M page_count: 65 document date: 2025-07-11

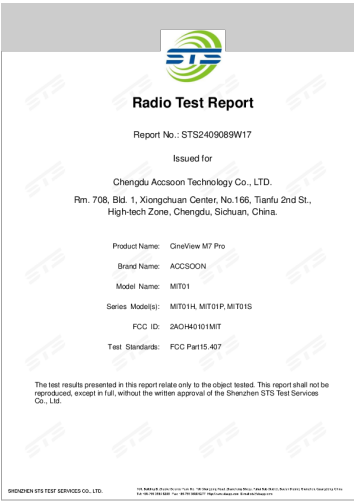

[pdf] Test Report

Measurement Report Kent 5G WIFI PART 15 407 Chengdu Accsoon Technology Co LTD 0101MIT

CineView M7 Pro 2AOH40101MIT 0101mit

Radio Test Report Report No.: STS2409089W17 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S...

lang:en score:36 filesize: 2.91 M page_count: 59 document date: 2025-07-08



Radio Test Report

Report No.: STS2409089W14

Issued for

Chengdu Accsoon Technology Co., LTD.

Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China.

Product Name: CineView M7 Pro

Brand Name: ACCSOON

Model Name: MIT01

Series Model(s): MIT01H, MIT01P, MIT01S

FCC ID: 2A0H40101MIT

Test Standards: FCC Part15.407

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

SHENZHEN STS TEST SERVICES CO., LTD.

101 SHENZHEN SHENYUAN ROAD, 10101 SHENZHEN, CHINA
101 SHENZHEN SHENYUAN ROAD, 10101 SHENZHEN, CHINA
101 SHENZHEN SHENYUAN ROAD, 10101 SHENZHEN, CHINA
101 SHENZHEN SHENYUAN ROAD, 10101 SHENZHEN, CHINA

[pdf] Test Report

Measurement Report Kent 5G WIFI PART 15 407 Chengdu Accsoon Technology Co LTD 0101MIT
CineView M7 Pro 2A0H40101MIT 0101mit

Radio Test Report Report No.: STS2409089W14 Issued for Chengdu Accsoon Technology Co., LTD. Rm. 708, Bld. 1, Xiongchuan Center, No.166, Tianfu 2nd St., High-tech Zone, Chengdu, Sichuan, China. Product Name: CineView M7 Pro Brand Name: ACCSOON Model Name: MIT01 Series Model s : MIT01H, MIT01P, MIT01S...
lang:en score:33 filesize: 4.19 M page_count: 81 document date: 2025-07-08

Chengdu Accsoon Technology Co., LTD.

Office of Engineering Technology
Federal Communications Commission
7435 Oakland Mills Road
Columbia, MD 21046
USA

Subject: Request for Confidentiality
FCC ID: 2A0H40101MIT

Date: 2025-06-03

To Whom It May Concern,

Pursuant to the provisions of the Commission's rules Title 47 Sections 90.407 and 90.409, we are requesting the Commission to withhold the following attachment(s) as confidential documents from public disclosure mark them:

These documents contain detailed system and equipment descriptions and are considered as proprietary information in operation of the equipment. The public disclosure of these documents might be harmful to our company and would give competitors an unfair advantage in the market.

☒ Schematic Diagram
☒ Block Diagram
☒ Parts List
☒ Operational Description
☒ Assembly Procedures
☒ SOFTWARE SECURITY REQUIREMENTS FOR UWB DEVICES

In addition to above mentioned documents, in order to comply with the marketing regulations in Title 47 CFR 92.603 and the importation rules in Title 47 CFR 92.1204, while ensuring that business sensitive information remains confidential until the actual marketing (whereby authorized dealers, we request Short Term Confidentiality of the following attachment(s):

☒ External Photos
☒ Test Setup Photos
☒ Internal Photos
☒ User Manual

☐ For 47 CFR 92.603 and Public Notice DA 04-1705.
OR
☒ For 47 CFR 92.603 and 47 CFR 92.1201
It is our understanding that all measurement test reports, FCC ID label format and correspondence during the certification process cannot be granted as confidential documents and this information will be available for public review once the grant of equipment authorization is issued.

Sincerely,

Signature:  Date: 2025-06-03

Name: Adam Zhang
Title: Manager
Company: Chengdu Accsoon Technology Co., LTD.

[pdf] Confidentiality Request Letter

Fiona Ffuellenbach FCC Short Long Term Confidentiality Request Rev4 1 ULCC52 497 8562925

Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2A0H40101MIT 0101mit
Chengdu Accsoon Technology Co., LTD. Office of Engineering Technology Federal Communications Commission 7435 Oakland Mills Road Columbia, MD 21046 USA
Subject; Request for Confidentiality FCC ID: 2A0H40101MIT Date: 2025-06-03 To Whom It May Concern, Pursuant to the provisions of the Commission s ...
lang:en score:26 filesize: 119.86 K page_count: 1 document date: 2025-07-02

DONGGUAN HUANGJIE COMMUNICATION TECHNOLOGY CO., LTD.

SPECIFICATION FOR APPROVAL

CUSTOMER _____

CUS. CODE _____

CUS. MODEL _____

HJ Tech CODE 3N0301BK-085

PRO. NAME _____

SPECIFICATION DESCRIPTION _____

DATE 2024/11/22

/ SUPPLIER		
PREPARED	CHECKER	APPROVER
S. No.		
CUSTOMER		
TRANSMITTER	CHECKER	APPROVER

[pdf] Specifications

Administrator ANT Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro 2A0H40101MIT
0101mit

DONGGUAN HUANGJIE COMMUNICATION TECHNOLOGY CO., LTD.
SPECIFICATION FOR APPROVAL CUSTOMER CUS. CODE CUS. MODEL HJ-Tech CODE 3N0301BK-085 PRO. NAME Internal Antenna SPECIFICATION Built in antenna, 0D1.13 double tin wire black, P1 end soldered DESCRIPTION PCB 2YP218 , P2 end riveted MHF-1-PLUG...

lang:tl score:18 filesize: 979.74 K page_count: 7 document date: 2024-11-22

Report

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (MHz)
NVNT	a	5500	Ant1	73.15	1.36	0.73
NVNT	a	5580	Ant1	73.15	1.36	0.73
NVNT	a	5700	Ant1	73.15	1.36	0.73
NVNT	a	5500	Ant2	73.15	1.36	0.73
NVNT	a	5580	Ant2	73.15	1.36	0.73
NVNT	a	5700	Ant2	73.15	1.36	0.73
NVNT	n20	5500	Sum	71.82	1.44	0.78
NVNT	n20	5580	Sum	71.73	1.44	0.78
NVNT	n20	5700	Sum	71.82	1.44	0.78
NVNT	n40	5510	Sum	55.91	2.53	1.58
NVNT	n40	5590	Sum	55	2.52	1.57
NVNT	n40	5670	Sum	55.91	2.53	1.58

[pdf]

WCB Appendix 5G WIFI U NII 2C Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit
Report 1. Duty Cycle Condition NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a a a n20 n20 n20 n40 n40 n40 Frequency MHz 5500 5580 5700 5500 5580 5700 5500 5580 5700 5510 5550 5670 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 Sum Sum Sum Sum Sum Sum Sum Sum Duty Cycle 73.15 73....
lang:es score:17 filesize: 2.9 M page_count: 47 document date: 2025-06-30

Report No.: TR_ST52409089W14_Appendix 5G WIFI U NII 2C

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (MHz)
NVNT	a	5500	Ant1	73.15	1.36	0.73
NVNT	a	5580	Ant1	73.11	1.36	0.73
NVNT	a	5700	Ant1	73.15	1.36	0.73
NVNT	a	5500	Ant2	73.15	1.36	0.73
NVNT	a	5580	Ant2	73.15	1.36	0.73
NVNT	a	5700	Ant2	73.15	1.36	0.73
NVNT	n20	5500	Sum	71.82	1.44	0.78
NVNT	n20	5580	Sum	71.73	1.44	0.78
NVNT	n20	5700	Sum	71.82	1.44	0.78
NVNT	n40	5510	Sum	55.91	2.53	1.58
NVNT	n40	5590	Sum	55.91	2.53	1.58
NVNT	n40	5670	Sum	55.91	2.53	1.58

[pdf]

WCB Appendix 5G WIFI U NII 2C Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit
Report No.: TR_ST52409089W14_Appendix 5G WIFI U-NII-2C 1. Duty Cycle Condition NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a a a n20 n20 n20 n40 n40 n40 Frequency MHz 5500 5580 5700 5500 5580 5700 5510 5550 5670 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 ...
lang:fr score:17 filesize: 2.38 M page_count: 47 document date: 2025-04-23

Report No.:ST52409089W14_Appendix 5G WIFI U NII 1

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (MHz)
NVNT	a	5180	Ant1	73.13	1.36	0.73
NVNT	a	5200	Ant1	73.16	1.36	0.73
NVNT	a	5240	Ant1	73.16	1.36	0.73
NVNT	a	5180	Ant2	73.13	1.36	0.73
NVNT	a	5200	Ant2	73.13	1.36	0.73
NVNT	a	5240	Ant2	73.13	1.36	0.73
NVNT	n20	5180	Sum	71.81	1.44	0.78
NVNT	n20	5200	Sum	71.83	1.44	0.78
NVNT	n20	5240	Sum	71.81	1.44	0.78
NVNT	n40	5190	Sum	55.93	2.52	1.58
NVNT	n40	5230	Sum	55.93	2.52	1.58

[pdf]

WCB Appendix 5G WIFI U NII 1 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit
Report No.:STS2409089W14_Appendix 5G WIFI U-NII-1 1. Duty Cycle Condition NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a a a n20 n20 n20 n40 n40 Frequency MHz 5180 5200 5240 5180 5200 5240 5180 5200 5240 5190 5230 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 Sum Sum Sum Sum Sum...
lang:fr score:17 filesize: 2.12 M page_count: 43 document date: 2025-04-23

Report

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (MHz)
NVNT	a	5180	Ant1	73.16	1.36	0.73
NVNT	a	5200	Ant1	73.16	1.36	0.73
NVNT	a	5240	Ant1	73.16	1.36	0.73
NVNT	a	5180	Ant2	73.16	1.36	0.73
NVNT	a	5200	Ant2	73.16	1.36	0.73
NVNT	a	5240	Ant2	73.16	1.36	0.73
NVNT	n20	5180	Sum	71.81	1.44	0.79
NVNT	n20	5200	Sum	71.81	1.44	0.79
NVNT	n20	5240	Sum	71.8	1.44	0.79
NVNT	n40	5180	Sum	55.98	2.53	1.58
NVNT	n40	5200	Sum	55.99	2.52	1.58

[pdf]

WCB ppendix 5G WIFI U NII 1 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit

Report 1. Duty Cycle Condition NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT
NVNT NVNT NVNT Mode a a a a a n20 n20 n20 n40 n40 Frequency MHz 5180
5200 5240 5180 5200 5240 5180 5200 5240 5190 5230 Antenna Ant1 Ant1 Ant1 Ant2
Ant2 Ant2 Sum Sum Sum Sum Sum Sum Duty Cycle 73.16 73.16 73.16 73.16 73....

lang:es score:17 filesize: 2.63 M page_count: 43 document date: 2025-06-30

Report No.: STS2409089W14 _Appendix 5G WIFI U NII-3

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (MHz)
NVNT	a	5745	Ant1	73.13	1.36	0.73
NVNT	a	5785	Ant1	73.13	1.36	0.73
NVNT	a	5825	Ant1	73.13	1.36	0.73
NVNT	a	5745	Ant2	73.09	1.58	0.73
NVNT	a	5785	Ant2	73.13	1.36	0.73
NVNT	a	5825	Ant2	73.15	1.36	0.73
NVNT	n20	5745	Sum	71.79	1.44	0.78
NVNT	n20	5785	Sum	71.79	1.44	0.78
NVNT	n20	5825	Sum	71.77	1.44	0.79
NVNT	n40	5745	Sum	55.91	2.53	1.58
NVNT	n40	5795	Sum	55.93	2.52	1.58

[pdf]

WCB Appendix 5G WIFI U NII 3 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit

Report No.: STS2409089W14 _Appendix 5G WIFI U-NII-3 1. Duty Cycle Condition
NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a
a a a n20 n20 n20 n40 n40 Frequency MHz 5745 5785 5825 5745 5785 5825 5745
5785 5825 5755 5795 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 Sum Sum Sum Sum
Su...

lang:fr score:17 filesize: 2.63 M page_count: 43 document date: 2025-06-30

Report No.: STS2409089W14 _Appendix 5G WIFI U NII-2A

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (MHz)
NVNT	a	5260	Ant1	73.15	1.36	0.73
NVNT	a	5300	Ant1	73.15	1.36	0.73
NVNT	a	5320	Ant1	73.15	1.36	0.73
NVNT	a	5260	Ant2	73.15	1.36	0.73
NVNT	a	5300	Ant2	73.15	1.36	0.73
NVNT	a	5320	Ant2	73.15	1.36	0.73
NVNT	n20	5260	Sum	71.73	1.44	0.78
NVNT	n20	5300	Sum	71.82	1.44	0.79
NVNT	n20	5320	Sum	71.82	1.44	0.78
NVNT	n40	5270	Sum	55.91	2.53	1.58
NVNT	n40	5310	Sum	55.91	2.53	1.58

[pdf]

WCB Appendix 5G WIFI U NII 2A Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit

Report No.: STS2409089W14 _Appendix 5G WIFI U-NII-2A 1. Duty Cycle Condition
NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a
a a a n20 n20 n20 n40 n40 Frequency MHz 5260 5300 5320 5260 5300 5320 5260
5300 5320 5270 5310 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 Sum Sum Sum Sum
S...

lang:fr score:17 filesize: 2.12 M page_count: 43 document date: 2025-04-23

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1-T/M Ratio
NVNT	a	5200	Ant1	73.11	1.56	0.73
NVNT	a	5200	Ant1	73.15	1.36	0.73
NVNT	a	5200	Ant1	73.15	1.36	0.73
NVNT	a	5200	Ant2	73.16	1.36	0.73
NVNT	a	5300	Ant2	73.15	1.36	0.73
NVNT	a	5300	Ant2	73.15	1.36	0.73
NVNT	n20	5200	Sum	71.82	1.44	0.78
NVNT	n20	5300	Sum	71.82	1.44	0.78
NVNT	n50	5200	Sum	71.7	2.42	0.87
NVNT	n50	5300	Sum	71.81	2.03	1.68
NVNT	n40	5310	Sum	55.99	1.57	1.59

[\[pdf\]](#)

WCB Appendix 5G WIFI U NII 2A Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit

Report 1. Duty Cycle Condition NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a a a n20 n20 n20 n40 n40 Frequency MHz 5260 5300 5320 5260 5300 5320 5260 5300 5320 5270 5310 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 Sum Sum Sum Sum Sum Duty Cycle 73.11 73.15 73.15 73.16 73....
lang:es score:17 filesize: 2.6 M page_count: 43 document date: 2025-06-30

Report						
1. Duty Cycle						
Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1-T Metric
NWnt	a	5785	Ant1	73.19	1.36	0.73
NWnt	a	5625	Ant1	73.15	1.36	0.73
NWnt	a	5745	Ant2	73.05	1.56	0.73
NWnt	a	5785	Ant2	73.09	1.36	0.73
NWnt	a	5625	Ant2	73.15	1.36	0.73
NWnt	n20	5745	Sum	71.79	1.44	0.78
NWnt	n20	5885	Sum	71.79	1.44	0.78
NWnt	n50	5625	Sum	71.79	1.44	0.78
NWnt	n40	5735	Sum	55.80	2.52	1.58
NWnt	n40	5795	Sum	55.80	2.52	1.58

[\[pdf\]](#)

WCB Appendix 5G WIFI U NII 3 Chengdu Accsoon Technology Co LTD 0101MIT CineView M7 Pro
2AOH40101MIT 0101mit

Report 1. Duty Cycle Condition NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT NVNT Mode a a a a a n20 n20 n20 n40 n40 Frequency MHz 5745 5785 5825 5745 5785 5825 5745 5785 5825 5755 5795 Antenna Ant1 Ant1 Ant1 Ant2 Ant2 Ant2 Sum Sum Sum Sum Sum Duty Cycle 73.09 73.11 73.15 73.09 73....
lang:es score:17 filesize: 2.62 M page_count: 43 document date: 2025-06-30

[illegible]

[\[pdf\]](#)

Measurement Report Kent Part 15 247 WLAN 2 Chengdu Accsoon Technology Co LTD 0101MIT
CineView M7 Pro 2AOH40101MIT 0101mit

4. -6dB Bandwidth Condition Mode Frequency MHz NVNT b 2412 NVNT b 2437
NVNT b 2462 NVNT b 2412 NVNT b 2437 NVNT b 2462 NVNT g 2412 NVNT g 2437
NVNT g 2462 NVNT g 2412 NVNT g 2437 NVNT g 2462 NVNT n20 2412 NVNT n20
2412 NVNT n20 2437 NVNT n20 2437 NVNT...

lang:en score:16 filesize: 4.73 M page_count: 69 document date: 2025-07-11