

## Aiandcc M8

# Aiandcc M8 MP3 Player Instruction Manual

Model: M8 | Brand: Aiandcc

## 1. PRODUCT OVERVIEW

---

The Aiandcc M8 MP3 Player is a compact and portable device designed for high-fidelity music playback. It features a 1.77-inch TFT color screen for clear content display and comes with a built-in 32GB memory, expandable via a TF card. Equipped with Bluetooth 5.3, it offers stable and low-latency wireless audio. Its durable design includes a sports clip and an armband, making it suitable for various activities.

- **Compact Design:** Measuring 2.32 x 1.56 x 0.67 inches and weighing 31g, it is highly portable.
- **Display:** 1.77-inch TFT color screen for easy navigation.
- **Storage:** 32GB internal memory, supporting over 1,000 songs. Expandable up to 128GB with a TF card (not included).
- **Bluetooth 5.3:** Provides a stable connection up to 20 meters with low interference, ideal for wireless headphones and speakers.
- **Extended Battery Life:** Up to 34 hours with wired headphones, approximately 11 hours in Bluetooth mode. Charges fully in 2.5 hours.
- **Sports-Ready:** Features a secure built-in clip and includes an armband for active use.
- **Wide File Support:** Compatible with mainstream audio formats including MP3, WMA, and APE.
- **Customizable Audio:** Built-in professional equalizer with multiple sound modes.



*Image: Front and side view of the Aiandcc M8 MP3 Player, highlighting its compact size and integrated clip.*

## 2. WHAT'S INCLUDED

---

Please check the package contents to ensure all items are present:

- Aiandcc M8 MP3 Player
- Wired Headphones
- Type-C USB Cable
- Armband


## Armband:

Slip on the armband, and your music goes wherever you do—hit the gym, hike, or dash through your day. No fumbling, no hassle—just tunes, always in reach.



## Bluetooth:

Cut the cords. Seamlessly pair with your Bluetooth speakers or headsets, and let the music flow free. Wireless, effortless, endless enjoyment.

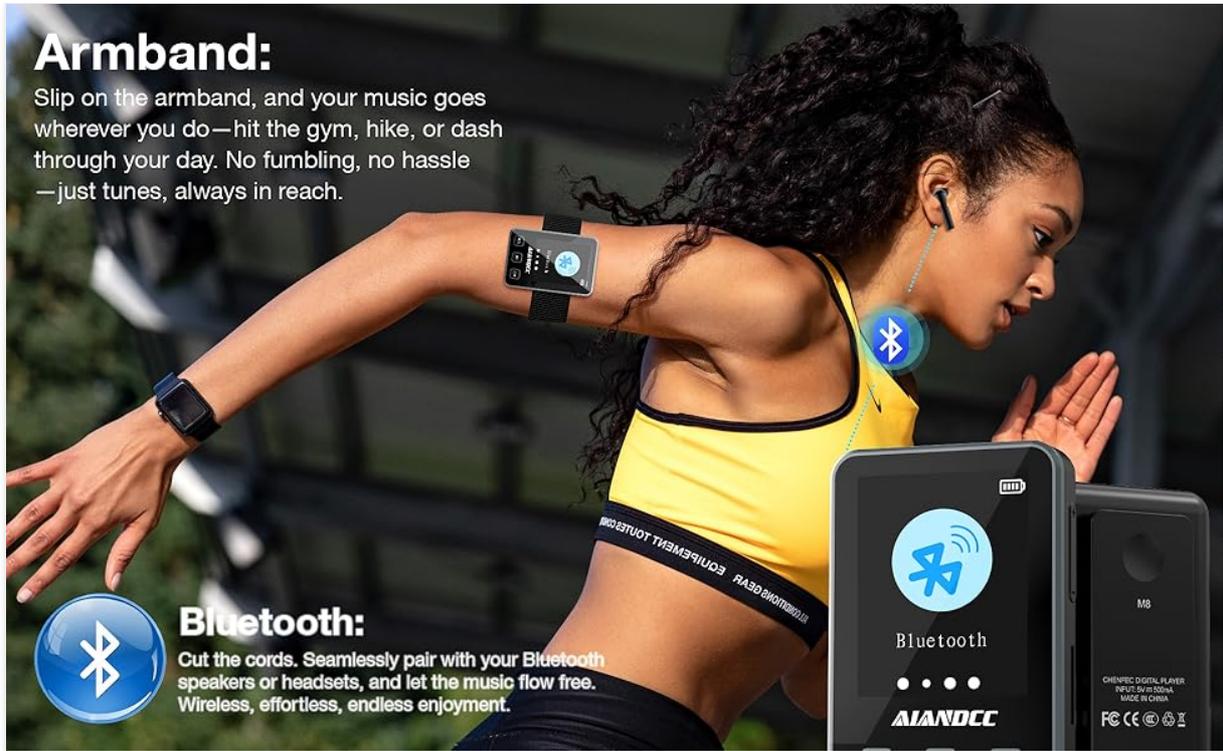

*Image: All components included in the Ailandcc M8 MP3 Player package.*

### 3. DEVICE LAYOUT AND CONTROLS

---

# Bluetooth 5.3 connection

Boasting wider, more stable transmission (10-meter lossless range), it easily pairs with your Bluetooth headphones, speakers, and car.



Image: Detailed diagram of the MP3 player's buttons and ports.

## Button Functions:

- **Left Button:** Short press for previous song; long press to return to the previous menu.
- **Center Button:** Integrates Play/Pause functionality and confirms selections.
- **Right Button:** Short press for next song; long press to access the submenu.
- **Side '+' Button:** Short press to increase volume; long press for fast forward during playback.
- **Side '-' Button:** Short press to decrease volume; long press for fast rewind during playback.

## Ports and Features:

- **Headphone Jack:** Standard 3.5mm port for wired headphones.
- **Power On/Off Button:** Located on the side for device power control.
- **USB C Charging Port:** For charging and data transfer.
- **TF Card Slot:** For expanding storage with a Micro SD card.
- **Built-in Clip:** For attaching the player to clothing or the armband.

## 4. SETUP GUIDE

---

## 4.1 Charging the Device

Before first use, fully charge your MP3 player. Connect the included Type-C USB cable to the player's charging port and plug the other end into a USB power adapter (not included) or a computer's USB port. The device will fully charge in approximately 2.5 hours.



Image: The MP3 player connected for Type-C charging.

## 4.2 Power On/Off

To power on the device, press and hold the Power On/Off button located on the side. To power off, press and hold the same button until the screen shuts down.

## 4.3 Language Selection

Upon first startup or after a factory reset, you may be prompted to select a language. Use the navigation buttons to scroll through the options and the center button to confirm your selection.

## 4.4 Transferring Music Files

Connect the MP3 player to your computer using the provided USB cable. The device will be recognized as a removable storage drive. You can then drag and drop your compatible audio files (MP3, WMA, APE) directly into the player's internal storage or onto an inserted TF card. No special software is required for file transfer.

# 5. OPERATING INSTRUCTIONS

## 5.1 Basic Music Playback

1. From the main menu, navigate to the 'Music' icon and press the center button to enter.
2. Select 'All songs' or browse by 'Artists', 'Albums', 'Genres', or 'Playlists'.
3. Use the navigation buttons to select a song and press the center button to play.
4. During playback, use the left button for the previous track and the right button for the next track.
5. Press the center button to pause or resume playback.

## 5.2 Volume Adjustment

Use the side '+' button to increase the volume and the side '-' button to decrease it.

## 5.3 Bluetooth Pairing

1. From the main menu, select the 'Bluetooth' icon.
2. Ensure your Bluetooth headphones or speaker are in pairing mode.
3. The player will scan for available devices. Select your device from the list and confirm to pair.
4. Once paired, audio will be routed wirelessly to your connected device.

## 5.4 Equalizer Settings

The player includes a professional equalizer. Access it through the settings or submenu during playback to choose from various sound modes or customize your audio experience.

## 5.5 Using the Sports Clip and Armband

The built-in clip allows you to securely attach the MP3 player to your clothing, such as a collar, sleeve, or waistband. For more active use, slide the player into the included armband and wear it on your arm. This ensures the device stays secure during activities like jogging, training, or cycling.

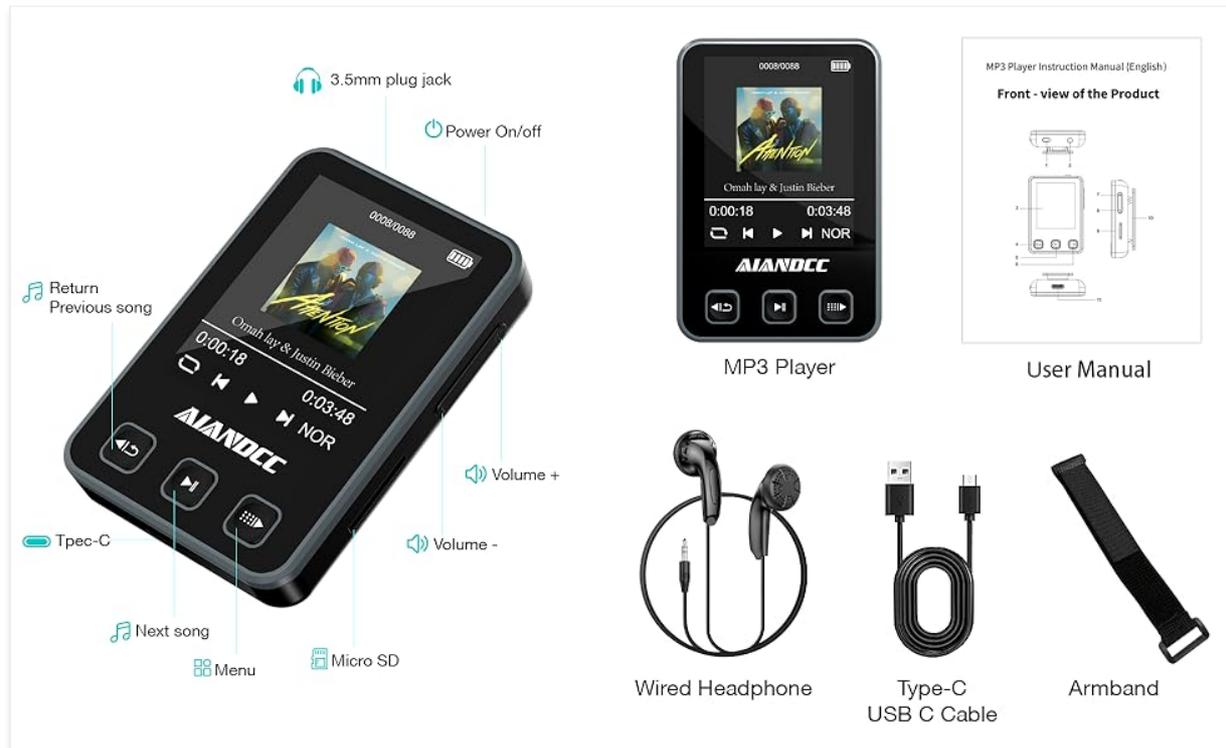


Image: Examples of wearing the MP3 player using its clip and armband during physical activity.

## 6. MAINTENANCE

To ensure the longevity and optimal performance of your Aiandcc M8 MP3 Player, please follow these maintenance guidelines:

- **Keep Dry:** Avoid exposing the device to water or excessive moisture.
- **Cleaning:** Use a soft, dry cloth to clean the exterior of the player. Do not use harsh chemicals or abrasive materials.
- **Temperature:** Store and operate the device within recommended temperature ranges. Avoid extreme heat or cold.
- **Handling:** Handle the player with care to prevent drops or impacts.

- **Disassembly:** Do not attempt to disassemble or repair the device yourself, as this will void the warranty.

## 7. TROUBLESHOOTING

---

If you encounter any issues with your Aiandcc M8 MP3 Player, please refer to the following common problems and solutions:

- **Device Not Turning On:** Ensure the battery is sufficiently charged. Connect the player to a power source using the USB-C cable and allow it to charge for at least 15 minutes before attempting to power it on again.
- **Cannot Transfer Files:** Verify that the USB cable is securely connected to both the player and your computer. Ensure the audio files you are attempting to transfer are in a compatible format (MP3, WMA, APE). Try restarting both the player and your computer.
- **Bluetooth Connection Issues:** Make sure both the MP3 player and your Bluetooth headphones/speaker are in pairing mode and within the effective range (up to 20 meters without obstructions). Try unpairing and re-pairing the devices.
- **Poor Sound Quality:** Check if your wired headphones are fully plugged into the 3.5mm jack. If using Bluetooth, ensure a stable connection. Adjust the equalizer settings on the player to optimize sound.
- **Difficulty Navigating Menus:** Refer to the 'Device Layout and Controls' section (Section 3) for a detailed explanation of each button's function. Practice navigating through the menus to become familiar with the interface.

## 8. SPECIFICATIONS

---

Feature	Specification
Product Dimensions	2.4 x 0.69 x 1.6 inches
Item Weight	1.09 ounces (31g)
Screen Size	1.77 Inches TFT Color Screen
Memory Storage Capacity	32 GB (expandable up to 128GB via TF Card)
Connectivity Technology	Bluetooth 5.3
Special Feature	Built-In Clip
Compatible Devices	Headphones
Media Type	Micro SD
Battery Life (Wired)	Up to 34 hours
Battery Life (Bluetooth)	Approximately 11 hours
Charging Time	Approximately 2.5 hours

# Clip It Anywhere, Enjoy Freely

Our clip-on MP3 player is designed for active lifestyles

whether you attach it to your collar, sleeve, waistband, or bag strap, it stays securely in place. No slipping, no bouncing, just effortless music wherever you go.




Image: Key specifications including storage capacity and battery performance.

## 9. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the documentation provided with your purchase or contact Aiandcc customer service through the retailer's platform. Keep your proof of purchase for warranty claims.


### Related Documents - M8

	<p><a href="#">M8 Mobile Phone Selfie Monitor User Guide</a></p> <p>This guide provides information on the M8 Mobile Phone Selfie Monitor, including its features, specifications, and wireless connection instructions for screen mirroring and Bluetooth shutter functionality.</p>
	<p><a href="#">Dirtywave M8 Operation Manual: Your Guide to Portable Music Production</a></p> <p>Discover the full potential of the Dirtywave M8 with its official operation manual. Learn about its powerful sequencing, synthesis, effects, and sampling features for creating music anywhere.</p>



[BMW Safety Recall 23V-821: Transmission Mechatronics Replacement](#)

This document provides details on BMW Safety Recall 23V-821 concerning the replacement of transmission mechatronics in certain Model Year 2023 BMW vehicles due to potential issues with the Integrated Transmission Control Unit (ITCU).




[BOYHOM M8 4K HD Retro Game Console User Manual](#)

Comprehensive guide for the BOYHOM M8 4K HD Retro Game Console, detailing setup, operation, features like dual wireless controllers, 20,000+ retro games, and 64GB storage.



[HILTI MVA-Z Mounting System Installation Guide](#)

Step-by-step installation instructions for the HILTI MVA-Z mounting system, detailing bracket attachment, fastener specifications, and torque settings.



[DOUK AUDIO M8 Bluetooth 5.0 Tube Amplifier: User Guide & Specifications](#)

Comprehensive guide to the DOUK AUDIO M8 Bluetooth 5.0 Tube Amplifier, featuring 50W x 2 output, TPA3116 chip, and multiple input options. Includes setup instructions, warm tips, technical parameters, and contact information.