

[Manuals.plus](#) /

› [AOC](#) /

› AOC 22P2T 21.5-inch FHD VA Touch Monitor User Manual

AOC 22P2T

AOC 22P2T 21.5-inch FHD VA Touch Monitor User Manual

Model: 22P2T

[Introduction](#) [Safety](#) [Contents](#) [Setup](#) [Operation](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#)
[Warranty & Support](#)

1. INTRODUCTION

This manual provides essential information for the proper installation, operation, and maintenance of your AOC 22P2T 21.5-inch FHD VA Touch Monitor. Please read this manual thoroughly before using the product to ensure optimal performance and safety.



Image 1.1: The AOC 22P2T monitor, showcasing its design and key features like FHD, 60Hz, 4ms response, Adaptive Sync, 10-point touch, HDR mode, and HDMI connectivity.

2. SAFETY INFORMATION

Observe the following safety precautions to prevent damage to the monitor and ensure user safety:

- Do not expose the monitor to rain or moisture to avoid fire or shock hazards.
- Do not open the monitor casing. There are no user-serviceable parts inside. Refer all servicing to qualified personnel.
- Place the monitor on a stable, flat surface to prevent it from falling.
- Ensure proper ventilation around the monitor. Do not block ventilation openings.
- Use only the power adapter and cables supplied with the monitor.

- Disconnect the power plug from the outlet if the monitor will not be used for an extended period.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- AOC 22P2T Monitor
- Z-type Folding Stand
- Power Cable
- HDMI Cable
- USB Upstream Cable
- Quick Start Guide
- Warranty Card

4. SETUP

4.1 Unpacking

Carefully remove the monitor and all accessories from the packaging. Retain the packaging materials for future transport or storage.

4.2 Stand Assembly

Attach the Z-type folding stand to the monitor. Ensure it is securely fastened. The stand allows for flexible tilt adjustment from -5° to 90°.

COMFORT MEETS FLEXIBILITY

Foldable stand with wide tilt range



Image 4.1: The flexible Z-type folding stand, illustrating its adjustable tilt range for ergonomic comfort.

4.3 Connecting the Monitor

Connect the monitor to your computer and power source using the following steps:

1. **Power Connection:** Connect the power cable to the monitor's power input and then to a power outlet.
2. **Video Connection:** Connect one end of the HDMI, DisplayPort (DP), or DVI cable to the corresponding port on your computer's graphics card and the other end to the monitor. For optimal performance, HDMI or DisplayPort is recommended.
3. **USB Upstream Connection:** To enable the touchscreen functionality and USB 3.2 ports on the monitor, connect the USB upstream cable from the monitor to an available USB port on your computer.
4. **Audio Connection (Optional):** If using external speakers or headphones, connect them to the monitor's audio output jack. The monitor also has built-in 2W speakers.

AOC

ALL-IN-ONE HDR TOUCH DISPLAY 22P2T



60_{Hz}

4_{ms}

ADAPTIVE
SYNC



10 POINTS TOUCH



FLICKER FREE

HDR
MODE



ADJUSTABLE
STAND



HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

Image 4.2: Connectivity options on the AOC 22P2T monitor, including HDMI, DP, DVI, and USB 3.2 ports.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off

Press the power button located on the monitor to turn it on or off. The power indicator light will illuminate when the monitor is on.

5.2 Using the Touchscreen

The AOC 22P2T features a 10-point capacitive touchscreen. Ensure the USB upstream cable is connected to your computer for touch functionality. The touchscreen is compatible with Windows 11/10.

BRILLIANT TOUCHSCREEN DISPLAY

Responsive 10-point interaction built in



10 POINTS TOUCH

Image 5.1: A user interacting with the monitor's 10-point capacitive touchscreen.

5.3 On-Screen Display (OSD) Menu Navigation

Use the buttons on the monitor's bezel to access and navigate the On-Screen Display (OSD) menu. This menu allows you to adjust various display settings.

5.4 Adjusting Display Settings

Within the OSD menu, you can adjust settings such as:

- **Brightness/Contrast:** Adjust the overall luminance and contrast of the display.
- **Color Settings:** Modify color temperature, gamma, and individual RGB levels.
- **HDR Mode:** Activate HDR mode simulation for richer tones, brilliant highlights, and enhanced detail.
- **Low Blue Light Mode:** Reduce blue light emission to protect your eyes during extended use.
- **Clear Vision:** Enhance sharpness for low-resolution images.

ELEVATE YOUR VIEWING WITH HDR MODE

Richer tones, brilliant highlights,
and stunning detail

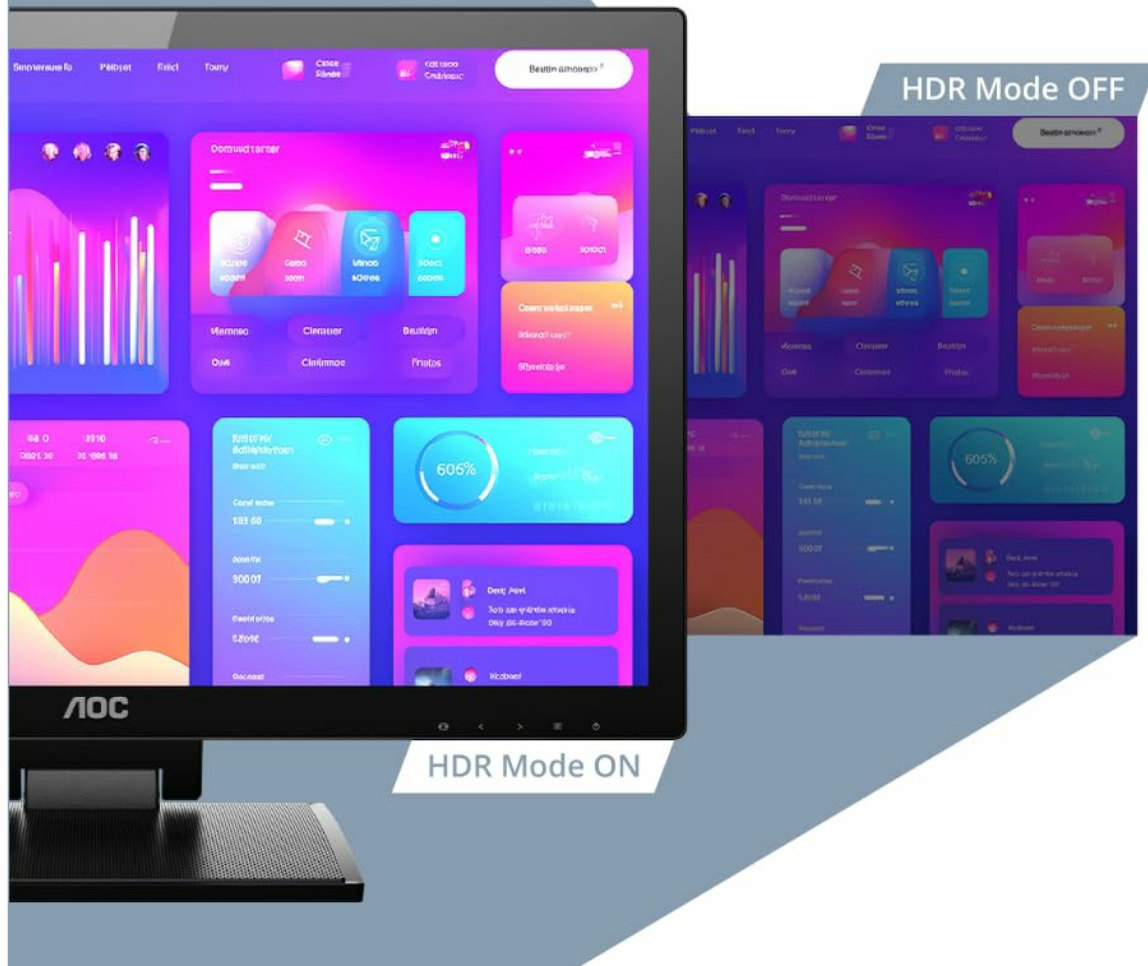


Image 5.2: Visual comparison of HDR mode off versus HDR mode on, demonstrating improved picture quality.

5.5 Using Built-in Speakers

The monitor includes dual 2W built-in speakers. Ensure your computer's audio output is directed to the monitor or connected via HDMI/DisplayPort for sound playback.

5.6 USB 3.2 Fast Charge Port

The yellow USB port on the monitor supports fast charging for mobile devices. Connect your device to this port using a compatible USB cable.

6. MAINTENANCE

6.1 Cleaning the Screen

To clean the screen, gently wipe it with a soft, lint-free cloth. For stubborn marks, lightly dampen the cloth with water or a non-abrasive screen cleaner. Do not spray cleaner directly onto the screen.

6.2 General Care

Keep the monitor away from direct sunlight, excessive heat, and extreme cold. Avoid placing heavy objects on the monitor or its cables. Do not use harsh chemicals or abrasive materials for cleaning any part of the monitor.

6.3 IP65 Water & Dustproof Information

The front panel of the AOC 22P2T monitor is IP65 rated, meaning it is protected against dust ingress and low-pressure water jets from any direction. This makes it suitable for environments where splashes or dust might occur. However, it is not designed for immersion in water.

7. TROUBLESHOOTING

If you encounter issues with your monitor, refer to the following common problems and solutions:

- **No Image on Screen:**
 - Ensure the power cable is securely connected and the monitor is turned on.
 - Verify that the video cable (HDMI, DP, DVI) is properly connected to both the monitor and the computer.
 - Check if the correct input source is selected in the monitor's OSD menu.
- **Touchscreen Not Responding:**
 - Confirm that the USB upstream cable is connected from the monitor to your computer.
 - Ensure your operating system (Windows 11/10) is properly configured for touch input.
 - Restart your computer.
- **Flickering or Distorted Image:**
 - Check the video cable for damage or loose connections.
 - Adjust the refresh rate in your computer's display settings.
 - Ensure the monitor's resolution is set to its native resolution (1920 x 1080).
- **No Sound from Built-in Speakers:**
 - Verify that the audio output on your computer is directed to the monitor.
 - Check the volume settings on both the monitor and your computer.
 - Ensure the HDMI or DisplayPort cable is used for video and audio transmission.

8. SPECIFICATIONS

Feature	Description
Brand	AOC

Model Name	22P2T
Screen Size	22 Inches (21.5-inch viewable)
Display Type	VA Panel, LCD
Resolution	Full HD (1920 x 1080 Pixels)
Aspect Ratio	16:9
Refresh Rate	75 Hz
Response Time	0.03 Milliseconds
Contrast Ratio	3000:1 (Static)
Dynamic Contrast Ratio	50M:1 (DCR)
Image Brightness	250 cd/m²
Viewing Angle	178 Degrees (H/V)
Touchscreen	10-Point Capacitive Touch
Connectivity	1x HDMI, 1x DisplayPort, 1x DVI, 1x USB 3.2 (Fast Charge)
Built-in Speakers	Dual 2W Speakers
Special Features	HDR Mode Simulation, DCB Color Boost, Clear Vision, Low Blue Light, IP65 Water & Dustproof (Front Panel)
Stand	Z-type Folding Bracket (Tilt: -5° to 90°)
Mounting Type	Wall Mount (VESA compatible)
Item Dimensions (DxWxH)	18.7D x 51.5W x 38.2H Centimeters
Item Weight	6090 Grams



Image 8.1: Overview of the AOC 22P2T monitor's key features and specifications.

9. WARRANTY AND SUPPORT

9.1 Warranty Information

The AOC 22P2T monitor comes with a **3 Years Manufacturer Warranty**. Please refer to the warranty card included in your package for detailed terms and conditions. Keep your purchase receipt as proof of purchase for warranty claims.

9.2 Customer Support

For technical assistance, service, or warranty inquiries, please contact AOC customer support. Contact details can typically be found on the AOC official website or on the warranty card provided with your product.

Manufacturer Contact Information:

TPV Technology India Pvt Ltd, TPV Display Technology (Wuhan) Co. Ltd., Unique No. 11, Zhuankou Development District of Economic Technological Development Zone, Wuhan City, P. R. China

Importer/Packer Contact Information:

TPV TECHNOLOGY INDIA PRIVATE LIMITED, 501-508, 5TH FLOOR BESTECH CHAMBERS, BLOCK B SEC 27, SUSHANT LOK 1 GURUGRAM – 122002

© 2026 AOC. All rights reserved. Information in this manual is subject to change without notice.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question