

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [MUBVIEW](#) /

› [MUBVIEW Bell J7 2K Wireless Video Doorbell Camera with Chime User Manual](#)

MUBVIEW Bell J7

MUBVIEW Bell J7 2K Wireless Video Doorbell Camera with Chime User Manual

Model: Bell J7

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your MUBVIEW Bell J7 2K Wireless Video Doorbell Camera with Chime. Please read this manual thoroughly before using the product to ensure proper function and safety. This device is designed to enhance your home security with advanced features like 2K video, motion detection, and two-way audio.

2. WHAT'S IN THE Box

Verify that all components are present before proceeding with installation:

- Camera Doorbell x1
- Chime x1
- User Manual x1
- Charging Cable x1
- Battery x3
- Other Accessories (screws, anchors, screwdriver)

IP66 Weather Resistance

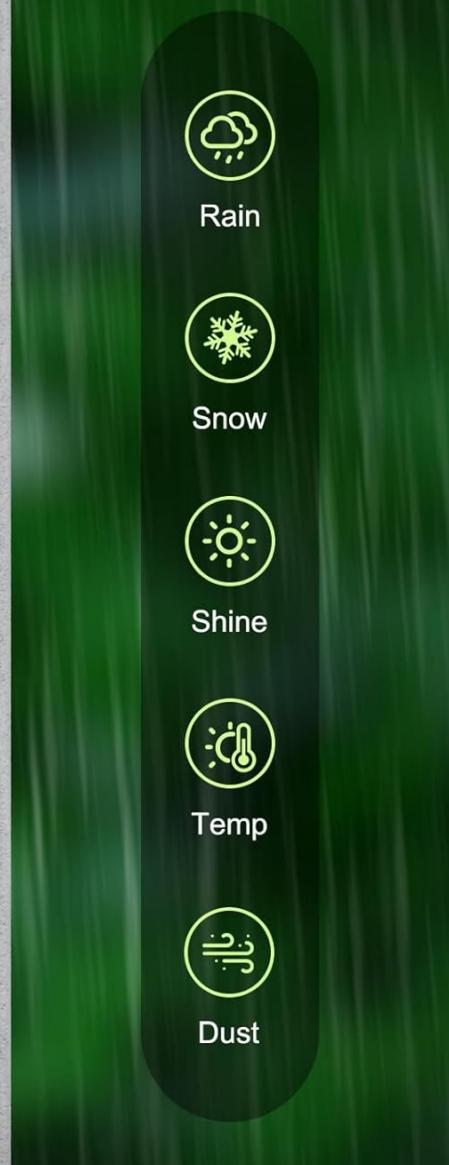


Image: Contents of the MUBVIEW Bell J7 package, including the doorbell, chime, and installation tools.

3. PRODUCT OVERVIEW

Familiarize yourself with the main parts of your video doorbell and chime:

Doorbell Camera

- **2K Camera Lens:** Captures high-resolution video.
- **PIR Motion Sensor:** Detects human movement.
- **Microphone:** For two-way audio communication.
- **Speaker:** For two-way audio communication and siren.
- **Doorbell Button:** Activates the chime and sends notifications.
- **Micro USB-C Port:** For charging the internal battery.
- **Reset Button:** For device reset.

- **Micro SD Card Slot:** For local video storage (up to 128GB, card not included).
- **Anti-Theft Button:** Triggers an alarm if the doorbell is removed from its mount.

Wireless Chime

- **Speaker:** Emits doorbell sound.
- **Volume Control:** Adjusts chime volume.
- **Tone Selector:** Changes chime melody.
- **Power Source:** Battery-powered for flexible placement.



Image: Front view of the MUBVIEW Bell J7 doorbell and chime.

4. SETUP

Follow these steps to set up your MUBVIEW Bell J7 doorbell camera:

4.1 Charging the Doorbell

1. Before first use, fully charge the doorbell camera using the provided USB charging cable.
2. The charging port is located on the side of the doorbell, protected by a rubber flap.
3. A full charge can last up to 180 days, depending on usage.

4.2 App Installation and Wi-Fi Connection

1. Download the **CloudEdge** or **MUBVIEW** app from your smartphone's app store (Apple App Store or Google Play Store).
2. Register for an account or log in if you already have one.
3. Ensure your smartphone is connected to a **2.4GHz Wi-Fi network**. The doorbell is not compatible with 5GHz Wi-Fi.
4. In the app, select "Add Device" and choose "Smart Video Doorbell".
5. Follow the on-screen prompts to connect the doorbell to your Wi-Fi network. This typically involves scanning a QR code displayed on your phone with the doorbell camera.
6. Once connected, you can name your device and complete the setup.

4.3 Mounting the Doorbell

The doorbell can be mounted using screws or strong adhesive tape (not included for all mounting types).

1. Attach the mounting bracket to your desired location on the wall or door frame. Ensure it is at an appropriate height for optimal viewing.
2. Secure the bracket using the provided screws and anchors.
3. Slide the doorbell camera into the mounting bracket until it clicks securely into place.
4. For added security, a small screw can be inserted from the bottom of the bracket into the doorbell to prevent easy removal.

No Wires Needed Smooth 2.4GHz Connection



Image: Installation of the MUBVIEW Bell J7 doorbell camera onto its mounting bracket.

5. OPERATING INSTRUCTIONS

5.1 Live View and Two-Way Audio

- Open the MUBVIEW app to access the live video feed from your doorbell camera.
- Use the microphone icon in the app to enable two-way audio and speak with visitors at your door.
- The voice changer feature can be activated for added privacy and security.

Two-way Audio & Voice Message

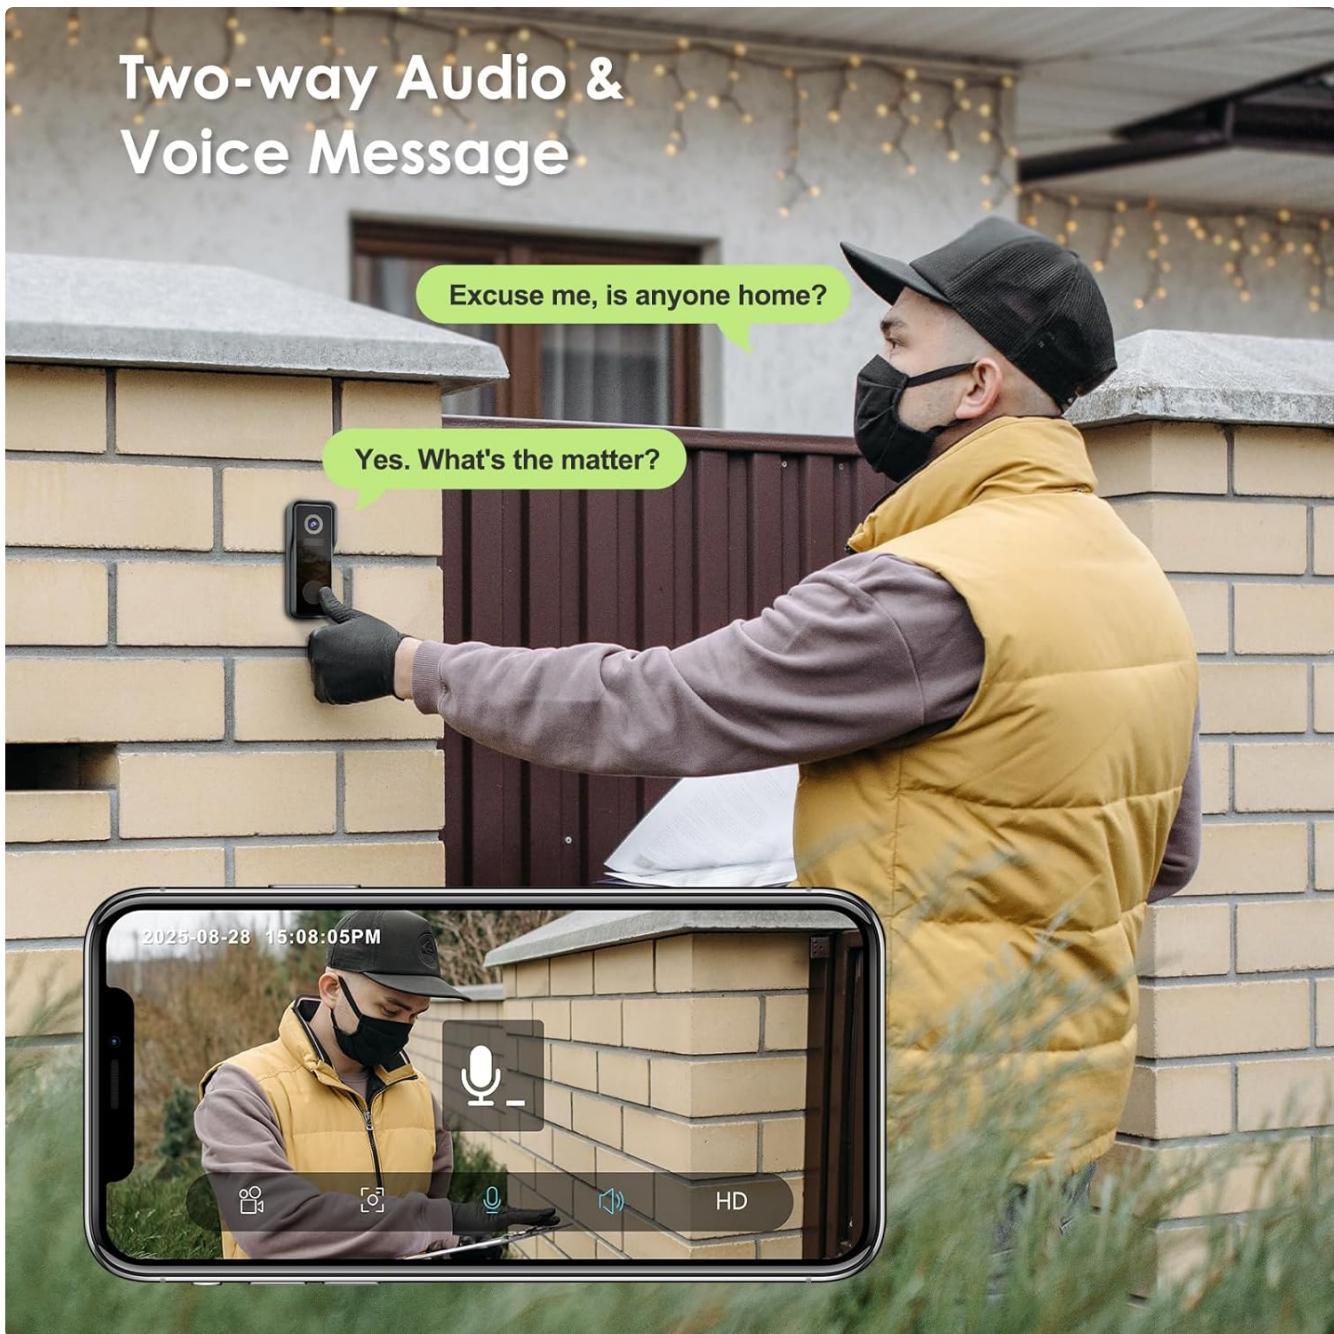


Image: Demonstrating two-way audio and voice message functionality via the app.

5.2 Motion Detection and Alerts

- The doorbell features advanced PIR motion and human detection to minimize false alarms.
- When motion is detected, you will receive instant push notifications on your smartphone.
- Adjust motion detection sensitivity and set custom motion zones within the app to suit your environment.

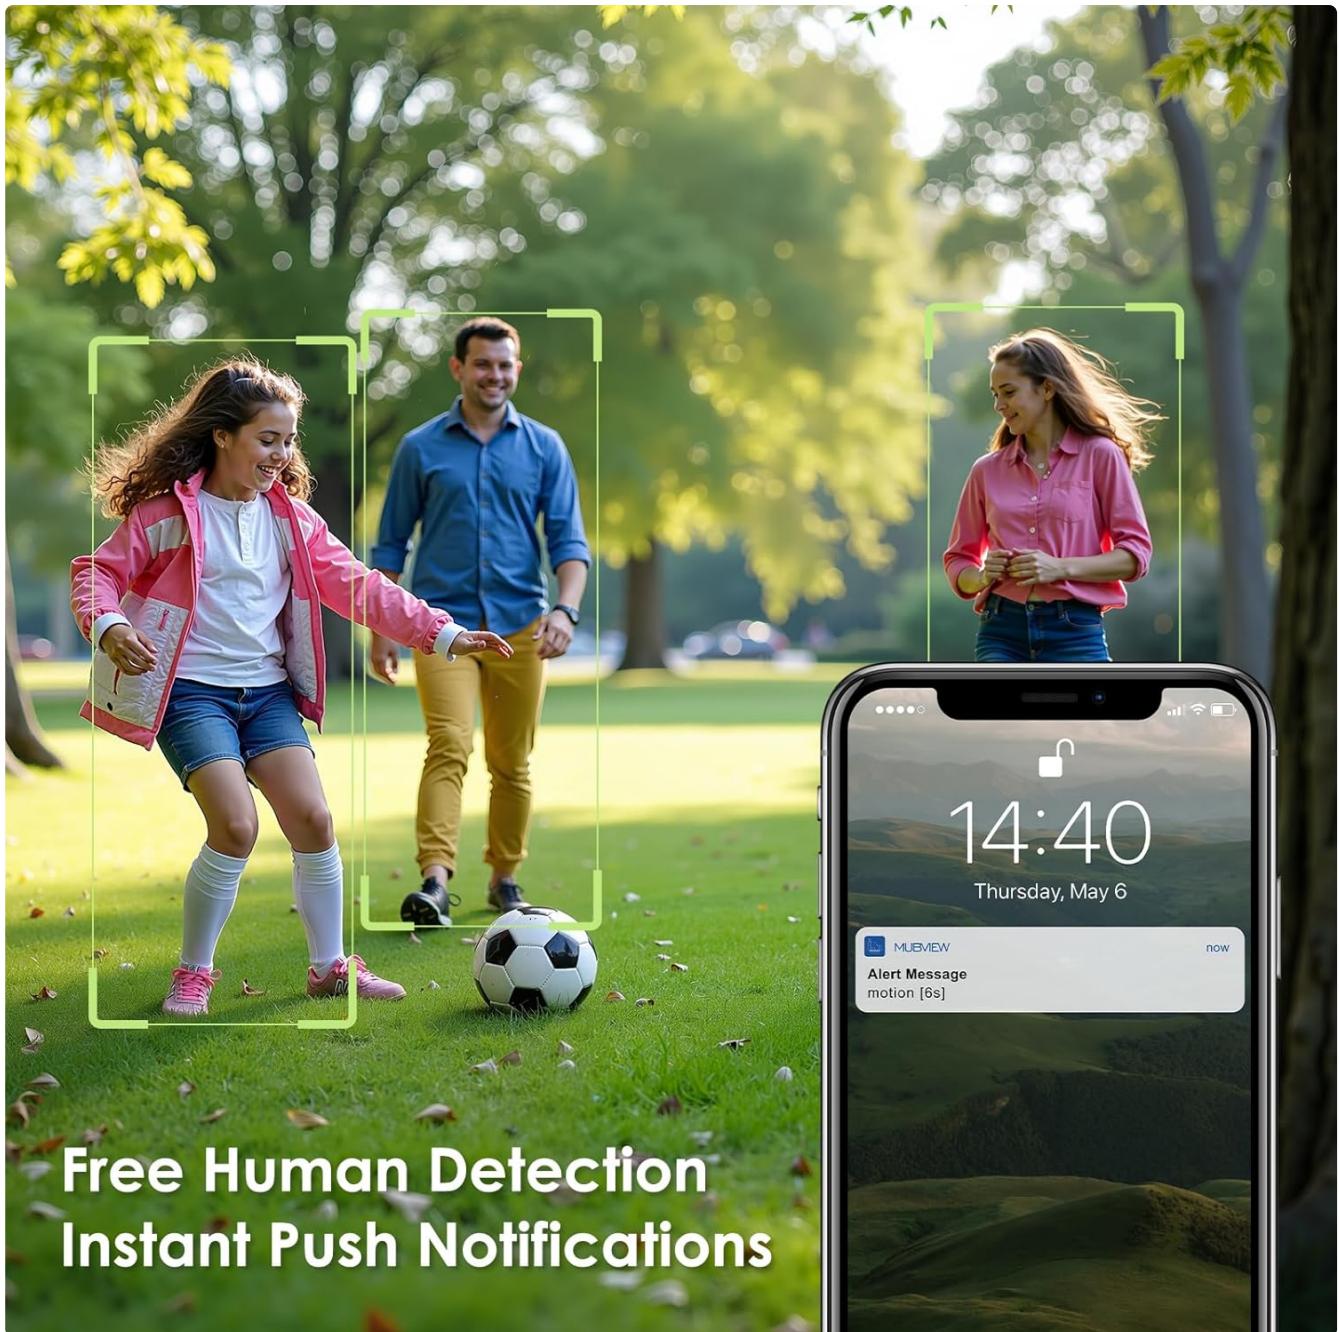


Image: Smartphone notification for human detection from the doorbell camera.

5.3 Night Vision

- The doorbell camera automatically switches to IR night vision in low-light conditions.
- Enhanced night vision provides clear images up to 33 feet.



Image: Day and night vision capabilities of the MUBVIEW Bell J7 doorbell.

5.4 Video Storage

- **Micro SD Card:** Insert a micro SD card (up to 128GB, not included) into the designated slot for local storage of recorded footage.
- **Cloud Storage:** Enjoy 7-day free cloud loop storage. Optional premium cloud storage plans are available for extended storage and features.



Tech for all

High Quality - **Up to 5 years**
 Easy-to-use - **You can**
 Ensured - **Lifetime Ensured**
 Elegant Simple Design - **You want**



Rocket Speed

5 minutes Respond during 9:00 AM - 5:00 PM EST
30 minutes Online respond
12 hours Global respond



Trust us

Professional technical team
30 days AMZ return

Login your account ➤ Choose "Your orders" ➤ Find the order ID ➤ Click "Contact seller"

Image: Multiple storage options: local Micro SD card and cloud service.

6. FEATURES

- 2K Full HD Resolution:** Provides clear and detailed video.
- 145° Wide Angle Lens:** Offers a broad view of your doorstep.
- Battery-Powered:** Ensures easy, wire-free installation.
- 2.4GHz Wi-Fi Connectivity:** Stable and reliable wireless connection.
- IP65 Weather Resistance:** Built to withstand various outdoor conditions (rain, heat, hail, sun, dust).
- Anti-Theft Alarm:** Siren sounds if the doorbell is tampered with.
- Voice Changer:** Enhances privacy during two-way audio.
- Pre-Recorded Voice Messages:** Respond quickly with custom messages.
- Family Sharing:** Supports up to 15 online users and 20 user accounts.
- Compatibility:** Works with Alexa and Google Assistant.

Specs Comparison

Features	MUBVIEW J7 <small>HOT</small>		Others
Custom Region	✓		-
Tamper Alarm	✓		-
Voice Changer	✓		-
No Subscription	✓		-
Pre-Recorded Voice	✓		-
Work with Alexa & Google Assistance	✓		-
Video Resolution	2K Full HD		1080P/720P
Doorbell Chime	Wireless		Wired
Battery Time	90-Day Battery		30-Day Battery

Image: Overview of MUBVIEW Bell J7 features.

7. MAINTENANCE

7.1 Battery Charging

The doorbell is powered by rechargeable batteries. Monitor the battery level through the app and recharge as needed. The battery life can extend up to 180 days on a single charge, depending on activity and settings.

7.2 Cleaning

Wipe the camera lens and the doorbell's exterior with a soft, damp cloth to remove dust and debris. Avoid using harsh chemicals or abrasive materials that could damage the device.

7.3 Weather Resistance

The MUBVIEW Bell J7 is IP65 weather-resistant, designed to endure various outdoor conditions. However, extreme weather conditions may still impact performance or battery life.



Image: IP65 Weather Resistance of the MUBVIEW Bell J7 doorbell.

8. TROUBLESHOOTING

Issue	Possible Solution
Doorbell not connecting to Wi-Fi	Ensure your Wi-Fi is 2.4GHz. Move the doorbell closer to your router during setup. Reset the doorbell and try again.
Frequent false motion alarms	Adjust the motion detection sensitivity in the app. Set custom motion zones to exclude busy areas or moving foliage.
Poor video quality	Check your Wi-Fi signal strength in the app. Ensure the camera lens is clean and free from obstructions.
Short battery life	Reduce motion detection sensitivity or frequency of live view access. Ensure the doorbell is fully charged.
Anti-theft alarm not working	Ensure the anti-theft feature is enabled in the app settings. Check if the doorbell is properly seated in its mounting bracket, activating the tamper button.

9. SPECIFICATIONS

- **Model Name:** Bell J7
- **Video Capture Resolution:** 2K
- **Connectivity Technology:** Wireless (2.4GHz Wi-Fi)
- **Power Source:** Battery Powered (3 A batteries included)
- **Indoor/Outdoor Usage:** Outdoor
- **Water Resistance Level:** IP65 Waterproof
- **Special Features:** 2-Way Audio, Built-In Light, HD Resolution, Image Sensor, Motion Sensor, Voice Changer, Anti-Theft Alarm
- **Compatible Devices:** Smartphone (via CloudEdge/MUBVIEW app)
- **Product Dimensions:** 1.37 x 5.27 x 2.2 inches
- **Item Weight:** 15.4 ounces

10. WARRANTY AND SUPPORT

MUBVIEW is committed to providing quality products and customer satisfaction. For any inquiries or support needs, please refer to the following:

- **Customer Service:** Available via Call Service (9AM-5PM EST) and Online Email.
- **Returns:** 30-day Amazon return policy applies.
- **Protection Plans:** Optional 2-Year and 3-Year protection plans are available for purchase.

For detailed contact information, please visit the official MUBVIEW website or refer to the contact details provided in the product packaging.



Image: MUBVIEW Customer Service details.