

TQQ A2757, A2777, A2696, A3354, A3355, A3356

TQQ Keyboard Case User Manual

For iPad 10th Generation (10.9", 2022) & iPad (A16) 11th Generation (11", 2025)

INTRODUCTION

Thank you for choosing the TQQ Keyboard Case. This manual provides detailed instructions for setting up, operating, and maintaining your new keyboard case. Please read this manual carefully before use to ensure optimal performance and longevity of your product.

COMPATIBILITY

This keyboard case is designed for specific iPad models. Please verify your iPad model number on the back of your device before use.

- **iPad 10th Generation (10.9-inch, 2022 Release)**
Compatible Models: A2757, A2777, A2696
- **iPad (A16) 11th Generation (11-inch, 2025 Release)**
Compatible Models: A3354, A3355, A3356

Compatible With

✓ **iPad (A16) 11th Generation 11-inch 2025**
(Model: A3354 / A3355 / A3356)

✓ **iPad 10th Generation 10.9-inch 2022**
(Model: A2696 / A2757 / A2777)



Please check the model number **No. "AXXX"** the bottom of the back of your tablet to confirm correct size before purchasing

This image illustrates the compatible iPad models and highlights the location for checking your iPad's model number (e.g., A2696) on the back of the device.

PACKAGE CONTENTS

Ensure all items are present in the package:

- 1 x TQQ Keyboard Case for iPad
- 1 x Wireless Detachable Keyboard
- 1 x Transparent Keyboard Protector
- 1 x USB Charging Cord (Type-C)
- 1 x User Guide (this manual)

SETUP INSTRUCTIONS

1. Charging the Keyboard

Before first use, fully charge the keyboard. The keyboard features a built-in Li-ion battery with an energy-saving mode.

1. Connect the provided USB Type-C charging cord to the keyboard's charging port.

2. Connect the other end of the USB cable to a USB power adapter (not included) or a computer's USB port.
3. The charge indicator light will illuminate during charging.
4. A full charge typically takes 2-3 hours. The indicator light will change or turn off once fully charged.

Note: Please charge the keyboard when the power indicator flashes red.



This image shows the Type-C charging port on the keyboard and the charging cable connected.

2. Pairing the Keyboard with your iPad

The keyboard connects to your iPad via Bluetooth.

1. Ensure the keyboard is charged.
2. Turn on the keyboard by sliding the power switch to the 'ON' position. The Bluetooth indicator light will start flashing.
3. On your iPad, go to **Settings > Bluetooth**.
4. Turn on Bluetooth. Your iPad will search for available devices.
5. Locate and select "Bluetooth Keyboard" (or similar name) from the list of devices.
6. If prompted, enter the pairing code displayed on your iPad using the keyboard, then press **Enter**.
7. Once paired, the Bluetooth indicator light on the keyboard will stop flashing and remain solid, or turn

off, indicating a successful connection.

Versatile use scenarios



This image demonstrates how to turn on the keyboard and initiate Bluetooth pairing, showing the 'CONNECT' button and indicator lights.

OPERATING INSTRUCTIONS



1. Attaching and Detaching the Keyboard

The keyboard is magnetically attached to the case, allowing for easy removal and reattachment.

- To attach: Align the keyboard with the magnetic strip inside the case. It will snap into place.
- To detach: Gently pull the keyboard away from the magnetic strip.

Magnetic Detachable

Wireless Keyboard case

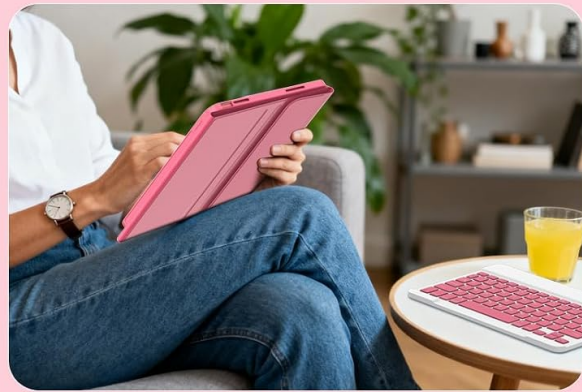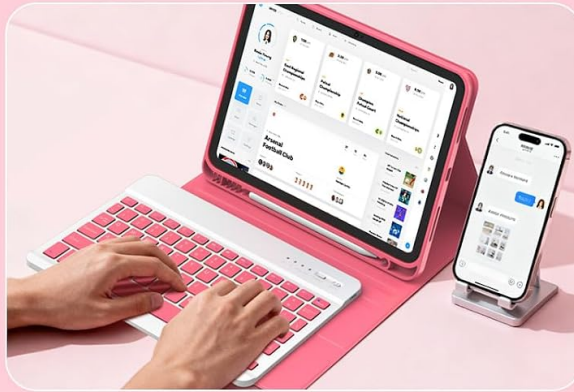

This image illustrates the magnetic attachment mechanism, showing the keyboard being lifted from the case.

2. Adjusting Viewing Angles

The case allows for multiple viewing angles to suit various activities like typing, watching videos, or drawing.

1. Place your iPad into the case.
2. Fold the front cover back to form a triangular stand.
3. Adjust the iPad's position along the grooves in the case to achieve your desired viewing angle (e.g., 115°, 120°, 130°).

Multiple Viewing Angles

Adjust comfortable position



This image displays the case configured for different viewing angles, such as 115°, 120°, and 130°, suitable for various tasks.

3. Using Multi-Function Shortcut Keys

The keyboard includes several shortcut keys for enhanced productivity.

Multi-Function Shortcut Keys



This image highlights the various shortcut keys on the keyboard, including media controls, volume, brightness, and common editing functions.

- **Esc:** Home
- **F1:** Search
- **F2:** Select All
- **F3:** Copy
- **F4:** Cut
- **F5:** Paste
- **F6:** Previous Track
- **F7:** Play/Pause
- **F8:** Next Track
- **F9:** Volume Down
- **F10:** Volume Up
- **F11:** Brightness Down
- **F12:** Brightness Up
- **Delete:** Lock/Delete

4. Pencil Holder

The case includes a dedicated slot for your Apple Pencil or other stylus, preventing loss and keeping it secure.

MAINTENANCE

Cleaning the Case and Keyboard

- Wipe the case with a soft, damp cloth. Avoid harsh chemicals or abrasive cleaners.
- For the keyboard, use a soft, dry cloth. If necessary, a slightly damp cloth can be used, but ensure no moisture enters the keys or ports.
- The transparent keyboard protector can be removed and cleaned with mild soap and water, then air-dried.

Battery Care

- To prolong battery life, avoid fully discharging the keyboard frequently.
- Charge the keyboard regularly, especially if it will be stored for an extended period.
- Store the keyboard in a cool, dry place.

TROUBLESHOOTING

Keyboard Not Connecting via Bluetooth

- **Check Power:** Ensure the keyboard is turned on and has sufficient battery charge.
- **Re-pair:** Go to your iPad's Bluetooth settings, forget the keyboard device if it's listed, and then attempt to pair again following the setup instructions.
- **Restart Devices:** Try restarting both your iPad and the keyboard.
- **Interference:** Move away from other wireless devices that might cause interference.

Keyboard Not Charging

- **Check Cable:** Ensure the USB Type-C charging cable is securely connected to both the keyboard and the power source. Try a different cable if available.
- **Power Source:** Try a different USB power adapter or a different USB port on your computer.
- **Indicator Light:** Confirm the charge indicator light illuminates when connected to power.

SPECIFICATIONS

Feature	Detail
Connectivity Technology	Bluetooth
Keyboard Description	Wireless, Detachable, Multi-Functional
Battery Type	Built-in Li-ion (1 x 9V battery included)
Full Charge Time	2-3 hours
Working Time	At least 80 hours
Standby Time	130 days

Material	Acrylonitrile Butadiene Styrene (ABS)
Item Weight	1.94 pounds
Package Dimensions	11.18 x 8.23 x 1.3 inches

WARRANTY AND SUPPORT

TQQ products come with a commitment to quality. If you encounter any issues or have questions regarding your TQQ Keyboard Case, please do not hesitate to contact our customer service team. We are dedicated to resolving any problems you may experience.

For support, please refer to the contact information provided with your purchase or visit the official TQQ store on Amazon: [TQQ Store](#)