

AIMIUVEI T12

AIMIUVEI 4G Kids Smartwatch T12 User Manual

Model: T12

1. INTRODUCTION

This manual provides detailed instructions for setting up, operating, and maintaining your AIMIUVEI 4G Kids Smartwatch Model T12. Please read this manual carefully before use to ensure proper functionality and safety.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- 1x AIMIUVEI 4G Kids Smartwatch (T12)
- 1x Replacement Strap
- 1x Charging Cable
- 1x User Manual
- 2x Tempered Glass Screen Protectors
- 1x SIM Card Pin Ejector
- 1x Plastic Bar (for strap replacement)
- 2x Spare Pins for Strap



Image: Contents of the AIMIUVEI 4G Kids Smartwatch T12 package.

3. GETTING STARTED (SETUP)

3.1. SIM Card Installation

The smartwatch requires a Nano-SIM card for 4G connectivity, calls, and GPS features. Ensure the SIM card is active and supports 4G networks.

1. Locate the SIM card slot on the side of the smartwatch.
2. Use the provided SIM card pin ejector to open the SIM card tray.
3. Carefully place the Nano-SIM card into the tray with the gold contacts facing up and the notched corner aligned correctly.
4. Gently push the tray back into the smartwatch until it clicks into place.

3.2. App Download and Pairing

To manage the smartwatch and access all features, download the companion application on your smartphone.

1. Download the "Setracker2" app from your smartphone's App Store (iOS) or Google Play Store

- (Android). Alternatively, scan the QR code provided in the manual.
2. Open the app and register for a new account.
 3. Log in to your account.
 4. Scan the 15-digit IMEI barcode found on the smartwatch or its packaging to bind the device to your account.
 5. Complete any remaining configuration steps within the app.

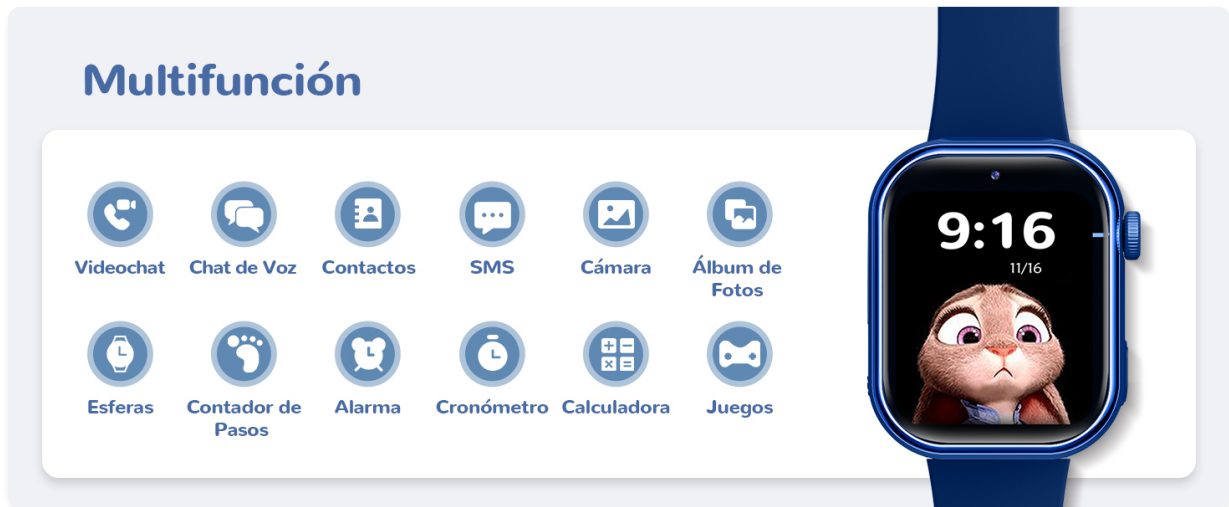


Image: Visual guide for connecting the smartwatch to the app and inserting the SIM card.

3.3. Initial Charging

Before first use, fully charge the smartwatch.

- Connect the magnetic charging cable to the charging port on the back of the smartwatch.
- Connect the USB end of the cable to a standard USB power adapter (not included) or a computer USB port.
- A full charge typically takes approximately 2 hours and provides 2-3 days of usage.

High Efficiency & Long Battery Life

Super long-lasting battery, keeps you company on adventures all day long!



Image: Smartwatch charging via magnetic cable, highlighting the 800mAh battery and long battery life.

4. KEY FEATURES AND OPERATION

4.1. 4G Two-Way Communication

The smartwatch supports 4G networks, enabling stable and clear communication.

- **Voice Calls:** Make and receive voice calls with pre-approved contacts.
- **Video Calls:** Conduct real-time video calls with family members through the app.
- **Voice Chat:** Send and receive voice messages with family groups.

4G Two-Way Calling

Chat with Mom and Dad anytime! Share all the fun stories!



Image: Child using the smartwatch for phone calls and video calls with a parent.

4.2. Dual Camera Functionality

The smartwatch features both a front-facing and a side-facing 0.3-megapixel HD camera.

- **Front Camera:** Ideal for selfies and video calls.
- **Side Camera:** Capture surrounding scenery.
- Switch between cameras freely within the camera application on the watch.

Front-Facing Video + Side-Facing Photo Taking

Capture both selfies and scenery, and put all the fun stuff in this watch!



Image: Smartwatch displaying video calls and children taking photos with the side camera.

4.3. Location Tracking (GPS+WiFi+LBS)

Utilizes triple positioning technology for accurate location tracking.

- **Real-time Location:** Parents can view the child's precise location via the app.
- **Safe Zones:** Set electronic safe areas; receive notifications if the child enters or exits these zones.
- **Location History:** Review past locations and routes.

GPS+WIFI+LBS

Get notified immediately on your phone if your child wanders beyond a preset safe zone.



**Live Location
Pinpoint**



**Safe
Zone**



**Location
History Review**



Image: Child on a bicycle with the smartwatch, illustrating GPS tracking on a map.

4.4. SOS Emergency Call

In case of an emergency, the child can activate the SOS function.

- Press and hold the SOS button for 3 seconds.
- The smartwatch will automatically call up to 3 pre-defined emergency contacts until one answers.

One-Touch SOS Emergency Call

If you feel scared, just press this secret button!
Your parents will know right away!



Image: Child activating the SOS function on the smartwatch, with the watch displaying an emergency call.

4.5. Class Mode

Parents can configure restricted usage periods to minimize distractions during school hours.

- During Class Mode, games and entertainment functions are automatically disabled.
- Only the time and pedometer remain active.
- The "reject unknown calls" function can be activated to block calls from unlisted numbers.

Class Mode & Focus on Learning

Use your focus superpower in class! Unlock playtime after school!



**Class
Mode**



**App
Restrictions**



**Block Unkno-
wn Calls**

Image: Smartwatch in Class Mode, indicating restricted functions during school hours.

4.6. Other Functions

The smartwatch includes a variety of additional useful features:

- **Pedometer:** Tracks steps and activity levels.
- **Sleep Monitor:** Records sleep patterns.
- **Alarm:** Set multiple alarms for reminders.
- **Flashlight:** Built-in light for convenience.
- **Stopwatch:** For timing activities.
- **Calculator:** Basic arithmetic functions.
- **Educational Games:** Seven integrated games for entertainment and learning.
- **Reward System:** Encourages positive behavior.

IP68 Resistencia al Agua

Uso diario sin preocupaciones, diversión sin restricciones.



Sudor



Lluvia



Lavado de Manos

Image: Smartwatch displaying pedometer and sleep tracking data.

4.7. Water Resistance (IP68)


The smartwatch is rated IP68 for water resistance.

- It is resistant to sweat, rain, and splashes.
- It is **not** suitable for swimming, bathing, or diving.
- Avoid exposure to hot water or steam.

Cómo Conectarlo



Descarga "Setracker2" desde la App Store o escanea el código QR del manual.



Abre la aplicación, introduce tus datos y regístrate.



IMEI:863269079020993


Inicia sesión y escanea el código de barras IMEI de 15 dígitos en el reloj.



Vincula el smartwatch a tu teléfono móvil.



Inserta la tarjeta Nano-SIM en el smartwatch.



Completa toda la configuración.

Image: Children playing with water, illustrating the smartwatch's IP68 water resistance.

5. MAINTENANCE AND CARE

5.1. Charging

- Always use the provided magnetic charging cable.
- Ensure the charging contacts on the watch and cable are clean and dry before charging.
- Do not charge the watch in wet conditions.

5.2. Cleaning

- Wipe the smartwatch and strap regularly with a soft, dry, lint-free cloth.
- For stubborn dirt, slightly dampen the cloth with water. Avoid using harsh chemicals or abrasive materials.
- Ensure the watch is completely dry before wearing or charging.

5.3. Water Resistance Guidelines

- The IP68 rating means the watch is protected against dust and can withstand immersion in water up to 1.5 meters for up to 30 minutes.
- However, water resistance is not a permanent condition and may decrease over time with normal wear.
- Avoid exposing the watch to high-velocity water, sudden temperature changes, or corrosive liquids.

6. TROUBLESHOOTING

If you encounter issues with your smartwatch, refer to the following common solutions:

- **Watch not turning on:** Ensure the watch is fully charged. Connect it to the charger for at least 30 minutes.
- **Cannot make/receive calls:** Check if the SIM card is correctly inserted and active. Ensure the watch has 4G network signal. Verify that contacts are saved correctly in the app.
- **GPS location inaccurate:** Ensure the watch has a clear view of the sky for GPS signals. LBS (Location Based Service) and WiFi positioning are used when GPS is unavailable, which may be less precise.
- **App not connecting to watch:** Ensure both the watch and smartphone have internet connectivity. Re-check the IMEI binding in the app. Try restarting both devices.
- **Short battery life:** Reduce screen brightness, disable unnecessary features, and ensure background apps are closed. Frequent video calls and GPS tracking consume more power.
- **Screen unresponsive:** Try restarting the watch. If the issue persists, contact customer support.

7. PRODUCT SPECIFICATIONS

Feature	Specification
Brand	AIMIUVEI
Model Number	T12
Screen Size	1.83 Inches
Battery Capacity	800 mAh (Lithium Ion)
Connectivity Technology	4G Cellular, Wi-Fi
Positioning	Integrated GPS, WiFi, LBS
Camera	0.3 Megapixel HD (Front and Side)
Water Resistance	IP68
Compatible Devices	Smartphone (Android/iOS)
Product Dimensions	28.5 x 10 x 2.3 cm
Product Weight	190 g

8. WARRANTY AND SUPPORT

For warranty information, please refer to the documentation provided with your purchase or contact the seller directly. If you require technical assistance or have questions not covered in this manual, please reach out to AIMIUVEI customer support.

You can find more information and support on the official AIMIUVEI store page: [AIMIUVEI Store](#)