

[Manuals.plus](#) /

› [Dragolftie](#) /

› Dragolftie FHD-215T 21.5 Inch Touchscreen Monitor User Manual

Dragolftie FHD-215T

Dragolftie FHD-215T 21.5 Inch Touchscreen Monitor User Manual

Model: FHD-215T

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your Dragolftie FHD-215T 21.5-inch Touchscreen Monitor. Please read this manual thoroughly before using the product to ensure proper functionality and to prevent damage.



Image 1.1: Overview of the Dragolftie 21.5 Inch FHD Touch Screen Monitor highlighting its main features.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your product package. If any items are missing or damaged, please contact customer support.

- 21.5 Inch Touch Monitor
- Power Adapter

- HDMI Cable
- Type-B Cable (for touch functionality)
- Bracket
- Base
- Instruction Manual



Full HD 1920X1080P

With 1920x1080P resolution and 75Hz refresh rate provides clarity and sharp images.
Low-blue light and flicker-free technology can reduce harmful blue light.

Image 2.1: All components included in the Dragolfite monitor package.

Your browser does not support the video tag.

Video 2.1: This video demonstrates the unboxing and identification of all included components for the 21.5-inch Tilt Adjustable Touch Monitor.

3. SETUP INSTRUCTIONS

3.1 Stand Assembly

Assemble the monitor stand by attaching the bracket to the base, then securely fasten the monitor to the assembled stand. Ensure all screws are tightened to prevent wobbling.

3.2 VESA Mounting

The monitor supports 75x75mm VESA mounting standards. If you prefer to mount the monitor on a wall or an alternative arm, remove the pre-attached stand and use compatible VESA mounting hardware (not included).



VESA SUPPORTS

With 75x75mm VESA wall mountable function to choose the best viewing position while saving space.



75x75mm

Image 3.1: VESA mounting compatibility for the monitor.

3.3 Connecting Cables

Connect the necessary cables to your monitor and computer:

1. **Power:** Connect the power adapter to the monitor's DC port and then to a power outlet.
2. **Video:** Connect the HDMI cable from your computer's HDMI output to the monitor's HDMI input. Alternatively, use a VGA cable for VGA connections.
3. **Touch Functionality:** To enable touch functionality, connect the Type-A to Type-B cable from your computer's USB-A port to the monitor's Type-B port.
4. **Audio:** If using the built-in speakers, ensure the HDMI cable is connected. An additional audio cable is not required for HDMI audio.

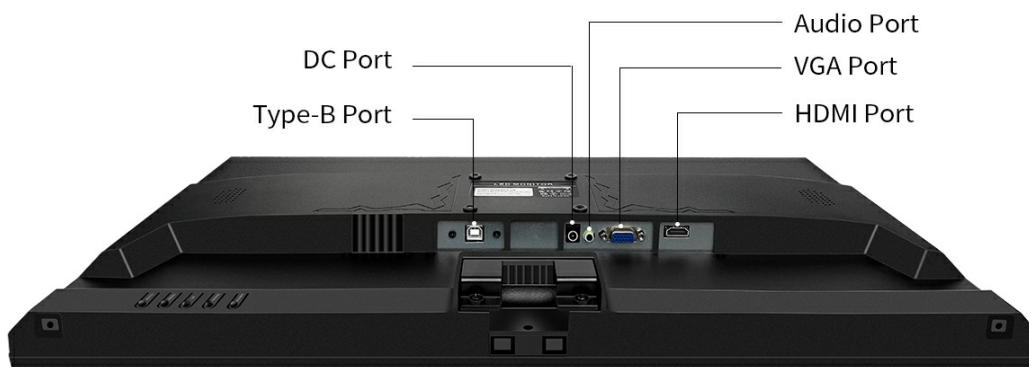


Image 3.2: Monitor interface button and port descriptions.

Your browser does not support the video tag.

Video 3.1: This video demonstrates how to connect the cables to enable the touch function of the monitor.

4. OPERATING INSTRUCTIONS

4.1 Power On/Off

Press the power button located on the monitor's side or rear panel to turn the monitor on or off.

4.2 Touch Functionality

The monitor features responsive 10-point touch technology for intuitive interaction. Use gestures such as tapping, dragging, enlarging, and narrowing directly on the screen.

- **Note:** Touch functionality is not supported on gaming devices, Apple devices, XP system, and Linux system.

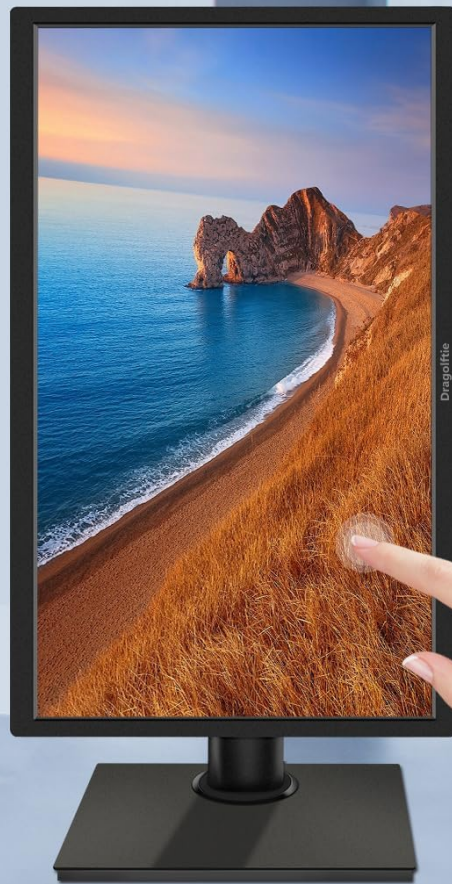


Image 4.1: Demonstration of 10-point capacitive touch on the monitor.

4.3 Adjusting the Stand

The monitor stand offers versatile adjustments for optimal viewing comfort:

- **Height:** Adjust the monitor height from 0-110mm.
- **Pivot:** Rotate the screen -90° to 0° for portrait mode.
- **Swivel:** Swivel the monitor -45° to 45° horizontally.
- **Tilt:** Tilt the screen -5° to 25° vertically.



How To Set The Monitor To Portrait Mode?

You need to set the monitor to portrait mode on your device before use the monitor's portrait mode. Setting the monitor from "Landscape" mode to "Portrait (Flip)" mode in the display settings, and then you can use the monitor's portrait mode.

Image 4.2: Ergonomic and adjustable stand features.

Your browser does not support the video tag.

Video 4.1: This video demonstrates the height, pivot, swivel, and tilt adjustments of the monitor stand.

4.4 Portrait Mode Activation

While the stand supports -90° to 0° rotation, the display mode does not automatically adjust. You must manually change the display settings on your connected device:

1. Rotate the monitor physically to the desired portrait orientation (-90°).
2. On your device, navigate to display settings.
3. Change the display mode from "Landscape" to "Portrait (Flip)".



How To Set The Monitor To Portrait Mode?

You need to set the monitor to portrait mode on your device before use the monitor's portrait mode. Setting the monitor from "Landscape" mode to "Portrait (Flip)" mode in the display settings, and then you can use the monitor's portrait mode.

Image 4.3: Instructions for setting the monitor to portrait mode.

Your browser does not support the video tag.

Video 4.2: This video demonstrates how to set the monitor to portrait mode through device settings.

4.5 Using Built-in Speakers

The monitor includes dual built-in speakers for audio output. Ensure your device is connected via HDMI to utilize the speakers. No external audio cables are needed for HDMI audio.

Ergonomic & Adjustable Stand



Swivel
 $+45^{\circ}\sim-45^{\circ}$



Height Adjustment
0-110mm



Tilt
 $+25^{\circ}\sim-5^{\circ}$



Pivot
 $-90^{\circ}\sim0^{\circ}$

Image 4.4: Monitor with dual built-in speakers for clear audio.

4.6 Display Settings

The monitor offers a 75Hz refresh rate for smooth visuals and 99% sRGB color coverage for accurate color reproduction. It also features low-blue light and flicker-free technology to reduce eye strain during extended use.



10 Point Capacitive Touch

The 21.5 inch touch monitor with smooth, responsive and accuracy 10 points touch function, enabling precise PC Touch interactions, intuitive control over your applications. **(The touch function does not supports on Apple devices, gaming devices, Linux system and XP system).**



Image 4.5: Full HD resolution and eye care features.

5. MAINTENANCE

To ensure the longevity and optimal performance of your monitor, follow these maintenance guidelines:

- **Cleaning the Screen:** Use a soft, lint-free cloth slightly dampened with water or a specialized screen cleaner. Avoid using harsh chemicals, abrasive materials, or alcohol-based cleaners, as these can damage the screen surface.
- **Cleaning the Casing:** Wipe the monitor casing with a soft, dry cloth.
- **Ventilation:** Ensure the monitor's ventilation openings are clear and unobstructed to prevent overheating.
- **Storage:** When not in use for extended periods, store the monitor in a cool, dry place, ideally in its original packaging to protect it from dust and physical damage.

6. TROUBLESHOOTING

If you encounter issues with your monitor, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No display/Power LED off	Power cable disconnected or power outlet issue.	Check power cable connections and try a different power outlet.
No signal	Video cable disconnected or incorrect input selected.	Ensure HDMI/VGA cable is securely connected. Select the correct input source using the monitor's menu buttons.
Touch function not working	Type-B USB cable disconnected or incompatible operating system.	Verify the Type-A to Type-B USB cable is connected to both the monitor and your computer. Note that touch functionality is not supported on gaming devices, Apple devices, XP, or Linux systems.
No sound from built-in speakers	HDMI cable not connected or audio settings on device.	Ensure the HDMI cable is connected. Check your computer's audio output settings to confirm the monitor is selected as the output device.
Screen orientation incorrect in portrait mode	Device display settings not adjusted.	After physically rotating the monitor, adjust your device's display settings from "Landscape" to "Portrait (Flip)".

If the issue persists after attempting these solutions, please contact customer support for further assistance.

7. SPECIFICATIONS

Feature	Detail
Model Number	FHD-215T
Screen Size	21.5 Inches
Resolution	1920 x 1080 Pixels (FHD 1080p)
Aspect Ratio	16:9
Panel Type	TN Panel
Refresh Rate	75Hz
Brightness	250 cd/m ²
Contrast Ratio	1000:1
Color Gamut	99% sRGB
Touch Technology	10-Point Capacitive Touch
Screen Surface	Glossy
Connectivity	1x HDMI, 1x VGA, 1x Type-B USB (for touch)

Feature	Detail
Audio	2x Built-in Speakers
Stand Adjustments	Height (0-110mm), Pivot (-90°-0°), Swivel (-45°-45°), Tilt (-5°-25°)
VESA Compatibility	75x75mm
Eye Protection	Low-blue light and flicker-free technology
Product Dimensions	1.57 x 20 x 12 inches
Item Weight	11.08 pounds

8. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the warranty card included in your package or visit the official Dragolftie website. You may also contact your retailer for assistance.

Please retain your proof of purchase for any warranty claims.