

[manuals.plus](#) /

- › [LEFANT](#) /
- › [LEFANT M210P Robot Vacuum Cleaner User Manual](#)

LEFANT M210P

LEFANT M210P Robot Vacuum Cleaner User Manual

Model: M210P

1. INTRODUCTION

Thank you for choosing the LEFANT M210P Robot Vacuum Cleaner. This manual provides essential information for the safe operation, maintenance, and troubleshooting of your device. Please read it thoroughly before use and retain it for future reference.

2. PRODUCT OVERVIEW

The LEFANT M210P is an ultra-thin robot vacuum cleaner designed for efficient cleaning of various floor types, including hard floors, parquet, carpets, and rugs. It features advanced navigation, multiple cleaning modes, and smart control options.



Image: The LEFANT M210P robot vacuum cleaner, its charging base, two side brushes, and a filter, illustrating the main components included.

3. SETUP

3.1 Charging Base Placement

Place the charging base against a wall in an open area. Ensure there is at least 1 meter (3.3 feet) of clear space to the front and 0.5 meters (1.6 feet) to each side of the charging base for optimal robot navigation and docking.

3.2 Initial Charging

Before first use, fully charge the robot vacuum. Connect the charging base to a power outlet. Place the robot onto the charging base, ensuring the charging contacts align. The indicator light on the robot will show charging status.

3.3 App Connection Guide

The LEFANT M210P can be controlled via the Lefant App. Follow these steps to connect your robot:

1. Download the Lefant App from your device's app store.

2. Open the App and tap "Add Device." Enable Bluetooth on your smartphone.
3. Rotate the blue button switch on the robot to 'I' (On) and press and hold the start button for 6 seconds until the robot indicates pairing mode.
4. The App will automatically detect the M210P robot and display it on the connection page.
5. Ensure your smartphone is connected to a 2.4 GHz Wi-Fi network.
6. Wait for the robot to successfully connect to the App.

Image: A visual guide detailing the six steps required to connect the LEFANT M210P robot vacuum cleaner to the Lefant mobile application.

4. OPERATING THE ROBOT VACUUM

4.1 Cleaning Modes and Suction Levels

The M210P offers six cleaning modes and three adjustable suction levels to suit various cleaning needs and floor types.

- **Automatic Mode:** The robot cleans systematically.
- **Random Mode:** The robot cleans in a random pattern.
- **Spot Cleaning:** The robot focuses on a specific dirty area.
- **Edge Cleaning:** The robot cleans along walls and furniture edges.
- **Scheduled Cleaning:** Set specific cleaning times via the App.
- **Manual Control:** Direct the robot's movement using the App.

You can switch between modes and adjust suction levels (up to 2200Pa) via the Lefant App.

Molteplici Modalità di Pulizia per Soddisfare le tue Esigenze

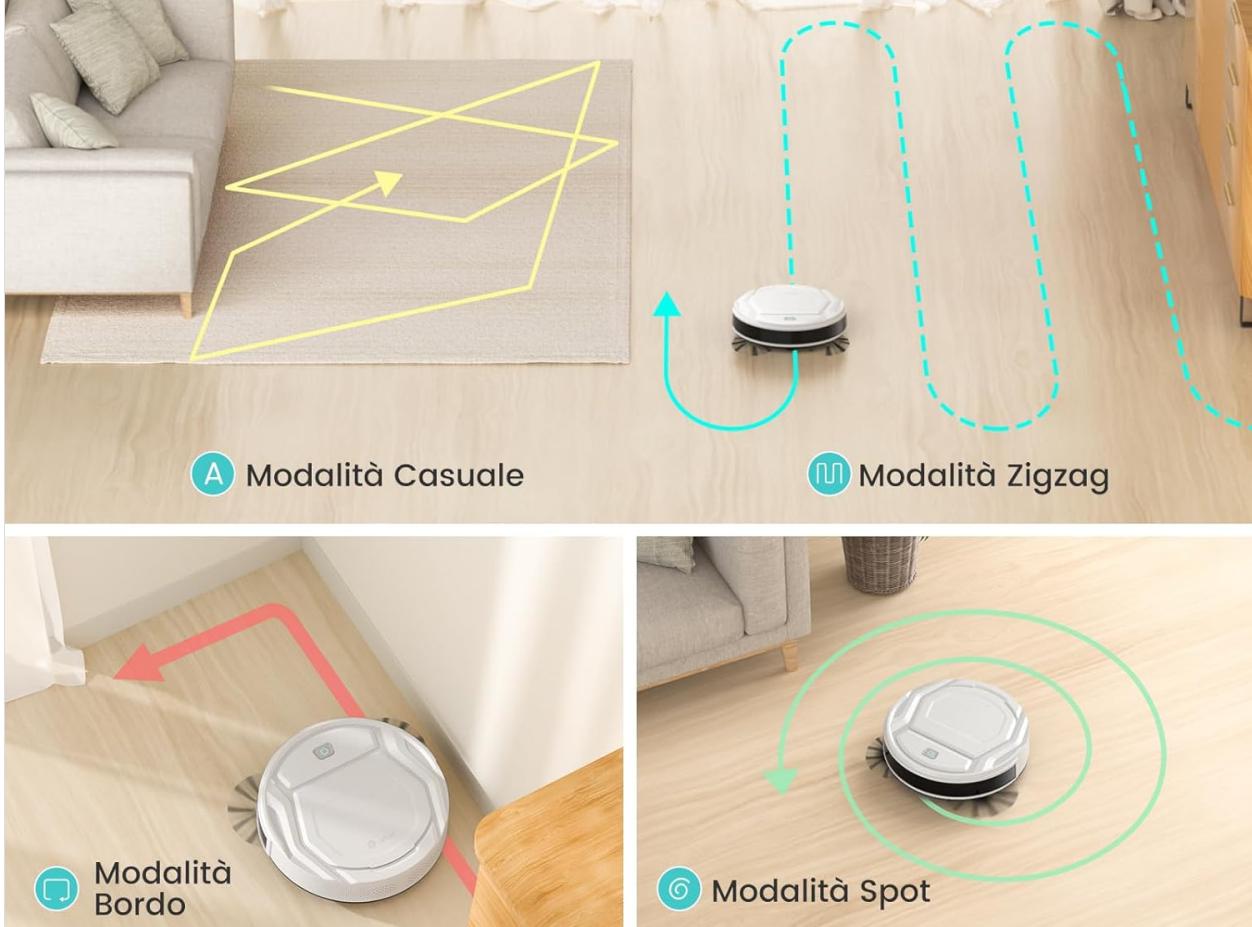


Image: This image illustrates the various cleaning modes available, including random, zigzag, edge, and spot cleaning patterns, demonstrating the robot's versatility.

4.2 Intelligent Zig-Zag Cleaning Path

The M210P utilizes an intelligent zig-zag cleaning path for comprehensive coverage. This method ensures fewer missed spots compared to random cleaning patterns, making the cleaning process more efficient.

Pulizia Efficiente e Intelligente

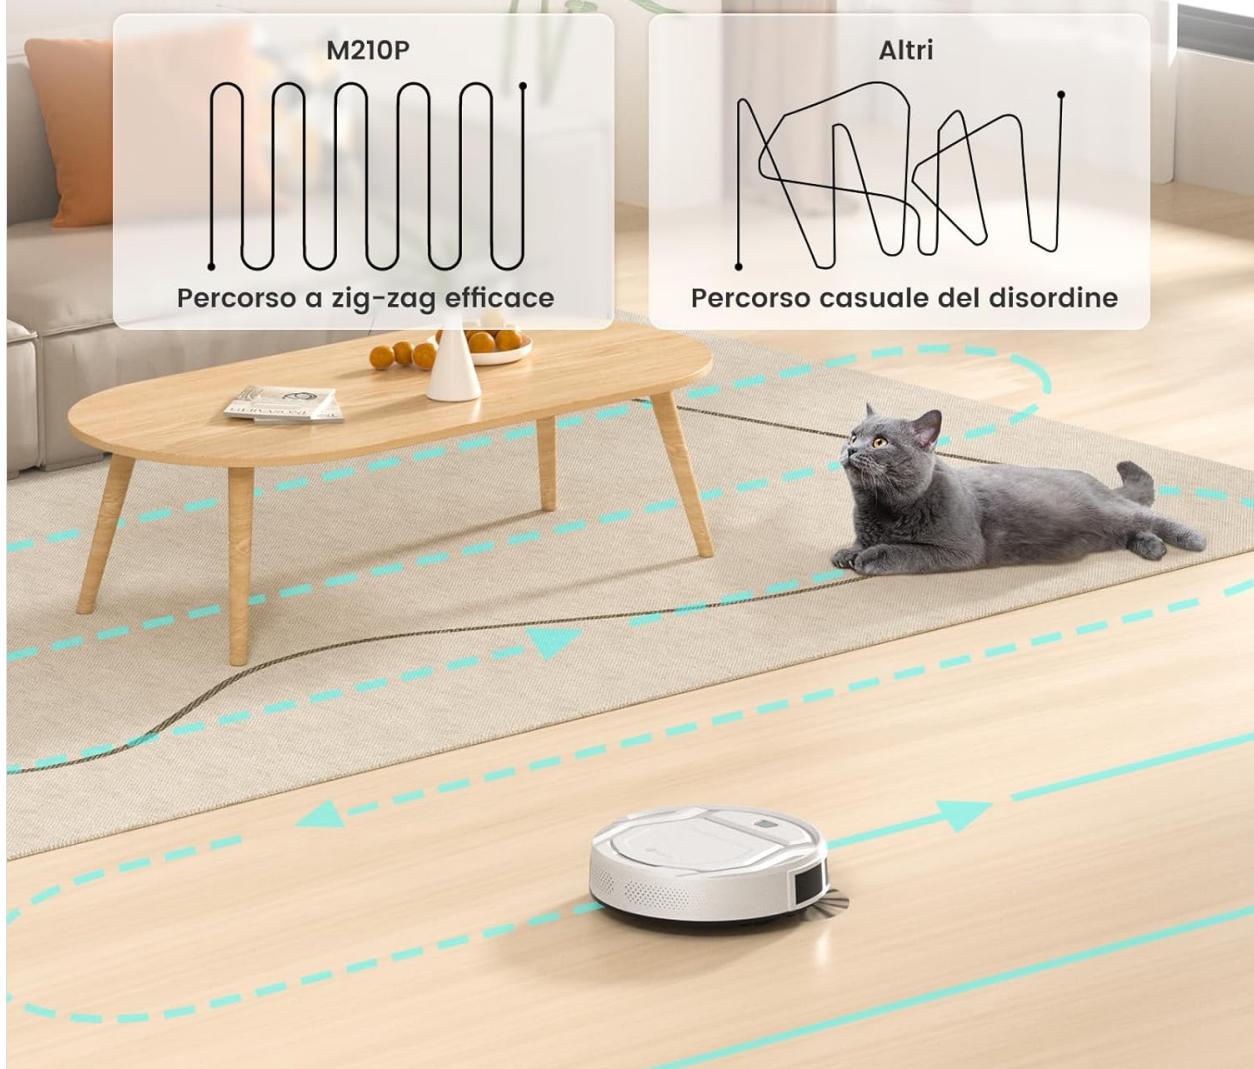


Image: A visual comparison showing the LEFANT M210P's effective zig-zag cleaning pattern versus a less organized, random cleaning path of other robot vacuums.

4.3 FreeMove 3.0 Technology

Equipped with FreeMove 3.0 technology and 6D infrared sensors, the M210P detects its environment at 720°. This prevents collisions with obstacles and falls from stairs, ensuring smooth and efficient movement even in complex environments.

Tecnologia FreeMove Aggiornata 3.0



Image: The LEFANT M210P robot vacuum cleaner showcasing its FreeMove 3.0 technology, using sensors to detect and avoid obstacles in its cleaning path.

4.4 Pet Hair Cleaning

The M210P features a brushless suction port design, which effectively prevents pet hair from tangling. Combined with dual side brushes, it efficiently collects dust, hair, and pet dander, making it suitable for homes with pets.

Magnete per Peli di Animali Domestici

Lefant M210P Design per le famiglie con animali domestici



Image: The LEFANT M210P robot vacuum cleaner effectively collecting pet hair from a wooden floor, demonstrating its suitability for pet owners.

4.5 Smart Control

Control your M210P using the Lefant App, Amazon Alexa, or Google Assistant. The App allows you to schedule cleaning times, select cleaning modes, monitor the cleaning path, and adjust suction power. Voice commands provide convenient hands-free operation.

Controllo Vocale Intelligente



Image: The LEFANT M210P robot vacuum cleaner demonstrating smart voice control compatibility with Amazon Alexa and Google Assistant.

Pulisci dal tuo Smartphone

-  **Programma**
-  **Potenza di Aspirazione**
-  **Controllo Manuale**
-  **Ricaricare**

 **Lefant**

APP Lefant

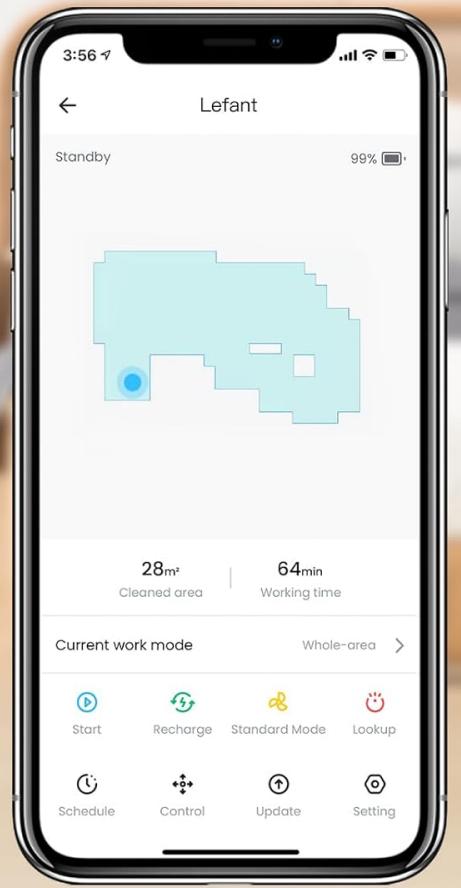


Image: A smartphone displaying the Lefant application interface, which allows users to program, control suction, manually operate, and recharge the robot vacuum.

4.6 Automatic Recharging

When the battery is low or cleaning is complete, the robot will automatically return to its charging base to recharge.

Ricarica con Ritorno Automatico



Image: The LEFANT M210P robot vacuum cleaner illustrating its automatic return path to the charging station for recharging.

5. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your LEFANT M210P.

5.1 Dustbin and Filter Cleaning

The 500ml dustbin should be emptied after each cleaning cycle. The dual-layer filter helps prevent secondary pollution. It is important to note that the filters are not washable and should be replaced periodically.



Image: The LEFANT M210P robot vacuum cleaner with its top cover open, revealing the 500ml capacity dustbin for easy emptying.

5.2 Side Brushes

Inspect the side brushes regularly for wear or entanglement. Clean any hair or debris wrapped around them. Replace worn brushes to maintain cleaning effectiveness.

5.3 Sensors and Charging Contacts

Wipe the robot's sensors and charging contacts on both the robot and the charging base with a dry cloth periodically to ensure proper function and charging.

6. TROUBLESHOOTING

This section addresses common issues you might encounter with your LEFANT M210P.

- **Robot gets stuck or cleans the same area repeatedly:** Ensure the cleaning area is free of excessive clutter, loose cables, or small objects that could obstruct movement. The robot's navigation may sometimes lead to repeated passes in certain zones if the environment is complex.
- **Robot does not return to charging base:** Check if the charging base is properly plugged in and placed in an open area as described in the setup section. Ensure there are no obstacles blocking the robot's path to the base.
- **App mapping issues:** The M210P's mapping feature may not save maps permanently, meaning it recreates a map for each cleaning cycle. This can prevent selecting specific rooms for cleaning. This is a design characteristic, not a malfunction.
- **Mechanical issues (e.g., wheel stuck):** If a wheel or other moving part becomes jammed, first power off the robot and inspect for any visible obstructions. If the issue persists, contact customer support for assistance.

For more detailed troubleshooting or persistent issues, please refer to the official LEFANT support resources.

7. SPECIFICATIONS

Feature	Detail
Model Number	M210P
Dimensions	28 x 28 x 7.8 cm
Weight	3 kg
Form Factor	Round
Battery Type	1 A (required)
Battery Life	Up to 120 minutes
Dustbin Capacity	500 ml
Filter Type	Multi-layer

Suction Power	Up to 2200Pa
Connectivity	2.4GHz WiFi, App, Alexa, Google Assistant
Color	White



Image: This image highlights the LEFANT M210P's impressive runtime of 120 minutes, capable of cleaning an area up to 120 square meters on a single charge.



Image: The LEFANT M210P robot vacuum cleaner demonstrating its ultra-thin profile (7.8cm height) and quiet operation (55dB), allowing it to clean under furniture without disturbance.

8. WARRANTY AND SUPPORT

8.1 Warranty Information

Specific warranty details are typically provided with your product packaging or on the official LEFANT website. Please refer to these resources for information regarding warranty duration and terms.

8.2 Customer Support

For technical assistance, troubleshooting not covered in this manual, or spare parts, please contact LEFANT customer support. Contact information can usually be found on the LEFANT official website or through your purchase platform.

© 2025 LEFANT. All rights reserved.

Related Documents - M210P

 Lefant  User manual Lefant M210P Robot Vacuum Cleaner	<p><u>Lefant M210P Robot Vacuum Cleaner User Manual and Troubleshooting Guide</u></p> <p>Comprehensive user manual for the Lefant M210P Robot Vacuum Cleaner, covering product introduction, assembly, charging, environment preparation, button functions, app configuration, maintenance, troubleshooting, technical specifications, and warranty information. Optimize your cleaning experience with this detailed guide.</p>

Congratulations on the purchase of your Lefant robot. We hope you will be happy with your purchase. This manual will keep your home clean and provide you a high-quality life.

Should you encounter situations that have not been properly addressed in this manual, please contact our customer service center or visit our website www.lefant.com or send email to the following email address: support@lefant.com.

The Lefant team is always working to improve technology and/or design changes to this product continuous improvement.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: Read all safety warnings and instructions. Failure to follow the instructions listed below may result in electric shock, fire, or personal injury. **Do not use this product near water.**

For household use only.

When using an electrical appliance, basic precautions should always be followed, including the following:

1. The robot must be used in accordance with the directions in this user manual. Our company cannot be held liable or responsible for damage or injury resulting from misuse.

2. Do not allow it to be used as a toy. Close attention is necessary when used near children.

3. Do not allow children to use the vacuum.

4. Use caution when handling power cords and small objects that are on the floor that could entangle the robot. Tuck rug edges and other small objects under the robot to prevent possible cords off the floor.

5. If the robot is used in the cleaning area due to a step or curb, you should operate the robot to ensure that it can detect the step necessary to place a physical barrier at the edge to keep the unit from falling off the curb. This is not a safety feature.

6. Only use as described in this manual. Only use attachments recommended by the manufacturer.

7. Please make sure your power supply voltage matches the power requirements of the robot.

8. Do not handle or plug/unplug with wet hands.

9. Do not use the robot in extremely hot or cold areas.

10. Do not use the robot to clean areas where the temperature is in temperature above $10^{\circ}\text{C}/50^{\circ}\text{F}$ and below $40^{\circ}\text{C}/104^{\circ}\text{F}$ inclusive of cleaning areas where the robot is not designed to operate. Use of the appliance outside of the temperature range specified in the instructions may damage the robot and/or the battery and/or the specified range may damage the battery and increase the risk of fire.

11. Keep hands, loose clothing, fingers and parts of body away from the spinning cleaning working parts.

12. Do not use the robot in areas where an infant or child is sleeping.

13. Do not use the robot in outdoor, commercial or industrial environments. Do not use appliance on wet surfaces.

14. Do not allow the robot to pick up large objects like stones, large pieces of debris, or other sharp objects.

15. Do not use the robot to pick up flammable or combustible materials such as paint thinner, paint or copper tone, or use in areas where they may be present.

16. Do not use the robot to pick up any sharp objects, needles, pins, needles, or anything that could cause it to cut.

17. Do not allow the robot to operate on any surface with any opening located, being free of dust, dirt, hair, and anything that may interfere with the robot.

18. Take care not to damage the power cord. Do not pull or carry the robot by the power cord. Do not pull or carry the robot by the power cord or handle, close or open the door on the power cord or pull power cord to close or open the door. Do not lay the power cord over the power cord keep power cord away from hot surfaces. Do not damage by pulling on cord, or unplug, grasp the plug, not the cord.

19. Do not power the robot if it is damaged by the manufacturer.

20. If the power cord is damaged, it must be replaced by the manufacturer or a qualified service center or a person qualified to do this.

21. Do not use the locking station if it is damaged.

22. Do not use the robot if it is damaged or not working properly has been dropped, damaged, left outdoors, or come in contact with water. Have the robot checked by the manufacturer or its service agent in order to avoid a hazard.

23. Do not remove the power switch before cleaning or monitoring the robot.

24. The plug must be removed from the receptacle before cleaning or monitoring the robot.

25. Remove the robot from the docking station, and turn off the power switch before cleaning or monitoring the robot for disposal of the robot.

26. The robot must be disposed of in accordance with local laws and regulations before disposal of the robot.

27. Do not dispose of the robot in accordance with local laws and regulations.

28. Do not attempt to clean it when it is severely damaged. The surface can explode in fire.

29. When not using the docking station for cleaning or monitoring the robot.

30. Invent understanding starting instructions is a useful practice for the robot. Turn the robot on, push buttons, and use the appliance. Carrying the robot with your finger on the switch or operating the robot with your finger on the switch can cause damage.

31. When battery pack is not in use, keep it away from other metal objects. If the metal objects touch the terminals of the battery pack, a connection from one terminal to another, shorting the battery terminals together, may cause burns or fire.

32. Do not use the battery pack if it is damaged or if it is not reflected from the battery pack.

33. Do not use the battery pack if it is not reflected from the battery pack.

34. Do not use the battery pack if it is not reflected from the battery pack.

35. Do not use the battery pack if it is not reflected from the battery pack.

36. Do not modify or attempt to repair the robot or the battery pack. Do not attempt to repair the robot or the battery pack.

37. Do not operate the robot in a room that has a condensate drain or a water leak. Do not use the robot in a room that has a condensate drain or a water leak.

38. Exchange only with the charge specified by the manufacturer.

39. Do not use the robot with another battery pack.

40. Do not use the robot with another battery pack.

41. Do not use the robot with another battery pack.

42. Do not use the robot with another battery pack.

43. Do not use the robot with another battery pack.

44. Do not use the robot with another battery pack.

45. Do not use the robot with another battery pack.

46. Do not use the robot with another battery pack.

47. Do not use the robot with another battery pack.

48. Do not use the robot with another battery pack.

49. Do not use the robot with another battery pack.

50. Do not use the robot with another battery pack.

51. Do not use the robot with another battery pack.

52. Do not use the robot with another battery pack.

53. Do not use the robot with another battery pack.

54. Do not use the robot with another battery pack.

55. Do not use the robot with another battery pack.

56. Do not use the robot with another battery pack.

57. Do not use the robot with another battery pack.

58. Do not use the robot with another battery pack.

59. Do not use the robot with another battery pack.

60. Do not use the robot with another battery pack.

61. Do not use the robot with another battery pack.

62. Do not use the robot with another battery pack.

63. Do not use the robot with another battery pack.

64. Do not use the robot with another battery pack.

65. Do not use the robot with another battery pack.

66. Do not use the robot with another battery pack.

67. Do not use the robot with another battery pack.

68. Do not use the robot with another battery pack.

69. Do not use the robot with another battery pack.

70. Do not use the robot with another battery pack.

71. Do not use the robot with another battery pack.

72. Do not use the robot with another battery pack.

73. Do not use the robot with another battery pack.

74. Do not use the robot with another battery pack.

75. Do not use the robot with another battery pack.

76. Do not use the robot with another battery pack.

77. Do not use the robot with another battery pack.

78. Do not use the robot with another battery pack.

79. Do not use the robot with another battery pack.

80. Do not use the robot with another battery pack.

81. Do not use the robot with another battery pack.

82. Do not use the robot with another battery pack.

83. Do not use the robot with another battery pack.

84. Do not use the robot with another battery pack.

85. Do not use the robot with another battery pack.

86. Do not use the robot with another battery pack.

87. Do not use the robot with another battery pack.

88. Do not use the robot with another battery pack.

89. Do not use the robot with another battery pack.

90. Do not use the robot with another battery pack.

91. Do not use the robot with another battery pack.

92. Do not use the robot with another battery pack.

93. Do not use the robot with another battery pack.

94. Do not use the robot with another battery pack.

95. Do not use the robot with another battery pack.

96. Do not use the robot with another battery pack.

97. Do not use the robot with another battery pack.

98. Do not use the robot with another battery pack.

99. Do not use the robot with another battery pack.

100. Do not use the robot with another battery pack.

101. Do not use the robot with another battery pack.

102. Do not use the robot with another battery pack.

103. Do not use the robot with another battery pack.

104. Do not use the robot with another battery pack.

105. Do not use the robot with another battery pack.

106. Do not use the robot with another battery pack.

107. Do not use the robot with another battery pack.

108. Do not use the robot with another battery pack.

109. Do not use the robot with another battery pack.

110. Do not use the robot with another battery pack.

111. Do not use the robot with another battery pack.

112. Do not use the robot with another battery pack.

113. Do not use the robot with another battery pack.

114. Do not use the robot with another battery pack.

115. Do not use the robot with another battery pack.

116. Do not use the robot with another battery pack.

117. Do not use the robot with another battery pack.

118. Do not use the robot with another battery pack.

119. Do not use the robot with another battery pack.

120. Do not use the robot with another battery pack.

121. Do not use the robot with another battery pack.

122. Do not use the robot with another battery pack.

123. Do not use the robot with another battery pack.

124. Do not use the robot with another battery pack.

125. Do not use the robot with another battery pack.

126. Do not use the robot with another battery pack.

127. Do not use the robot with another battery pack.

128. Do not use the robot with another battery pack.

129. Do not use the robot with another battery pack.

130. Do not use the robot with another battery pack.

131. Do not use the robot with another battery pack.

132. Do not use the robot with another battery pack.

133. Do not use the robot with another battery pack.

134. Do not use the robot with another battery pack.

135. Do not use the robot with another battery pack.

136. Do not use the robot with another battery pack.

137. Do not use the robot with another battery pack.

138. Do not use the robot with another battery pack.

139. Do not use the robot with another battery pack.

140. Do not use the robot with another battery pack.

141. Do not use the robot with another battery pack.

142. Do not use the robot with another battery pack.

143. Do not use the robot with another battery pack.

144. Do not use the robot with another battery pack.

145. Do not use the robot with another battery pack.

146. Do not use the robot with another battery pack.

147. Do not use the robot with another battery pack.

148. Do not use the robot with another battery pack.

149. Do not use the robot with another battery pack.

150. Do not use the robot with another battery pack.

151. Do not use the robot with another battery pack.

152. Do not use the robot with another battery pack.

153. Do not use the robot with another battery pack.

154. Do not use the robot with another battery pack.

155. Do not use the robot with another battery pack.

156. Do not use the robot with another battery pack.

157. Do not use the robot with another battery pack.

158. Do not use the robot with another battery pack.

159. Do not use the robot with another battery pack.

160. Do not use the robot with another battery pack.

161. Do not use the robot with another battery pack.

162. Do not use the robot with another battery pack.

163. Do not use the robot with another battery pack.

164. Do not use the robot with another battery pack.

165. Do not use the robot with another battery pack.

166. Do not use the robot with another battery pack.

167. Do not use the robot with another battery pack.

168. Do not use the robot with another battery pack.

169. Do not use the robot with another battery pack.

170. Do not use the robot with another battery pack.

171. Do not use the robot with another battery pack.

172. Do not use the robot with another battery pack.

173. Do not use the robot with another battery pack.

174. Do not use the robot with another battery pack.

175. Do not use the robot with another battery pack.

176. Do not use the robot with another battery pack.

177. Do not use the robot with another battery pack.

178. Do not use the robot with another battery pack.

179. Do not use the robot with another battery pack.

180. Do not use the robot with another battery pack.

181. Do not use the robot with another battery pack.

182. Do not use the robot with another battery pack.

183. Do not use the robot with another battery pack.

184. Do not use the robot with another battery pack.

185. Do not use the robot with another battery pack.

186. Do not use the robot with another battery pack.

187. Do not use the robot with another battery pack.

188. Do not use the robot with another battery pack.

189. Do not use the robot with another battery pack.

190. Do not use the robot with another battery pack.

191. Do not use the robot with another battery pack.

192. Do not use the robot with another battery pack.

193. Do not use the robot with another battery pack.

194. Do not use the robot with another battery pack.

195. Do not use the robot with another battery pack.

196. Do not use the robot with another battery pack.

197. Do not use the robot with another battery pack.

198. Do not use the robot with another battery pack.

199. Do not use the robot with another battery pack.

200. Do not use the robot with another battery pack.

201. Do not use the robot with another battery pack.

202. Do not use the robot with another battery pack.

203. Do not use the robot with another battery pack.

204. Do not use the robot with another battery pack.

205. Do not use the robot with another battery pack.

206. Do not use the robot with another battery pack.

207. Do not use the robot with another battery pack.

208. Do not use the robot with another battery pack.

209. Do not use the robot with another battery pack.

210. Do not use the robot with another battery pack.

211. Do not use the robot with another battery pack.

212. Do not use the robot with another battery pack.

213. Do not use the robot with another battery pack.

214. Do not use the robot with another battery pack.

215. Do not use the robot with another battery pack.

216. Do not use the robot with another battery pack.

217. Do not use the robot with another battery pack.

218. Do not use the robot with another battery pack.

219. Do not use the robot with another battery pack.

220. Do not use the robot with another battery pack.

221. Do not use the robot with another battery pack.

222. Do not use the robot with another battery pack.

	<p>Manual de Usuario Aspiradora Robot Lefant M210P Manual de usuario completo para la aspiradora robot Lefant M210P, cubriendo instrucciones de seguridad, montaje, carga, uso, mantenimiento, solución de problemas y especificaciones técnicas. Optimizado para un rendimiento eficiente y una vida útil prolongada del dispositivo.</p>
---	--


Documents - LEFANT – M210P



[**Manual de Usuario Aspiradora Robot Lefant M210P**](#)

Manual de usuario completo para la aspiradora robot Lefant M210P, cubriendo instrucciones de seguridad, montaje, carga, uso, mantenimiento, solución de problemas y especificaciones técnicas. Optimizado para un rendimiento eficiente y una vida útil prolongada del dispositivo.

lang:es score:43 filesize: 6.43 M page_count: 21 document date: 2023-05-03

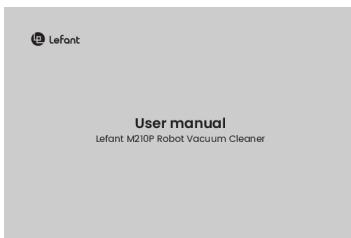

[**Lefant M210P Robot Vacuum Cleaner User Manual and Troubleshooting Guide**](#)

Comprehensive user manual for the Lefant M210P Robot Vacuum Cleaner, covering product introduction, assembly, charging, environment preparation, button functions, app configuration, maintenance, troubleshooting, technical specifications, and warranty information. Optimize your cleaning experience with this detailed guide.

lang:en score:43 filesize: 6.52 M page_count: 21 document date: 2022-08-02



[**Lefant M210P Robot Vacuum Cleaner User Manual**](#)

User manual for the Lefant M210P Robot Vacuum Cleaner, providing safety instructions, preparation guidelines, operating procedures, troubleshooting tips, and technical specifications.

lang:en score:39 filesize: 1.3 M page_count: 24 document date: 2023-03-28



[**\[pdf\] User Manual**](#)

Lefant M210P Official website Website lefant Email support eu@lephant Facebook @LEFANTOFFICIAL Community facebook groups LefantofficialcommunityC1PArUaaqZLm media amazon images I C1PArUaaqZL |||

Lea atentamente estas instrucciones antes de utilizar el producto y conservelas para un uso posterior ... CA Caja de polvo Filtro HEPA Robot aspirador Cepillo lateral Herramienta para limpieza Lefant **M210P** Robot Vacuum Cleaner User manual Benutzerhandbuch Manuel de I Utilisateur Manuale d uso ...


lang:es score:38 filesize: 6.43 M page_count: 21 document date: 2023-05-03



[**Lefant M210P Robot Vacuum Cleaner User Manual**](#)

Comprehensive user manual for the Lefant M210P Robot Vacuum Cleaner, covering setup, operation, maintenance, troubleshooting, and technical specifications.

lang:en score:33 filesize: 6.54 M page_count: 24 document date: 2025-03-18

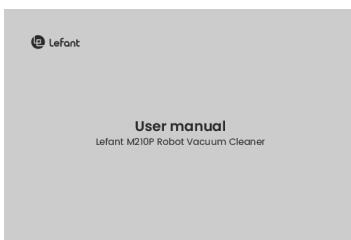

[**Lefant M210P Robot Vacuum Cleaner User Manual**](#)

Comprehensive user manual for the Lefant M210P Robot Vacuum Cleaner, covering setup, operation, maintenance, troubleshooting, and technical specifications.

lang:en score:33 filesize: 6.56 M page_count: 24 document date: 2022-09-02



[Lefant M210P Robot Vacuum Cleaner User Manual](#)

Comprehensive user manual for the Lefant M210P robot vacuum cleaner, covering setup, operation, maintenance, troubleshooting, and technical specifications. Learn how to use your robot vacuum for efficient cleaning.


lang:fr score:30 filesize: 1.34 M page_count: 18 document date: 2022-09-20



[Lefant Robot Vacuum Cleaner NIK User Manual](#)

Comprehensive user manual for the Lefant Robot Vacuum Cleaner NIK, detailing setup, operation, maintenance, troubleshooting, and safety instructions for optimal performance.

lang:en score:24 filesize: 2.62 M page_count: 24 document date: 2022-06-09

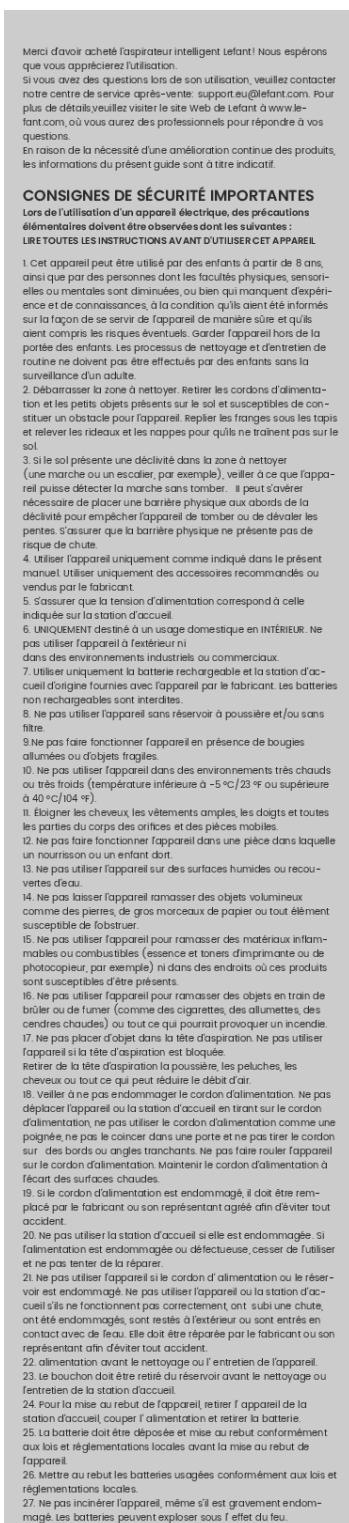

[Lefant M2 Series Robot Vacuum Cleaner User Manual](#)

User manual for the Lefant M2 Series robot vacuum cleaner, covering safety instructions, product overview, setup, operation, maintenance, troubleshooting, and technical specifications.

lang:fr score:21 filesize: 4.43 M page_count: 6 document date: 2023-05-29

28. Assurer que l'appareil n'est pas utilisé pendant une longue période.
 29. L'appareil doit être utilisé conformément aux instructions figurant dans ce manuel d'instructions. Notre compagnie ne peut être tenue responsable de tout dommage ou préjudice causé par une utilisation incorrecte.
 30. Le robot contient des batteries que seules des personnes qualifiées peuvent remplacer. Pour remplacer la batterie du robot, contacter le service clientèle.
 31. Mettre hors tension et ranger le robot s'il ne sera pas utilisé pendant une longue période. Débrancher la station d'accueil.
AVERTISSEMENT: Seule l'unité d'alimentation amovible fournie avec l'appareil doit être utilisée pour recharger la batterie.


CONSERVER CES INSTRUCTIONS

Afin de satisfaire aux exigences de sécurité de la FCC en matière d'exposition aux radiofréquences et aux circuits intégrés, une distance d'au moins 20 cm doit être maintenue entre cet appareil et les individus lorsque l'appareil est en fonctionnement. Pour veiller au respect de ces exigences, il n'est pas conseillé d'utiliser l'appareil à une distance inférieure à celle indiquée. L'antenne utilisée pour cet émetteur ne doit pas se trouver à proximité d'une autre antenne ou d'un autre émetteur.

	Transformateur isolé résistant aux courts-circuits
	Alimentation à découpage
	utiliser uniquement à l'intérieur
	courant continu
	courant alternatif
	unité d'alimentation amovible doit

Mise au rebut correcte de ce produit


Ce marquage indique que ce produit ne doit pas être jeté avec les autres déchets ménagers dans toute l'Union européenne. Pour prévenir d'éventuels dommages à l'environnement ou à la santé humaine suite au rejet non contrôlé des déchets, recycler l'appareil de façon responsable afin d'assurer la réutilisation durable de ses ressources matérielles. Pour recycler votre appareil usagé, merci d'utiliser le système de retour et de collecte ou de contacter le détaillant qui vous l'a vendu. Il peut recycler ce produit en toute sécurité.

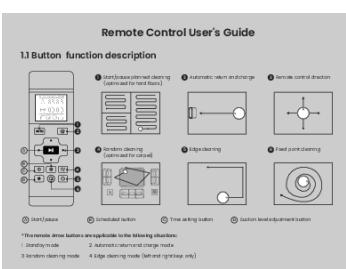

Robot Vacuum Remote Control User Guide

A comprehensive user guide for the robot vacuum remote control, detailing button functions, how to set the current time, and how to schedule and cancel cleaning appointments.


lang:en score:20 filesize: 488.24 K page_count: 3 document date: 2023-07-04

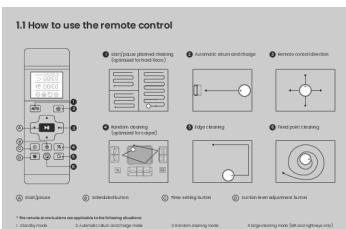

Lefant Robot Vacuum Remote Control Guide

Instructions on how to use the Lefant robot vacuum cleaner remote control, including setting time, scheduling cleaning, and different cleaning modes.


lang:en score:13 filesize: 257.79 K page_count: 3 document date: 2022-08-29

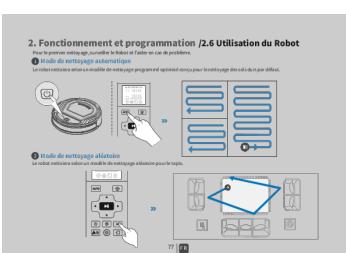

Guide Complet d'Utilisation et de Programmation du Robot Aspirateur

Découvrez comment utiliser et programmer votre robot aspirateur. Ce guide détaillé couvre les modes de nettoyage automatique, aléatoire, localisé et des bords, ainsi que la mise sous/hors tension, le contrôle de la puissance d'aspiration et le réglage du calendrier de nettoyage.

lang:fr score:12 filesize: 1017.43 K page_count: 5 document date: 2023-02-09

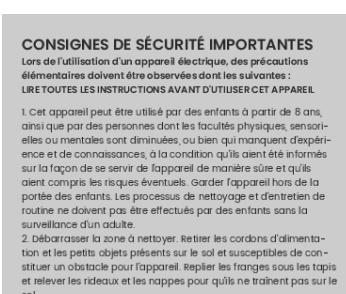

3. Si le sol présente une déclivité dans la zone à nettoyer (une marche ou un escalier, par exemple), veiller à ce que l'appareil puisse détecter la marche sans tomber. Il peut s'avérer nécessaire de placer une barrière physique aux abords de la déclivité pour empêcher l'appareil de tomber ou de dévaler les pentes. S'assurer que la barrière physique ne présente pas de risque de chute.

4. Utiliser l'appareil uniquement comme indiqué dans le présent manuel. Utiliser uniquement des accessoires recommandés ou vendus par le fabricant.

5. S'assurer que la tension d'alimentation correspond à celle indiquée sur la station d'accueil.

6. UNIQUEMENT destiné à un usage domestique en INTÉRIEUR. Ne pas utiliser l'appareil à l'extérieur ni dans des environnements industriels ou commerciaux.

7. Utiliser uniquement la batterie rechargeable et la station d'accueil d'origine fournies avec l'appareil par le fabricant. Les batteries non rechargeables sont interdites.

8. Ne pas utiliser l'appareil sans réservoir à poussière/et/ou sans filtre.

9. Ne pas faire fonctionner l'appareil en présence de bougies allumées ou d'objets fragiles.

10. Ne pas utiliser l'appareil dans des environnements très chauds ou très froids (température inférieure à -5 °C/23 °F ou supérieure à 40 °C/104 °F).

11. Éloigner les cheveux, les vêtements amples, les doigts et toutes les parties du corps des orifices et des pièces mobiles.

12. Ne pas faire fonctionner l'appareil dans une pièce dans laquelle un nourrisson ou un enfant dort.

13. Ne pas utiliser l'appareil sur des surfaces humides ou recouvertes d'eau.

14. Ne pas laisser l'appareil ramasser des objets volumineux comme des pierres, de gros morceaux de papier ou tout élément susceptible de bloquer.

15. Ne pas utiliser l'appareil pour ramasser des matériaux inflammables ou combustibles (essence et tonnes d'imprimante ou de photocopieur, par exemple) ni dans des endroits où ces produits sont susceptibles d'être présents.

16. Ne pas utiliser l'appareil pour ramasser des objets en train de brûler ou de fumer (comme des cigarettets, des allumettes, des cendres chaudes) ou tout ce qui pourrait provoquer un incendie.

17. Ne pas placer d'objet dans la tête d'aspiration. Ne pas utiliser l'appareil si la tête d'aspiration est bloquée.

Retirer de la tête d'aspiration la poussière, les peluches, les cheveux ou tout ce qui peut réduire le débit d'air.

18. Veiller à ne pas endommager le cordon d'alimentation. Ne pas déplacer l'appareil ou la station d'accueil en tirant sur le cordon d'alimentation, ne pas utiliser le cordon d'alimentation comme une poignée, ne pas le coincer dans une porte et ne pas tirer le cordon sur des bords ou angles tranchants. Ne pas faire rouler l'appareil sur le cordon d'alimentation. Maintenir le cordon d'alimentation à l'écart des surfaces chaudes.

19. Si le cordon d'alimentation est endommagé, il doit être remplacé par le fabricant ou son représentant agréé afin d'éviter tout accident.

20. Ne pas utiliser la station d'accueil si elle est endommagée. Si l'alimentation est endommagée ou défectueuse, cesser de l'utiliser et ne pas tenter de la réparer.

21. Ne pas utiliser l'appareil si le cordon d'alimentation ou le réservoir est endommagé. Ne pas utiliser l'appareil ou la station d'accueil s'ils ne fonctionnent pas correctement, ont subi une chute, ont été endommagés, sont restés à l'extérieur ou sont entrés en contact avec de l'eau. Elle doit être réparée par le fabricant ou son représentant afin d'éviter tout accident.

22. Nettoyage avant le nettoyage ou l'entretien de l'appareil.

23. Le bouchon doit être retiré du réservoir avant le nettoyage ou l'entretien de la station d'accueil.

24. Pour la mise au rebut de l'appareil, tester l'appareil de la station d'accueil, couper l'alimentation et retirer la batterie.

25. La batterie doit être déposée et mise au rebut conformément aux lois et réglementations locales avant la mise au rebut de l'appareil.

26. Mettre au rebut les batteries usagées conformément aux lois et réglementations locales.

27. Ne pas incinérer l'appareil, même s'il est gravement endommagé. Les batteries peuvent exploser sous l'effet du feu.

28. Débrancher la la station d'accueil si elle n'est pas utilisée pendant une longue période.

29. L'appareil doit être utilisé conformément aux instructions figurant dans ce manuel d'instructions. Notre compagnie ne peut être tenue responsable de tout dommage ou préjudice causé par une utilisation incorrecte.

30. Le robot contient des batteries que seules des personnes qualifiées peuvent remplacer. Pour remplacer la batterie du robot, contacter le service clientèle.

31. Mettre hors tension et ranger le robot s'il ne sera pas utilisé pendant une longue période. Débrancher la station d'accueil.

AVERTISSEMENT: Seule l'unité d'alimentation amovible fournie avec l'appareil doit être utilisée pour recharger la batterie.

CONSERVER CES INSTRUCTIONS

Afin de satisfaire aux exigences de sécurité de la FCC en matière d'exposition aux radiofréquences et aux circuits intégrés, une distance d'au moins 20 cm doit être maintenue entre cet appareil et les individus lorsque l'appareil est en fonctionnement. Pour veiller au respect de ces exigences, il n'est pas conseillé d'utiliser l'appareil à une distance inférieure à celle indiquée. L'antenne utilisée pour cet émetteur ne doit pas se trouver à proximité d'une autre antenne ou d'un autre émetteur.

	Transformateur d'isolation résistant aux courts-circuits
	Alimentation à découpage
	utiliser uniquement à l'intérieur
	Courant continu
	Courant alternatif
	unité d'alimentation amovible doit

Mise au rebut correcte de ce produit

Ce marquage indique que ce produit ne doit pas être jeté avec les autres déchets ménagers dans toute l'Union européenne. Pour prévenir d'éventuels dommages à l'environnement ou à la santé humaine suite au rejet non contrôlé des déchets, recycler l'appareil de façon responsable afin d'assurer la réutilisation durable de ses ressources matérielles. Pour recycler votre appareil usagé, merci d'utiliser le système de retour et de collecte ou de contacter le détaillant qui vous l'a vendu. Il peut recycler ce produit en toute sécurité.



WAŻNE INSTRUKCJE BEZPIECZEŃSTWA

OSTRZEŻENIE: Przeczytaj wszystkie ostrzeżenia i instrukcje bezpieczeństwa. Nieprzestrzeganie ostrzeżeń i instrukcji może spowodować porażenie prądem, pożar lub poważne obrażenia. PRZECZYTAJ WSZYSTKIE INSTRUKCJE PRZED UŻYCIEM TEGO URZĄDZENIA.

Tylko do użytku domowego.

Podczas korzystania z urządzenia elektrycznego zawsze należy przestrzegać podstawowych środków ostrożności, w tym następujących:

1. Przed każdym użyciem należy zainstalować zasilanie.

1. KROK 1: Wykryj zjawisko z niską temperaturą zasilania w tej instrukcji obsługi. Nasza firma nie ponosi odpowiedzialności za jakiekolwiek szkody lub obrażenia spowodowane niewłaściwym użytkowaniem.

2. Nie używaj urządzeń jako zabawki. Należy zachować szczególną ostrożność, gdy jest używane przez dzieci lub w ich pobliżu. Nie pozwól dzieciom siedzieć na odkurzaczu.

3. Przygotuj obszar do czyszczenia. Usuń przewody zasilające i małe przedmioty z podłogi, które mogłyby zapiąć się w robocie. schowaj frezle dywanu pod jego podstawkę i podnieś takie przedmioty jak zasłony i obusy z podłogi.

4. Jeśli w obszarze czyszczenia znajduje się spadek spowodowany schodami lub stopniem, należy obsłużywać robota aby upewnić się, że jest w stanie wykryć stopień i umieścić fizyczną barierę na krawędzi, aby zapobiec upadkowi urządzenia. Upewnić się, że fizyczna bariera nie stanowi przeszkody do potknięcia się.

5. Używaj tylko zgodnie z opisem w tej instrukcji. Używaj wyłącznie akcesoriów zalecanych lub sprzedawanych przez producenta.

6. Upewnić się, że napędzana zasilaniem odpowiadająca oznaczeniu na stacji dokujączej.

7. Nie dotykaj ani nie podłączaj urządzenia mokrymi rękami.

8. Nie używaj baterii, które nie mogą być ładowane.

9. Nie używaj urządzenia bez zamontowanej pojemnika na kurz i/lub filtrów.

10. Nie używaj robota w miejscu, gdzie są zapalone świece lub delikatne przedmioty na podłodze, który należy wyczyścić.

11. Nie używaj ani nie przechowuj urządzenia w ekstremalnie gorących lub zimnych warunkach (ponizej -5°C / 23°F lub powyżej 40°C / 104°F). Ładuj robota w temperaturze powyżej 0°C / 32°F i ponizej 40°C / 104°F. Postępuj zgodnie ze wszystkimi instrukcjami ładowania i nie ładuj baterii ani urządzenia poza zakresem temperatury określonym w instrukcjach. Nieprawidłowe ładowanie lub ładowanie w temperaturach poza określonym zakresem może uszkodzić baterię i zwiększyć ryzyko pożaru.

12. Trzymaj włosy, luźne ubrania, palce i wszystkie części ciała z dala od otworów i ruchomych części.

13. Nie używaj robota w pokoju, w którym śpi niemowlę lub dziecko.

14. Tylko do użytku wewnętrznego. Nie używaj robota na zewnątrz, w środowiskach komercyjnych ani przemysłowych. Nie używaj urządzenia na wilgotnych powierzchniach ani na powierzchniach z stojącą wodą.

15. Nie pozwól robotowi zbierać dużych przedmiotów, takich jak kamienie, duże kawałki papieru ani innych przedmiotów, które mogą zatknąć robota.

16. Nie używaj robota do zbierania materiałów łatwopalnych lub palnych, takich jak benzyna, toner do drukarek lub kserkopisarek, ani w miejscach, gdzie mogą być obecne.

17. Nie używaj robota do zbierania rąszy, które się palą lub dymią, takich jak papierosy, zapaliki, gorce popioły ani innych przedmiotów, które mogą spowodować pożar.

18. Nie wkładaj żadnych przedmiotów do otworów. Nie używaj urządzenia z zablokowanymi otwarami; utrzymuj je wolne od kurzu, kłaczków, włosów i wszystkiego, co może ograniczać przepływ powietrza.

19. Zadbaj o to, aby nie uszkodzić przewodu zasilającego. Nie ciągnij ani nie przenosz baterii ani stacji dokujączej za pomocą przewodu zasilającego, nie używaj przewodu zasilającego jako uchwytu, nie zamknią drzwi na przewodzie zasilającym, ani nie przeciągaj przewodu pookół ostrzych krawędzi lub narowników. Nie przeciągaj robota po przewodzie zasilającym. Trzymaj przewód zasilający z dala od gorących powierzchni. Nie wyciągaj wtyczki, ciągnąc za przewód. Aby odłączyć, chwycią wtyczkę, a nie przewód.

20. Jeśli przewód zasilający jest uszkodzony, musi być wymieniony przez producenta lub jego przedstawiciela serwisowego, aby uniknąć zagrożeń.

21. Nie używaj stacji dokujączej, jeśli jest uszkodzona.

22. Nie używaj robota ani stacji dokujączej, jeśli nie działa prawidłowo, zostały upuszczone, uszkodzone, pozuwane na zewnątrz lub miały kontakt z wodą. Muszą być naprawione przez producenta lub jego przedstawiciela serwisowego, aby uniknąć zagrożeń.

23. Wyłącz przełącznik zasilania przed czyszczeniem lub konserwacją robota. Wyłącz wszystkie ustawienia.

24. Wtyczka musi być wyjęta z gniazda przed czyszczeniem lub konserwacją stacji dokujączej.

25. Usuń robotę ze stacji dokujączej i wyłącz przełącznik zasilania urządzenia przed wyjęciem baterii w celu pozytywu się robota.

26. Bateria musi zostać usunięta i wyizolowana zgodnie z lokalnymi przepisami przed pozytywem się robota.

27. Proszę wyrazić zuzupe baterie zgodnie z lokalnymi przepisami i regulacjami.

28. Nie spakuj robota, nawet jeśli jest poważnie uszkodzony. Akumulatory mogą wybuchnąć w ogniu.

29. Jeśli nie używasz stacji dokującej przez dłuższy czas, odłącz ją od zasilania.

30. Zapołoguj się z zamienionemu uruchomieniu. Upewnić się, że przełącznik jest w pozycji wyłączonej przed podłączeniem do akumulatora, podniesieniem lub przeniesieniem urządzenia. Nosiennie robota z palcem na przełączniku lub uruchamianie robota, który ma przełącznik włączony, może prowadzić do wypadków.

31. Kiedy akumulator nie jest używany, trzymaj go z dala od innych metalowych przedmiotów, takich jak spinacze, monety, klucze, gwiazdki, śruby itp., które mogą stworzyć połączenie między zaciskami. Zaciśnięcie zacisków akumulatora może spowodować oparzenia lub pożar.

32. W warunkach radzących ciecz może zostać wyizolowana z akumulatorem, unikając kontaktu. Jeśli ciecz dostanie się do oczu, dodatkowo szukaj pomocy medycznej. Ciecz wydobywająca się z akumulatora może powodować podrażnienia lub oparzenia.

33. Nie używaj akumulatora, który jest uszkodzony lub zmotyfikowany. Uszkodzone lub zmotyfikowane akumulatory mogą wykazywać nieprzewidziane zachowanie, co może prowadzić do pożaru, eksplozji lub ryzyka obrażeń.

34. Nie wystawiaj akumulatora ani urządzenia na działanie ognia lub wysokich temperatur. Naranżenie na ogień lub temperatury powyżej 130°C/265°F może spowodować eksplozję.

35. Naprawy powinny być przeprowadzane przez wykwalifikowanego technika, używając tylko identycznych części zamiennych.

36. Nie modyfikuj ani nie próbuj naprawiać robota ani akumulatora (jeśli dotyczy), poza przypadkami wskazanymi w instrukcjach.

37. Nie używaj robota w pomieszczeniu, w którym znajdują się zapalone świece na meblach, które robot może przypadkowo uderzyć lub potrącić.

38. Ładuj akumulator tylko za pomocą ładowarki określonej przez producenta. Ładowarka odpowiednia dla jednego rodzaju akumulatora może stwarzać ryzyko pożaru, gdy jest używana z innym akumulatorem.

39. Używaj robota tylko z akumulatorami wyznaczonymi jako kompatybilne. Użycie innych akumulatorów może stwarzać ryzyko obrażeń i pożaru.

40. Robot zawiera akumulatory, które mogą być wymieniane tylko przez wykwalifikowane osoby. Aby wymienić akumulator robota, skontaktuj się z obsługą klienta.

41. jeśli robot nie będzie używany przez dłuższy czas, w pełni go rozładowaj, wyłącz zasilanie i odłącz stację dokującą.

ZACHOWAJ TE INSTRUKCJE

Aby spełnić wymagania dotyczące ekspozycji na fale radiowe, należy utrzymywać odległość co najmniej 20 cm między tym urządzeniem a osobami podczas jego pracy. Aby zapewnić zgodność, nie zaleca się używania urządzenia w odległości mniejszej niż Antena używana w tym nadajniku nie może być umieszczona w pobliżu żadnej innej anteny lub nadajnika.

	Bezpieczny transformator izolowany, odporny na zwiarcia
	Zasilacz z przełącznikiem trybu
	Tylko do użytku wewnętrznego
	Przed stały
	Przed zmienne
	Wymienny moduł zasilania

Important Safety Instructions for Robot Vacuum Cleaner

This document provides essential safety instructions for operating a robot vacuum cleaner. It covers warnings, precautions, and guidelines for safe usage, charging, maintenance, and disposal to prevent accidents and ensure proper functioning.

lang:pl score:10 filesize: 472 K page_count: 1 document date: 2024-09-06

Prawidłowa utylizacja tego produktu

Ten znak oznacza, że produkt ten nie powinien być usuwany wraz z innymi odpadami komunalnymi w całej UE. Aby zapobiec możliwemu zagrożeniu dla środowiska lub zdrowia ludzi wynikającemu z niekontrolowanej utylizacji odpadów, należy poddać go recyklingowi w sposób odpowiedzialny, aby wspierać zrównoważony ponowny wykorzystanie zasobów materiałowych. Aby zatyciować używanie urządzeń, proszę skorzystać z systemów zwrotu i zbiórki lub skontaktować się z sprzedawcą, u którego produkt został zakupiony. Mogą oni bezpiecznie przeprowadzić recykling tego produktu.

