

## VEVOR SSPS-02-US

# VEVOR 63-inch 9-Tier Plant Stand with Grow Lights User Manual

Model: SSPS-02-US

## INTRODUCTION

---

This manual provides essential information for the safe and efficient use of your VEVOR 63-inch 9-Tier Plant Stand with Grow Lights. This indoor plant stand features a 63-inch tall, 9-tier design with 2 hooks, offering ample space for various plants. It includes three full-spectrum grow lights with adjustable timer settings (3H/9H/12H) and 10 brightness levels to support plant growth. Constructed with 0.85 mm powder-coated iron tubing and reinforced particle boards, it ensures durability and stability. Please read these instructions carefully before assembly and operation.

## SAFETY INFORMATION

---

- Ensure all connections are secure before placing plants or other items on the stand.
- This plant stand is designed for indoor use only.
- To prevent tipping, especially in households with children or pets, secure the plant stand to a wall using the provided anti-tip straps.
- Do not overload the shelves. Refer to the specifications for weight limits if available.
- Keep electrical components (grow lights, adapter) away from direct water exposure, despite the waterproof board coating.
- Unplug the grow lights from the power source before cleaning or performing any maintenance.
- Do not attempt to modify the product or its electrical components. Use only the provided adapter and grow lights.

## PACKAGE CONTENTS

---

Verify that all components are present before beginning assembly:

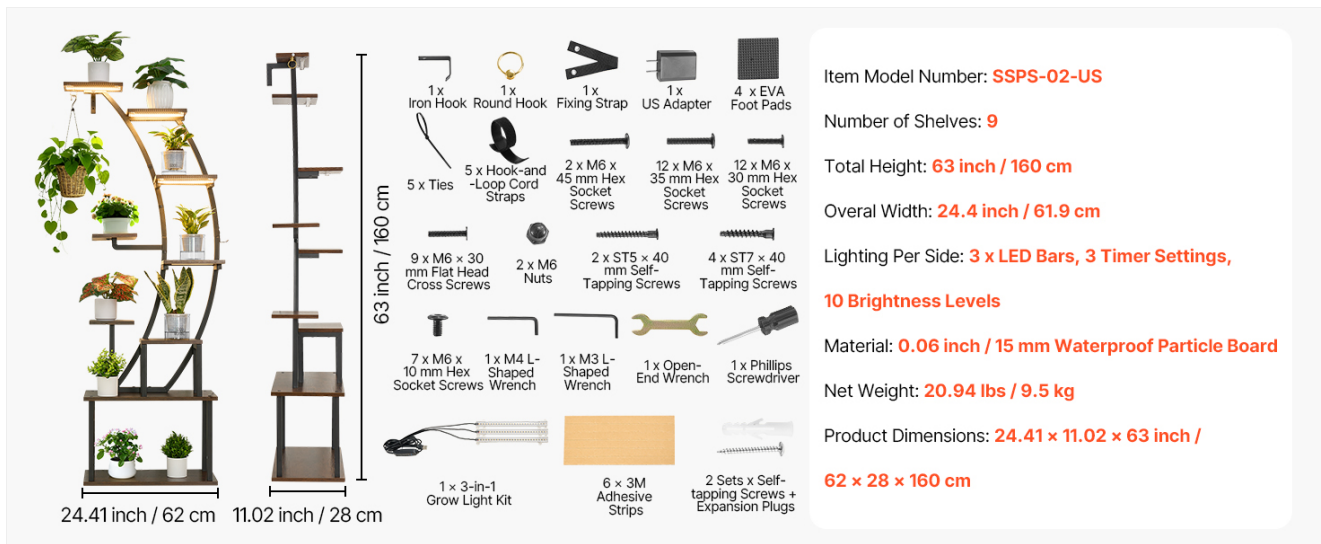


Image: Detailed diagram of all included parts and tools for assembly.

- Iron Frame Components
- Wooden Shelf Boards (9 tiers)
- 3-in-1 Grow Light Kit (3 LED bars)
- US Power Adapter
- Fasteners: M6 x 45 mm Hex Socket Screws, M6 x 35 mm Hex Socket Screws, M6 x 30 mm Flat Head Cross Screws, M6 Nuts, STS x 40 mm Self-Tapping Screws
- Accessories: Iron Hook, Round Hook, Fixing Strap, EVA Foot Pads, Hook-and-Loop Cord Straps, 3M Adhesive Strips, Self-tapping Screws + Expansion Plugs (for wall mounting)
- Tools: M4 L-Shaped Wrench, Open-End Wrench, Philips Screwdriver

## ASSEMBLY INSTRUCTIONS

Assembly is required. Follow the steps below using the provided tools. It is recommended to assemble the stand on a soft, clean surface to prevent scratches.

# Easy to Assemble

All Accessories & Tools Included

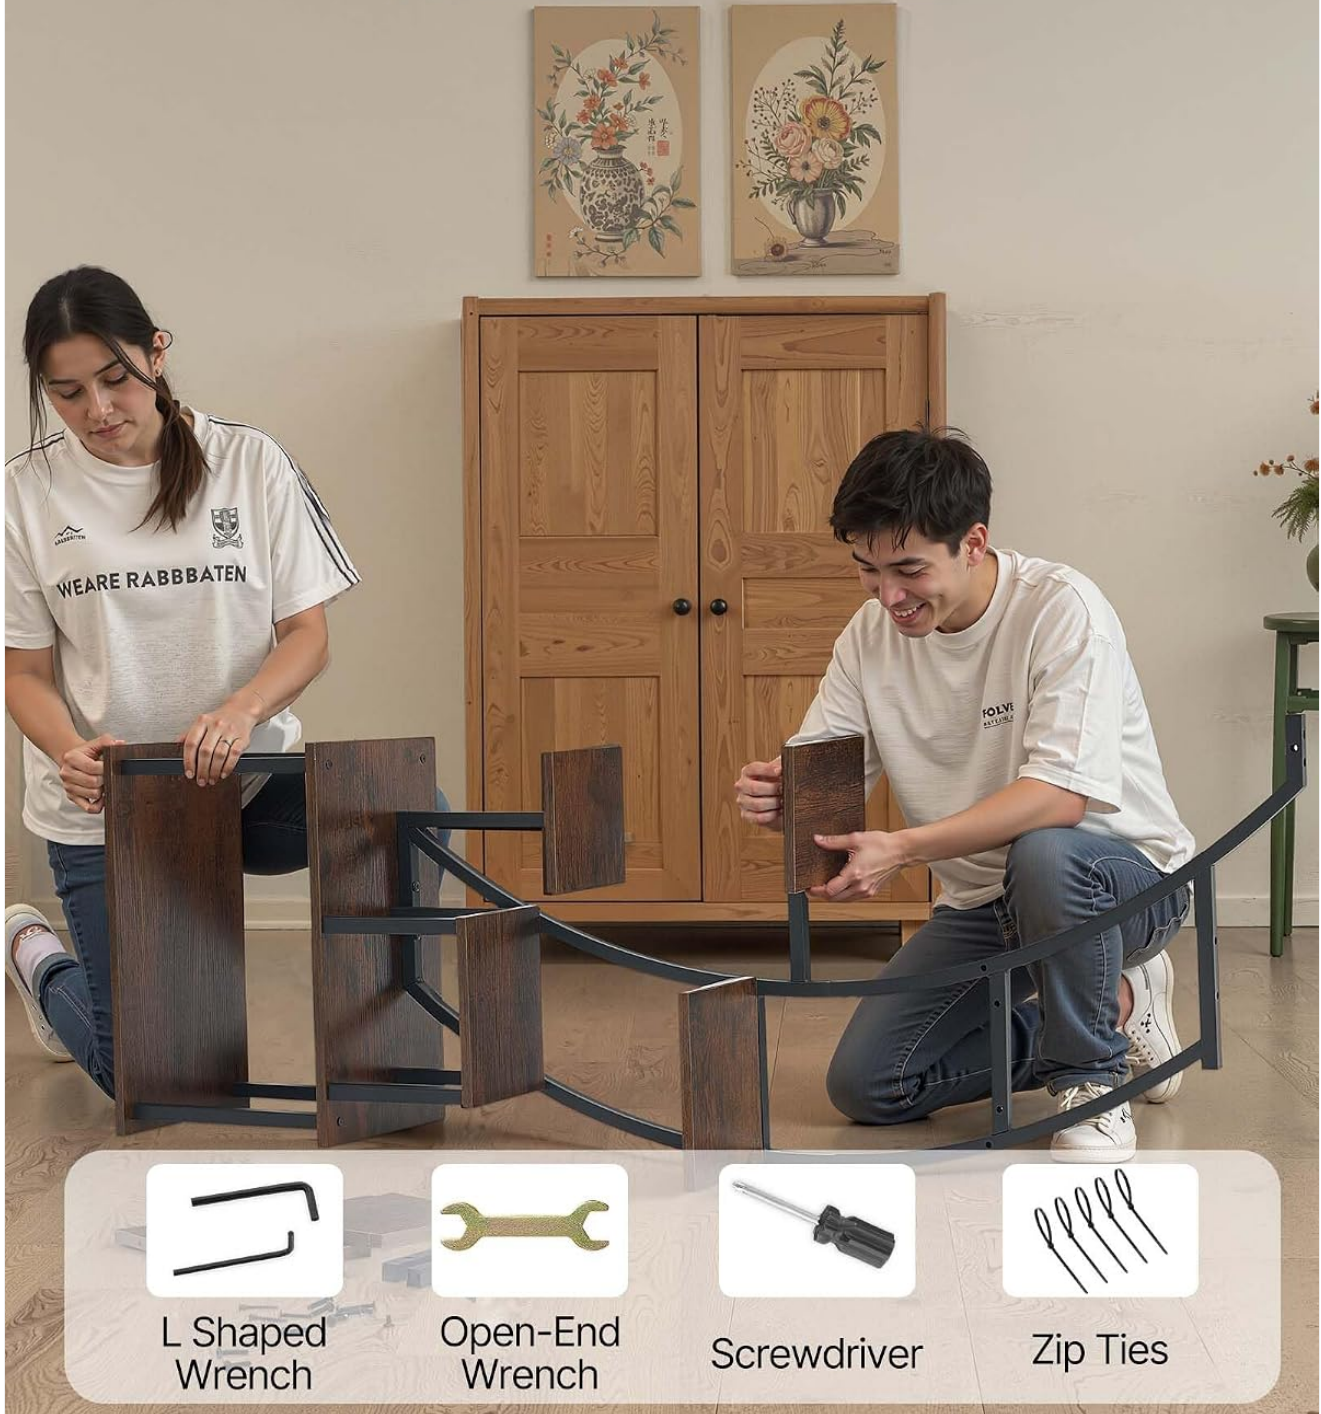


Image: Fully assembled VEVOR plant stand with plants.

- 1. Unpack Components:** Carefully remove all parts from the packaging and lay them out. Check against the 'Package Contents' list.
- 2. Assemble Base Frame:** Connect the base iron frame pieces using the appropriate screws and wrenches. Ensure all connections are finger-tight initially.
- 3. Attach Vertical Supports:** Secure the main vertical support structures to the base.
- 4. Install Shelf Boards:** Attach the wooden shelf boards to the frame at their designated positions. Ensure they are level and secure.
- 5. Install Grow Lights:** Mount the 3-in-1 grow light kit to the designated areas on the frame. Route the cables neatly

using the hook-and-loop cord straps.

- Tighten All Screws:** Once the entire structure is assembled, go back and securely tighten all screws with the provided tools. Do not overtighten.
- Attach Foot Pads:** Apply the EVA foot pads to the bottom of the stand to protect your floor.
- Secure to Wall:** For stability and safety, especially in homes with children or pets, use the provided fixing strap, self-tapping screws, and expansion plugs to secure the top of the plant stand to a wall.
- Connect Power:** Plug the grow light adapter into a suitable power outlet.

## OPERATING INSTRUCTIONS (GROW LIGHTS)

The integrated grow lights provide full-spectrum illumination to support plant growth. Control them using the push-button controller.



Image: Grow light timer and brightness settings.

### Timer Settings

The grow lights feature three timer settings for automatic operation:

- **3H:** Lights will stay on for 3 hours and then turn off automatically.
- **9H:** Lights will stay on for 9 hours and then turn off automatically.
- **12H:** Lights will stay on for 12 hours and then turn off automatically.

To activate a timer, press the timer button on the controller until the desired duration is selected. The lights will cycle on and off daily at the set interval.

### Brightness Levels

Adjust the light intensity to suit your plants' needs with 10 available brightness levels:

- Press the brightness adjustment buttons (usually '+' and '-') on the controller to increase or decrease the light intensity from 10% to 100%.
- Select the optimal brightness based on your plant species and growth stage.

## MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your plant stand.

- **Cleaning:** Wipe down the iron frame and wooden shelves with a soft, damp cloth. The powder-coated iron tubing and waterproof particle boards are designed for easy cleaning and resistance to rust and corrosion. Avoid abrasive

cleaners.

- **Dusting Grow Lights:** Gently wipe the LED bars with a dry, soft cloth to remove dust, which can impede light output. Ensure the lights are unplugged before cleaning.
- **Check Connections:** Periodically inspect all screws and connections to ensure they remain tight. Retighten if necessary.
- **Inspect Cables:** Check the grow light cables for any signs of wear or damage. If damage is found, discontinue use and contact support.

## TROUBLESHOOTING

If you encounter issues with your plant stand, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Grow lights do not turn on.	Power adapter not plugged in; loose connection; faulty adapter/lights.	Ensure the power adapter is securely plugged into a working outlet. Check all cable connections. If problem persists, contact customer support.
Lights are dim or inconsistent.	Brightness level set too low; dust on LED bars.	Increase the brightness level using the controller. Clean the LED bars gently with a dry cloth.
Plant stand feels unstable.	Screws are loose; not secured to wall.	Check and tighten all assembly screws. Ensure the stand is properly secured to the wall using the provided anti-tip kit.
Timer function not working.	Incorrect timer setting; power interruption.	Verify the correct timer setting is selected on the controller. If power was interrupted, reset the timer.

## SPECIFICATIONS



Image: Product dimensions and specifications diagram.

Feature	Detail
Brand	VEVOR
Model Number	SSPS-02-US
Material	Iron (0.85 mm tubing), 15 mm Waterproof Particle Board
Overall Dimensions (L x W x H)	24.41" x 11.02" x 63" (62 cm x 28 cm x 160 cm)
Net Weight	20.94 lbs (9.5 kg)
Number of Shelves	9
Grow Lights	3 Full-Spectrum LED Bars
Timer Settings	3 (3H, 9H, 12H)

Feature	Detail
Brightness Levels	10
Power Source	Corded Electric
Control Method	Push Button
Indoor/Outdoor Usage	Indoor
Required Assembly	Yes

## WARRANTY AND SUPPORT

---

**Manufacturer Warranty:** The manufacturer warranty description states "None." Please refer to your retailer's return policy for details on returns or exchanges.

**Customer Support:** For any questions, missing parts, or assistance with assembly or operation, please contact VEVOR customer service through their official website or the retailer where the product was purchased. You can visit the official VEVOR store at [VEVOR Store](#).