

HelloBaby HB6560

HelloBaby HB6560 Baby Monitor with Floor Stand Instruction Manual

INTRODUCTION

The HelloBaby HB6560 Baby Monitor offers advanced features for monitoring your child. This system includes a 6-inch IPS screen for clear viewing, a camera with remote pan and tilt, two-way audio, and infrared night vision. Designed for security, it operates without WiFi, ensuring a private connection. The included floor stand provides flexible placement options, and the monitor boasts a long battery life for extended use.

SETUP

Floor Stand Assembly

The HelloBaby HB6560 comes with a convenient floor stand for optimal camera placement. Follow these steps to assemble the stand:

1. Attach the first pole segment securely to the base of the stand.
2. Connect the remaining pole segments by twisting them together until they are firmly joined.
3. Attach the flexible gooseneck arm to the top pole segment.
4. Locate the camera mounting screw on the camera's base and align it with the flexible arm's connector.
5. Screw the camera onto the flexible arm until it is securely attached.

Your browser does not support the video tag.

This video demonstrates the step-by-step assembly of the HelloBaby baby monitor floor stand.

Camera and Monitor Placement

Place the camera on a flat, stable surface using the floor stand. Ensure the camera has a clear, unobstructed view of your baby. Position the monitor unit in a convenient location where you can easily view the screen and hear audio.



The HelloBaby baby monitor camera mounted on its adjustable floor stand next to a baby crib.

Power Connection

Connect the power adapters to both the camera unit and the monitor unit. Plug the adapters into a standard electrical outlet. The monitor unit has a built-in rechargeable battery for portable use.

OPERATING INSTRUCTIONS

Power On/Off

Press and hold the power button on both the camera and monitor units to turn them on or off.

Screen Features

The 6-inch IPS screen provides a wide 178° viewing angle and clear visuals. The monitor automatically connects to the camera upon powering on.



The HelloBaby monitor screen displaying a sleeping baby, highlighting the 6-inch IPS display.


Remote Pan/Tilt

Use the directional buttons on the monitor to remotely pan the camera 355° horizontally and tilt it 120° vertically, ensuring no blind spots.

Two-Way Talk

Press and hold the microphone button on the monitor to speak to your baby through the camera's speaker. Release the button to listen.

Clear Two-way Audio

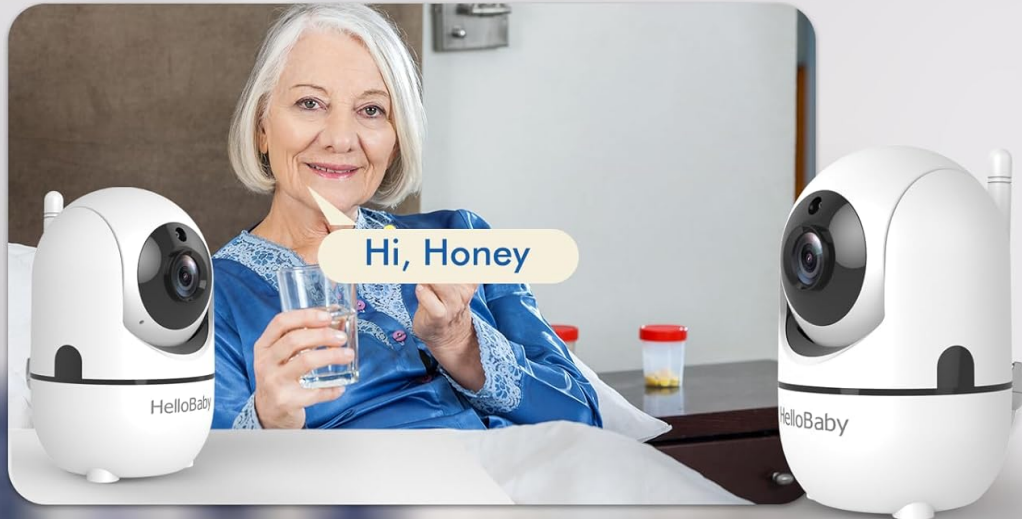

An image illustrating the two-way audio feature of the HelloBaby monitor, showing a parent speaking to their baby through the monitor.

Night Vision

The camera features automatic infrared night vision, providing clear black and white video in low-light conditions.

Lullabies

Select from a variety of pre-programmed lullabies to soothe your baby. Access this feature through the monitor's menu.

ECO Mode

Activate ECO mode to conserve battery life. In this mode, the screen turns off when no sound is detected, and turns back on when your baby makes a noise.

Split Screen

If using multiple cameras (sold separately), the monitor supports split-screen viewing to monitor two areas simultaneously.

6-inch Super Wide Viewing Baby Monitor



The HelloBaby monitor displaying a split screen view from two different cameras simultaneously.

Language Support

The monitor supports up to 150 national languages, which can be selected from the settings menu.

Feeding Timer

Set a feeding timer reminder through the monitor's menu to help manage your baby's feeding schedule.

Temperature Sensor

The camera includes a room temperature sensor, displaying the current temperature on the monitor screen.

Your browser does not support the video tag.

This video highlights key features of the HelloBaby HB6560 monitor, including remote pan/tilt, night vision, lullabies, two-way audio, battery life, language support, and split screen functionality.

MAINTENANCE

Cleaning

Wipe the camera and monitor units with a soft, dry cloth. Do not use abrasive cleaners or solvents. Ensure the devices are powered off before cleaning.

Storage

Store the monitor and camera in a cool, dry place when not in use. Keep away from direct sunlight and extreme temperatures.

TROUBLESHOOTING

No Picture/Sound

- Ensure both the camera and monitor are powered on and fully charged or connected to power.
- Check that the camera and monitor are within range. Obstacles like walls can reduce signal strength.
- Try re-pairing the camera and monitor if the connection is lost (refer to pairing instructions in the full manual).

Poor Picture Quality

- Adjust the camera's position to ensure adequate lighting.
- Clean the camera lens if it appears blurry.

Short Battery Life

- Ensure the monitor is fully charged before use. Battery life varies based on usage (e.g., continuous video vs. ECO mode).
- Reduce screen brightness or activate ECO mode to extend battery life.

SPECIFICATIONS

Feature	Description
Brand	HelloBaby
Model	HB6560
Screen Size	6-inch IPS
Viewing Angle	178°
Camera Pan	355°
Camera Tilt	120°

Battery Life	16-30 hours (video screen / ECO mode)
Connectivity	2.4GHz Digital Wireless (No WiFi)
Additional Features	Two-way talk, Night Vision, Lullabies, Split Screen, Temperature Sensor, Feeding Timer, Multi-language support

WARRANTY

The HelloBaby HB6560 Baby Monitor includes a 1-year manufacturer's guarantee from the date of purchase. Please retain your proof of purchase for warranty claims. This warranty covers defects in materials and workmanship under normal use.

SUPPORT

For technical assistance, troubleshooting, or warranty inquiries, please contact HelloBaby customer support. Refer to the contact information provided in your product packaging or visit the official HelloBaby website.