

[Manuals.plus](#) /

› [ZSCMALLS](#) /

› ZSCMALLS 15.6" 1080P Portable Monitor User Manual

ZSCMALLS ZSC-A15

ZSCMALLS 15.6" 1080P Portable Monitor User Manual

Model: ZSC-A15

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, maintenance, and troubleshooting of your ZSCMALLS 15.6" 1080P Portable Monitor (Model ZSC-A15). This versatile extended display is designed to enhance productivity and entertainment across various devices, including laptops, PCs, gaming consoles, and mobile phones. Please read this manual thoroughly before using the product to ensure optimal performance and longevity.

2. PACKAGE CONTENTS

Please verify that all items are present in your package:

- ZSCMALLS 15.6" Portable Monitor
- Protective Cover / Smart Stand
- Adjustable Monitor Stand
- USB-C to USB-C Cable
- Mini HDMI to HDMI Cable
- USB-A to USB-C Power Cable
- Power Adapter
- Stylus Pen
- User Manual

3. PRODUCT FEATURES

- **Ultra-Thin and Portable Design:** With a thickness of only 0.35 inches and weighing 1.36 lbs, this

monitor is designed for easy portability.

- **1080P Full HD IPS Display:** Features a 15.6-inch IPS screen with 1920x1080 resolution, offering clear visuals and accurate color reproduction.
- **Versatile Connectivity:** Equipped with USB-C, Mini HDMI, and USB ports for broad compatibility with various devices.
- **Integrated Speakers:** Provides audio output without external speakers.
- **Smart Protective Cover:** Doubles as a multi-position stand for flexible viewing angles.
- **Front Button Control:** Features easily accessible front buttons for menu navigation and settings adjustment.
- **Pencil Hole Design:** Allows for an alternative stand using a stylus or similar object (pencil included).
- **VESA Mounting:** Supports 75x75mm VESA mounts for flexible installation options.

Flexible Display Modes for Work & Play

Use as a second Mac/Laptop/PC display, extend your workspace, or duplicate screens for easy presentations. When your PC is off, it can even act as your main screen, making work and entertainment smoother with reduced eye strain.

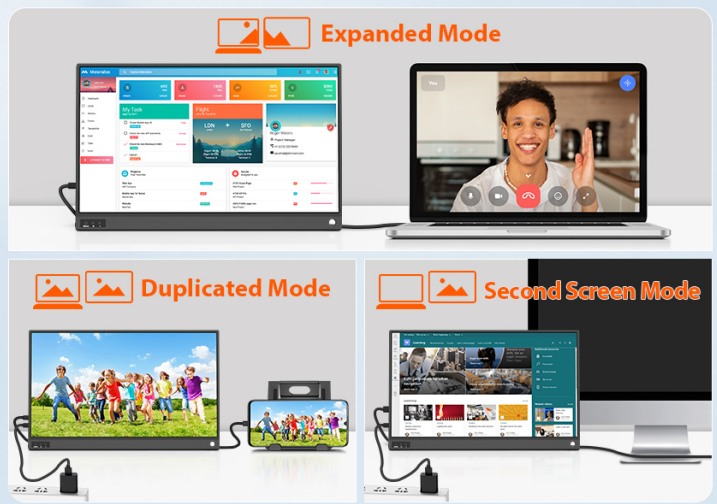


Image: Overview of the ZSCMALLS 15.6" 1080P Portable Monitor highlighting its key specifications and features.

Sharing Business Anytime, Anywhere

Work productively on business trips and make traveling easier with an ultra-lightweight monitor that fits comfortably in your carry-on bag



Image: Illustration of the 2025 upgraded front button design for improved user experience.

Travel Ready Portable Monitor

You can easily put it into a briefcase or computer bag, making it the ideal travel companion for a laptop and maximizing your productivity while you travel.



Image: Detailed view of the monitor's ports and controls.

4. SETUP

4.1 Connecting the Monitor

The ZSCMALLS portable monitor offers flexible connection options depending on your device's capabilities.



Image: Visual guide for connecting the monitor using Type-C or HDMI with power.

Method 1: Single USB-C Cable Connection (Full-featured Type-C Port Required)

1. Ensure your laptop or device has a full-featured Type-C port that supports video output (DisplayPort Alternate Mode) and power delivery.
2. Connect one end of the USB-C to USB-C cable to your device's full-featured Type-C port.
3. Connect the other end of the USB-C to USB-C cable to the Type-C interface on the monitor. Do not connect to the DC IN port for this method.
4. The monitor should automatically detect the signal and power on.

Method 2: HDMI and Power Connection

1. Connect one end of the Mini HDMI to HDMI cable to your device's HDMI port.
2. Connect the Mini HDMI end of the cable to the Mini HD Port on the monitor.
3. Connect the USB-A to USB-C power cable to the DC IN port on the monitor.
4. Connect the USB-A end of the power cable to a power adapter (included) and plug it into a wall outlet, or to a powered USB-A port on your device.

5. The monitor will power on and display the signal from your device.

4.2 Using the Monitor Stand

The monitor comes with an adjustable stand for various viewing angles.

Image: Step-by-step guide for assembling and adjusting the monitor stand.

1. **Step 1:** Lay the stand flat on a desk with its face upward.
2. **Step 2:** Open the stand upwards and secure it in any desired groove position. The stand has 10 built-in adjustment angle grooves.
3. **Step 3:** Place the monitor correctly on the stand.

Note: Do not lift the stand directly by the monitor, or it may become stuck and unadjustable.

4.3 Alternative Stand Method (Pencil Hole)

In situations where the stand is not available, you can use the included stylus pen or a similar object to prop up the monitor.



Image: The monitor using a pencil as a stand, showcasing the pencil hole feature.

Insert the stylus pen into the designated pencil hole on the side of the monitor to provide a stable base.

5. OPERATING THE MONITOR

5.1 Power On/Off

Press the 'Menu - Power & Return' button located on the front of the monitor to power it on or off.

5.2 On-Screen Display (OSD) Menu

Use the front buttons (+, -, Menu) to navigate and adjust monitor settings:

- **Menu Button:** Press to open the OSD menu. Press again to confirm selections or return to the previous menu.
- **'+' Button:** Navigate up or increase values in the OSD menu.
- **'-' Button:** Navigate down or decrease values in the OSD menu.

5.3 Display Modes

The monitor supports various display modes to suit your needs:



Image: Examples of Portrait, Expanded, and Mirror display modes.

- **Expanded Mode:** Extends your primary display, providing more screen real estate for multitasking.
- **Mirror Mode (Duplicated Mode):** Duplicates your primary display, showing the same content on both screens. Ideal for presentations.
- **Portrait Mode:** Rotates the display vertically, useful for coding, document viewing, or social media feeds.
- **Second Screen Mode:** Uses the portable monitor as the sole display when your primary device's screen is off.

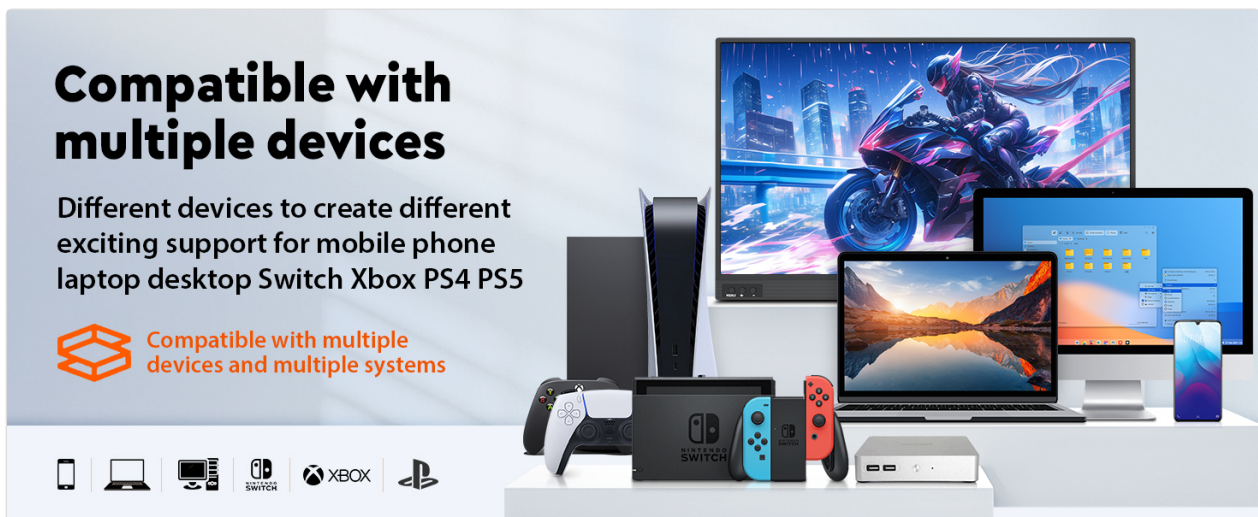


Image: Switching between Landscape and Portrait display modes.

5.4 Color Settings

The monitor supports 16.7 million colors with 8-bit color production. You can customize color settings via the OSD menu to adjust warm and cool tones to your preference.

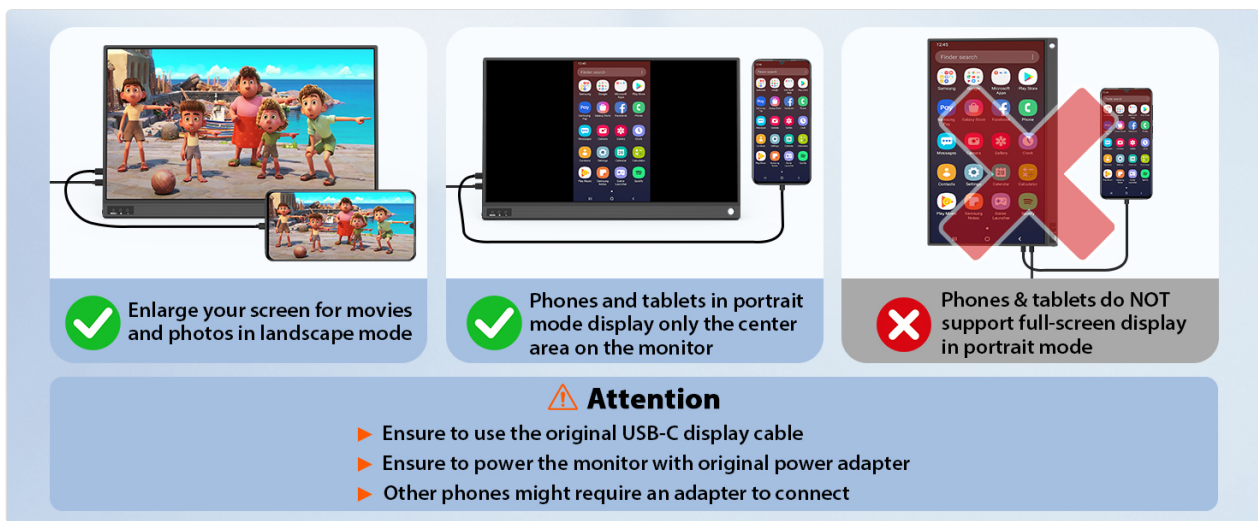


Image: Customizable color settings for personalized viewing.

6. MAINTENANCE

To ensure the longevity and optimal performance of your ZSCMALLS Portable Monitor, follow these maintenance guidelines:

- **Cleaning the Screen:** Gently wipe the screen with a soft, lint-free cloth. For stubborn smudges, slightly dampen the cloth with water or a screen-specific cleaning solution. Avoid using harsh chemicals, alcohol, or abrasive materials.
- **Cleaning the Body:** Use a soft, dry cloth to clean the monitor's casing.
- **Storage:** When not in use, store the monitor in its protective cover in a cool, dry place away from direct sunlight and extreme temperatures.
- **Handling:** Avoid dropping the monitor or subjecting it to strong impacts. Do not place heavy objects on top of it.
- **Ventilation:** Ensure the monitor's ventilation openings are not blocked to prevent overheating.

7. TROUBLESHOOTING

7.1 No Signal / Black Screen

- **Check Cable Connections:** Ensure all cables (USB-C, HDMI, power) are securely connected to both the monitor and your device.
- **Verify Power:** Confirm the monitor is receiving power. If using HDMI, ensure the DC IN port is connected to a power source.
- **Source Selection:** Use the OSD menu to manually select the correct input source (USB-C or HDMI).
- **Device Output:** Ensure your connected device (laptop, PC, console) is configured to output video to an external display. Try pressing Windows Key + P on Windows or checking Display Settings on macOS.

7.2 Compatibility Issues

Image: Guide to identifying full-featured Type-C ports for monitor compatibility.

- **USB-C Port Functionality:** For single-cable USB-C connection, your laptop's Type-C port must be full-featured, supporting Thunderbolt 3/4, Data + Video Transfer, or Data + DisplayPort Alt Mode. Ports that are 'Only Data Transfer' or 'Only Charging' will not work for video output.

- **Phone/Tablet Display:** Phones and tablets typically support full-screen display in landscape mode. In portrait mode, they may only display the center area on the monitor and might not support full-screen display.

Image: Important notes on phone/tablet display and cable usage.

- **Cable Quality:** Always use the original USB-C display cable and power adapter provided with the monitor. Other cables or adapters may not provide sufficient power or data transfer capabilities.
- **Adapters:** Some devices may require an additional adapter to connect to the monitor.

8. SPECIFICATIONS

Feature	Specification
Model Number	ZSC-A15
Screen Size	15.6 Inches
Resolution	1920 x 1080 Pixels (FHD 1080p)
Aspect Ratio	16:9
Image Brightness	250 Candela (nits)
Screen Surface Description	Matte
Product Dimensions	14.01 x 8.82 x 0.35 inches
Item Weight	2.57 pounds
Total USB Ports	1 (Type-C Full-feature)

9. WARRANTY AND SUPPORT

ZSCMALLS products are designed for reliability and performance. For warranty information, please refer to the warranty card included in your product packaging or visit the official ZSCMALLS website. If you encounter any issues or have questions not covered in this manual, please contact ZSCMALLS customer support through the contact information provided on the product packaging or their official website. Please retain your proof of purchase for warranty claims.