

Sweetcrispy SWDDCFullHJ2

Sweetcrispy Full Adjustable Bed Frame Instruction Manual

Brand: Sweetcrispy | **Model:** SWDDCFullHJ2

1. INTRODUCTION

This manual provides detailed instructions for the assembly, operation, maintenance, and troubleshooting of your Sweetcrispy Full Adjustable Bed Frame. Please read all instructions carefully before use to ensure safe and proper functionality.

The Sweetcrispy Full Adjustable Bed Frame is an ergonomic electric bed base designed to enhance your sleep experience with features like head and foot incline, zero gravity mode, and integrated USB ports. It is compatible with various mattress types including latex, hybrid foam, gel foam, and memory foam mattresses.

Note: The mattress is not included with the bed frame.

2. SAFETY INFORMATION

- Always follow assembly instructions carefully to avoid injury.
- Do not exceed the weight capacity of 750 lbs.
- Keep electrical components dry and away from heat sources.
- Never operate the bed with wet hands.
- Lifting the adjustable bed frame must be performed by two (2) people.
- The bed should always be in a flat position before operation or moving.
- Excessive pressure may damage the legs.
- Remove all protective plastic covering before use.
- Check to make sure that all power cords are clear and do not interfere with any Adjustable Bed Mechanisms.

3. PACKAGE CONTENTS

Before assembly, verify that all parts are included. All electronics and components that need to be installed are located in boxes under the base or attached to the frame.



Figure 1: Included Parts - Input Power Cord (A), Transformer Power Supply (B), 6x 6+6 inch legs (C), Wireless Remote Control (D), Mattress Retainer Bar (E).

4. ASSEMBLY INSTRUCTIONS

No tools are required for assembly. It is recommended to have two people for easier setup.

1. **Unpack and Position the Base:** With the help of an able-bodied assistant, place the carton on the floor. Carefully remove the bed frame from its packaging.
2. **Connect Power Supply:** Extend the input power cord (A) and plug it into the transformer power supply (B). Connect the transformer power supply (B) to the control box. The control box is the black box attached to the bottom of the bed.



Figure 2: Connecting the power supply to the control box.

3. **Unfold the Bed Base:** Flip the product over so the back is facing up. The side rails that are folded are at the foot section. Unfold the folded rails on both sides and press them firmly against the Velcro. Align the bottom foot rail upright and press it firmly against the Velcro.
4. **Install the Legs:** Install the six legs (C) firmly into the base of the frame. Screw the legs into the threaded holes on each corner of the adjustable base frame.



Figure 3: Attaching the bed legs to the frame.

5. **Synchronize Remote Control:** Synchronize the remote control (D) with the control box. Find the black box mounted under the bed. Locate the red circle indicating the button on the control box. Hold the button for 3 seconds after plugging in the adjustable bed; the light will flash quickly. Then press any key on the remote control (D). When the light stops flashing, the match is successful.



Figure 4: Synchronizing the remote control.

6. **Flip the Bed Frame:** For safety reasons, lifting the adjustable bed frame must be performed by two (2) people. The bed should always be in a flat position before operation. Excessive pressure may damage the legs.
7. **Insert Mattress Retainer Bar:** Get the Mattress Retainer Bar (E) from packaging. Carefully insert the mattress retainer bar (E) into the 2 holes on the foot end of the bed base.



Figure 5: Installing the mattress retainer bar.

8. **Enjoy Your Bed:** Plug in the adjustable base. You are ready to enjoy!

Assembly Video Guide

Video 1: Easy and Quick Installation of Electric Bed. This video demonstrates the simple assembly process for the electric bed frame.

5. OPERATING INSTRUCTIONS

Operate the motorized bed with the wireless remote control to easily adjust the head and foot sections.

Remote Control Functions

Charge Your Devices Anytime, Anywhere

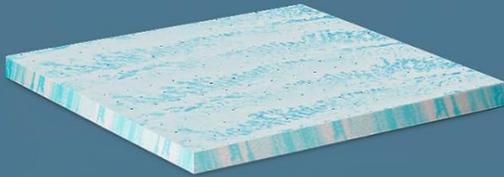


Figure 6: Wireless Remote Control with labeled functions.


- **Head Up/Down:** Adjusts the head section from 0 to 60°.
- **Foot Up/Down:** Adjusts the foot section from 0 to 40°.
- **Flat:** Returns the bed to a completely flat position with one touch.

Comfort Positions

Suitable for Most Mattresses



Memory foam

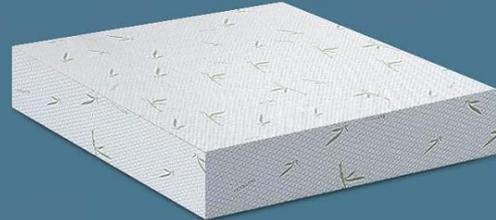

Hybrid



Innerspring



Latex

Tips: Recommended for mattresses under 14

Figure 7: Head and Foot Incline ranges.

- **Zero Gravity Sleep Experience:** Adjust the tilt angle to reduce stress and tension, relax muscles, and improve sleep quality.
- **Anti-Snore Position:** Elevating the head can help alleviate snoring.
- **Reading/Lounge Setting:** Adjust the head and foot sections for comfortable sitting or lounging.

Integrated USB Ports

Provides a Comfortable Sleeping Experience

Effectively Relieves Back and Neck Fatigue



Figure 8: USB charging ports on the bed frame.

The bed frame includes 2 USB ports (1x USB A, 1x USB B) located on the side, allowing you to charge your devices conveniently while relaxing in bed.

6. MAINTENANCE

- **Cleaning:** Wipe the frame with a damp cloth and mild detergent. Avoid harsh chemicals that may damage the finish or fabric.
- **Electrical Components:** Regularly check all electrical connections and cords for any signs of wear or damage. Ensure they are securely plugged in.
- **Moving the Bed:** When moving the bed, ensure it is in a flat position and unplugged. Lift with at least two people to prevent damage to the frame or injury.
- **Weight Distribution:** Distribute weight evenly on the bed frame to prevent undue stress on the motors and frame components.

7. TROUBLESHOOTING

- **Bed Not Responding to Remote:**
 - Check if the remote control batteries are correctly inserted and have power. Replace if necessary.
 - Ensure the bed is plugged into a working power outlet.
 - Re-synchronize the remote control with the control box as described in the assembly section.
- **Motor Noise:** A slight humming sound from the motors during adjustment is normal. If the noise is excessive or unusual, ensure all connections are secure and there are no obstructions.
- **Uneven Movement:** Check that the bed frame is on a level surface and that all legs are securely tightened.
- **Mattress Slipping:** Ensure the mattress retainer bar is correctly installed at the foot of the bed.

8. SPECIFICATIONS

Feature	Detail
Model Number	SWDDCFullHJ2
Size	Full
Product Dimensions	79 x 54 x 13.7 inches
Item Weight	119.3 pounds
Material	Metal, Polyester
Color	Dark Black
Head Incline Range	0 to 60°
Foot Incline Range	0 to 40°
Weight Capacity	750 lbs
Special Features	Adjustable, Ergonomic, Wireless Remote Control, 2 USB Ports, Zero Gravity Mode

FULL

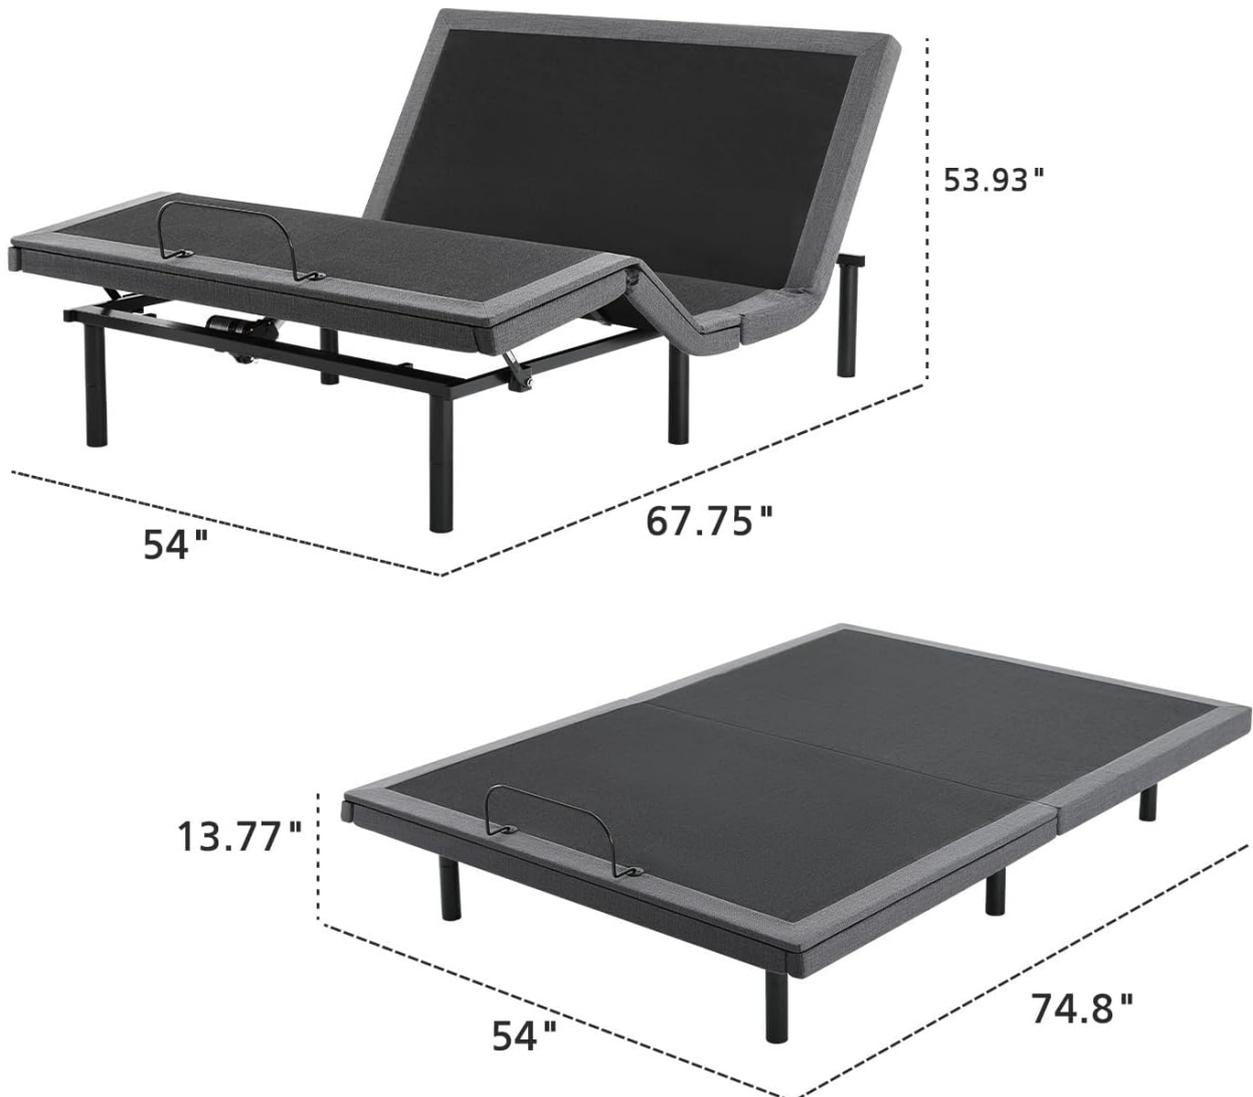


Figure 9: Sweetcrispy Full Adjustable Bed Frame.

Features

- 1 Head Up
- 2 Head Down
- 3 Foot Up
- 4 Foot Down
- 5 Flat



Figure 10: Product dimensions for the Full size bed frame.

9. WARRANTY AND SUPPORT

For warranty information or customer support, please refer to the documentation included with your product or contact Sweetcrispy customer service directly. Protection plans are also available for purchase separately.