

[Manuals.plus](#) /

› [Oaks Aura](#) /

› Oaks Aura 42-Inch Retractable Ceiling Fan with Lights and Remote (Model MD-FS5850) Instruction Manual

## Oaks Aura MD-FS5850

# Oaks Aura 42-Inch Retractable Ceiling Fan with Lights and Remote

## INSTRUCTION MANUAL (MODEL MD-FS5850)

### INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Oaks Aura 42-inch Retractable Ceiling Fan with Lights and Remote. Please read this manual thoroughly before installation and use, and retain it for future reference.

### IMPORTANT SAFETY INFORMATION

**WARNING:** To reduce the risk of fire, electric shock, or personal injury, always follow these basic precautions:

- Read all instructions carefully before installing or using the fan.
- Ensure the electrical supply is disconnected at the main fuse box or circuit breaker before installation or servicing.
- All electrical wiring must be performed by a qualified electrician and comply with local codes and regulations.
- The fan must be mounted to a structural support capable of holding at least 35 lbs (15.9 kg).
- Do not operate the fan with damaged wiring or if the fan is visibly damaged.
- Avoid placing objects in the path of the fan blades.
- Do not attempt to repair or modify the fan yourself. Contact qualified service personnel.

### PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Ceiling Fan Motor Assembly
- Retractable Fan Blades (3)
- LED Light Kit
- Remote Control
- Mounting Bracket
- Downrod (3.9" and 7.8" options)
- Hardware Pack (screws, wire nuts, washers)

- Instruction Manual

*Note: Some components may be pre-assembled.*

## INSTALLATION INSTRUCTIONS

**Before You Begin:** Ensure power is OFF at the circuit breaker. Consult a qualified electrician if you are unsure about wiring procedures.

1. **Mounting Bracket Installation:** Secure the mounting bracket to a ceiling joist or an outlet box approved for ceiling fan support. Use appropriate hardware.
2. **Downrod Assembly:** Insert the downrod through the canopy and coupling. Secure with the provided pin and cotter pin.
3. **Wiring Connections:** Connect the fan's electrical wires to the household supply wires according to local electrical codes. Typically, this involves connecting live, neutral, and ground wires. Use wire nuts to secure connections.
4. **Fan Assembly to Mounting Bracket:** Carefully lift the fan motor assembly and hang it on the mounting bracket hook (if available) or directly attach it to the bracket, ensuring all wires are tucked safely into the junction box.
5. **Blade Attachment:** The retractable blades are typically pre-attached or easily click into place. Ensure they are securely fastened.
6. **Light Kit Installation:** Connect the light kit wires to the fan motor assembly wires. Secure the light kit to the fan housing.
7. **Canopy Installation:** Slide the canopy up to the ceiling and secure it to the mounting bracket with the provided screws.
8. **Power On:** Restore power at the circuit breaker and test the fan and light functions.



#### Power

110V DC

#### Noise Level

≤30 dB(A)

#### Control

App & Remote  
Control

#### Materials

Plastics & Iron

#### Use Area

12ft×12ft

#### Fan Speed

6 Speed



Figure 1: Product Dimensions. The fan has a 19.6-inch light diameter and extends to a 42-inch blade span. Two downrod lengths, 3.9 inches and 7.8 inches, are available for installation.



Silent Motor



Stainless Steel Body



Retractable Fan Blades



Acrylic Lampshade

Gear 1-2 Gentle blow



Figure 2: Key Components. This image highlights the silent motor, durable stainless steel body, transparent retractable fan blades, and the acrylic lampshade.

## OPERATING INSTRUCTIONS

Your Oaks Aura ceiling fan can be controlled via the included remote control or a smartphone application.

### Remote Control Operation

The remote control allows for convenient adjustment of fan speed, light settings, and timing functions.

- **Fan ON/OFF:** Press the fan button to turn the fan on or off.
- **Fan Speed Adjustment:** Use the speed buttons (1-6) to select desired airflow.
- **Light ON/OFF:** Press the light button to turn the light on or off.
- **Light Color Temperature Adjustment:** Cycle through 3000K (Warm Light), 4500K (Natural Light), and 6000K (White Light) by pressing the color temperature button.
- **Light Dimming:** Use the dimming buttons to adjust light brightness.
- **Timer Function:** Set the fan and/or light to turn off after 1, 2, 4, or 6 hours.
- **Forward/Reverse Function:** Press the reverse button to change the fan blade rotation direction for summer (forward) or winter (reverse) modes.

# COLOR TEMPERATURE



Remote control to adjust the ideal light color

White light

Natural light

Warm light

Figure 3: Color Temperature Options. The fan light offers three distinct color temperatures: 6000K (White Light), 4500K (Natural Light), and 3000K (Warm Light), adjustable via remote control.



## Winter Reverse Air Flow



## Summer Forward Air Flow

Figure 4: Reversible Airflow Function. The fan supports both summer forward airflow (downward air movement for cooling) and winter reverse airflow (upward air movement for heat distribution).



Figure 5: 6-Speed Wind Settings. The fan offers six speed settings, categorized as Soft Wind (1-2), Natural Wind (3-4), and Cool Wind (5-6) for various comfort levels.

## APP Control Operation

Download the designated smartphone application to control your fan. The APP provides all functions available on the remote control, plus additional smart features.

1. **Download APP:** Scan the QR code in the quick start guide or search for the official APP in your device's app store.
2. **Pairing:** Follow the in-app instructions to pair your smartphone with the ceiling fan. This typically involves ensuring the fan is powered on and your phone's Bluetooth or Wi-Fi is enabled.
3. **Control Functions:** Use the APP interface to adjust fan speed, light brightness, color temperature, set timers, and switch between forward and reverse modes.

## MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your ceiling fan.

- **Cleaning:** Periodically clean the fan blades and light fixture with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these can damage the finish. Ensure power is off before cleaning.
- **Tighten Fasteners:** Check all screws and fasteners on the fan and mounting bracket annually. Tighten any loose connections to prevent wobbling or noise.
- **Blade Balance:** If the fan wobbles, ensure all blades are securely attached and balanced. A balancing kit (not included) can be used if necessary.
- **Light Source:** The LED light source is integrated and generally not user-replaceable. If the light fails, contact customer support.

## TROUBLESHOOTING

Refer to the following table for common issues and their solutions:

| Problem                    | Possible Cause                                             | Solution                                                                                                                            |
|----------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Fan does not start         | No power supply; Loose wiring; Remote control battery low. | Check circuit breaker; Verify all wire connections are secure; Replace remote control batteries.                                    |
| Light does not work        | No power to light kit; Loose wiring; LED failure.          | Check light switch and circuit breaker; Verify light kit wiring; Contact customer support if LED is faulty.                         |
| Fan wobbles                | Loose mounting bracket; Unbalanced blades; Loose downrod.  | Ensure mounting bracket is securely fastened; Check blade attachment and balance; Tighten downrod screws.                           |
| Remote control not working | Low battery; Not paired; Obstruction.                      | Replace batteries; Re-pair remote with fan (refer to pairing instructions); Ensure no obstructions between remote and fan receiver. |
| Excessive noise            | Loose screws; Motor issue; Blades hitting an obstruction.  | Check and tighten all screws; Ensure blades are clear of obstructions; If motor noise persists, contact customer support.           |



Figure 6: Quiet Operation. The fan features a quiet DC motor, operating at less than 30dB, ensuring minimal noise disturbance.

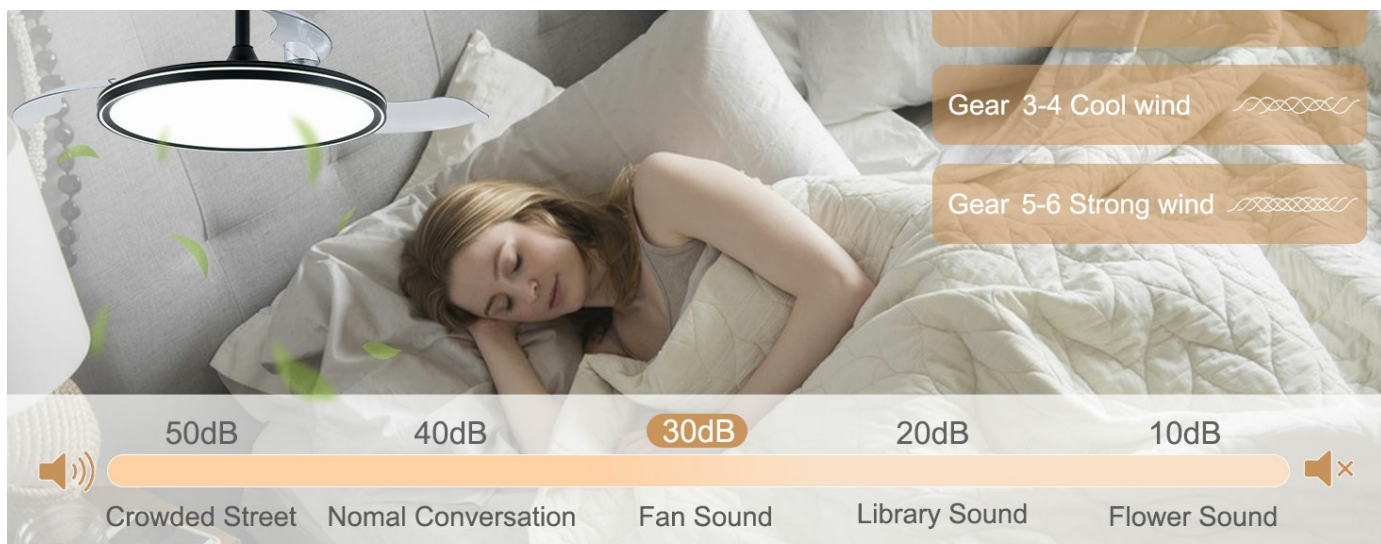


Figure 7: Noise Level Comparison. The fan operates at approximately 30dB, comparable to a quiet library, significantly lower than normal

## SPECIFICATIONS

| Feature              | Detail                                                                                    |
|----------------------|-------------------------------------------------------------------------------------------|
| Brand                | Oaks Aura                                                                                 |
| Model Name           | MD-FS5850                                                                                 |
| Product Dimensions   | 42"D x 42"W x 14.6"H (Extended)                                                           |
| Electric Fan Design  | Retractable Ceiling Fan                                                                   |
| Power Source         | AC                                                                                        |
| Style                | Modern                                                                                    |
| Special Features     | Adjustable Height, LED Light, Quiet Operation, Remote Controlled, Timer, Reversible Motor |
| Mounting Type        | Ceiling Mount                                                                             |
| Controller Type      | App Control, Remote Control                                                               |
| Number of Speeds     | 6                                                                                         |
| Noise Level          | 35 dB                                                                                     |
| Wattage              | 50 watts                                                                                  |
| Indoor Outdoor Usage | Indoor                                                                                    |
| Motor Type           | DC                                                                                        |
| Material             | Copper, Metal, Plastic                                                                    |
| Item Weight          | 13.7 pounds                                                                               |
| Included Components  | Cord, Light Kit, Remote                                                                   |

## WARRANTY AND SUPPORT

Oaks Aura products are manufactured to high-quality standards. For specific warranty details, please refer to the warranty card included with your product or contact Oaks Aura customer support.

If you encounter any issues or have questions regarding your Oaks Aura 42-inch Retractable Ceiling Fan, please contact our customer support team for assistance. You can typically find contact information on the manufacturer's website or through your purchase platform.

**Online Support:** Visit the [Oaks Aura Store on Amazon](#) for product information and support resources.

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

---

**Open the live page**

**<https://manuals.plus/asin/B0FR94NTL5>**

More documents and user manuals: **<https://manuals.plus/>**