Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Spigen ACH10398

Spigen Essential Qi2.2 25W 3-in-1 MagSafe Wireless Charger User Manual

Model: ACH10398

1. Introduction

The Spigen Essential Qi2.2 25W 3-in-1 MagSafe Wireless Charger is designed to provide efficient and simultaneous charging for your compatible smartphone, TWS earbuds, and smartwatch. This device supports the Qi2.2 standard for fast wireless charging and features a foldable, portable design with strong magnetic attachment for secure placement.

2. Package Contents

Please verify that all items are present in your package:

- Spigen Qi2.2 Wireless Charger × 1
- USB-C to USB-C Cable (2.0 m) × 1
- User Manual × 1
- Packaging Box × 1

3. Product Overview

The charger features dedicated areas for each device type:

- **Phone Charging Pad:** Main magnetic pad for smartphones, supporting up to 25W.
- **Earbuds Charging Area:** Base area for TWS earbuds, supporting up to 5W.
- **Watch Charging Module:** Adjustable module for smartwatches, supporting up to 2.5W.



Image: The Spigen 3-in-1 wireless charger with designated charging spots for a smartphone, earbuds, and a smartwatch.

4. Setup and Initial Use

1. **Unfold the Charger:** Gently unfold the charging stand from its compact, folded position.

2. **Connect Power:** Insert the provided USB-C to USB-C cable into the charging port on the back of the charger. Connect the other end of the cable to a compatible power adapter (not included). For optimal performance, a 45W or higher power adapter is recommended.
3. **Placement:** Place the charger on a stable, flat surface.

▶ **Watch video online**

Video: A demonstration of the Spigen 3-in-1 wireless charger's setup and use, showing how to unfold it, connect the power cable, and charge multiple devices simultaneously.

5. Operation

5.1 Charging Your Smartphone

- Ensure your smartphone is MagSafe compatible or has a MagSafe-compatible case.
- Place your smartphone onto the magnetic charging pad. The strong N52 magnets will securely align your device for optimal charging.
- The charger supports up to 25W fast wireless charging for compatible devices (e.g., iPhone 17/16 series, Google Pixel 10 Pro XL) and 15W for others (e.g., iPhone 12-15 series, Pixel 10 series).

5.2 Charging Your Earbuds

- Place your TWS earbuds case (e.g., AirPods, Galaxy Buds, Pixel Buds) onto the designated charging area at the base of the stand.
- The earbuds charging area provides up to 5W of power.

5.3 Charging Your Smartwatch

- Attach your Apple Watch or Galaxy Watch to the adjustable watch charging module.
- The watch charging module provides up to 2.5W of power.
- The module can be slid out for 3-in-1 charging or retracted for a more compact 2-in-1 setup.

5.4 Adjustable Angle and Orientation

- The phone charging pad can be adjusted between 45° and 60° for optimal viewing angles.
- The circular raised design allows for seamless switching between portrait and landscape modes without camera interference.



Image: The charger demonstrating its versatility, allowing a smartphone to be charged in both portrait and landscape orientations, and showing the watch charging module.

6. Key Features

- **Qi2.2 25W Fast Charging:** Supports the latest Qi2.2 standard for rapid wireless charging, delivering up to 25W

for compatible devices.

- **3-in-1 Charging Solution:** Simultaneously charges your smartphone, TWS earbuds, and smartwatch from a single compact device.
- **Powerful Magnetic Attachment:** Integrated N52 magnets ensure a secure MagSafe alignment and stable charging experience.
- **Adjustable & Portable Design:** Features a 45°-60° adjustable tilt and a sliding watch module for flexible use. The foldable design makes it easy to transport.
- **Smart AirBoost Optimization:** Automatically adjusts power output to provide the ideal charging wattage for each connected device.
- **Intelligent Safety System:** Equipped with 15 safety features to protect against overcharge, short-circuit, overcurrent, overheating, and foreign object detection (FOD).



Image: A visual representation of the strong magnetic attachment feature, showing a phone securely connected to the charging pad.



Image: An infographic detailing the comprehensive 15-point intelligent safety system, including protection against overcharge, short-circuit, overcurrent, overheating, and foreign object detection.

7. Compatibility

The Spigen Essential Qi2.2 25W 3-in-1 Wireless Charger is compatible with a wide range of devices:

- **Smartphones (25W Qi2.2):** iPhone 17/16 Series, Google Pixel 10 Pro XL.
- **Smartphones (15W MagSafe/Qi):** iPhone 12/13/14/15 Pro/Max/Air Series, Google Pixel 10/10 Pro/10 Pro Fold. (Requires MagSafe case for non-MagSafe phones).
- **TWS Earbuds:** AirPods, Galaxy Buds, Pixel Buds.
- **Smartwatches:** Apple Watch, Galaxy Watch.

Note: MagSafe cases are not included. Ensure your device supports Qi2.2 and MagSafe charging for optimal performance. Cases thicker than 3mm may affect wireless charging, and some Spigen cases (e.g., Tough Armor, Slim Armor) may not be compatible.

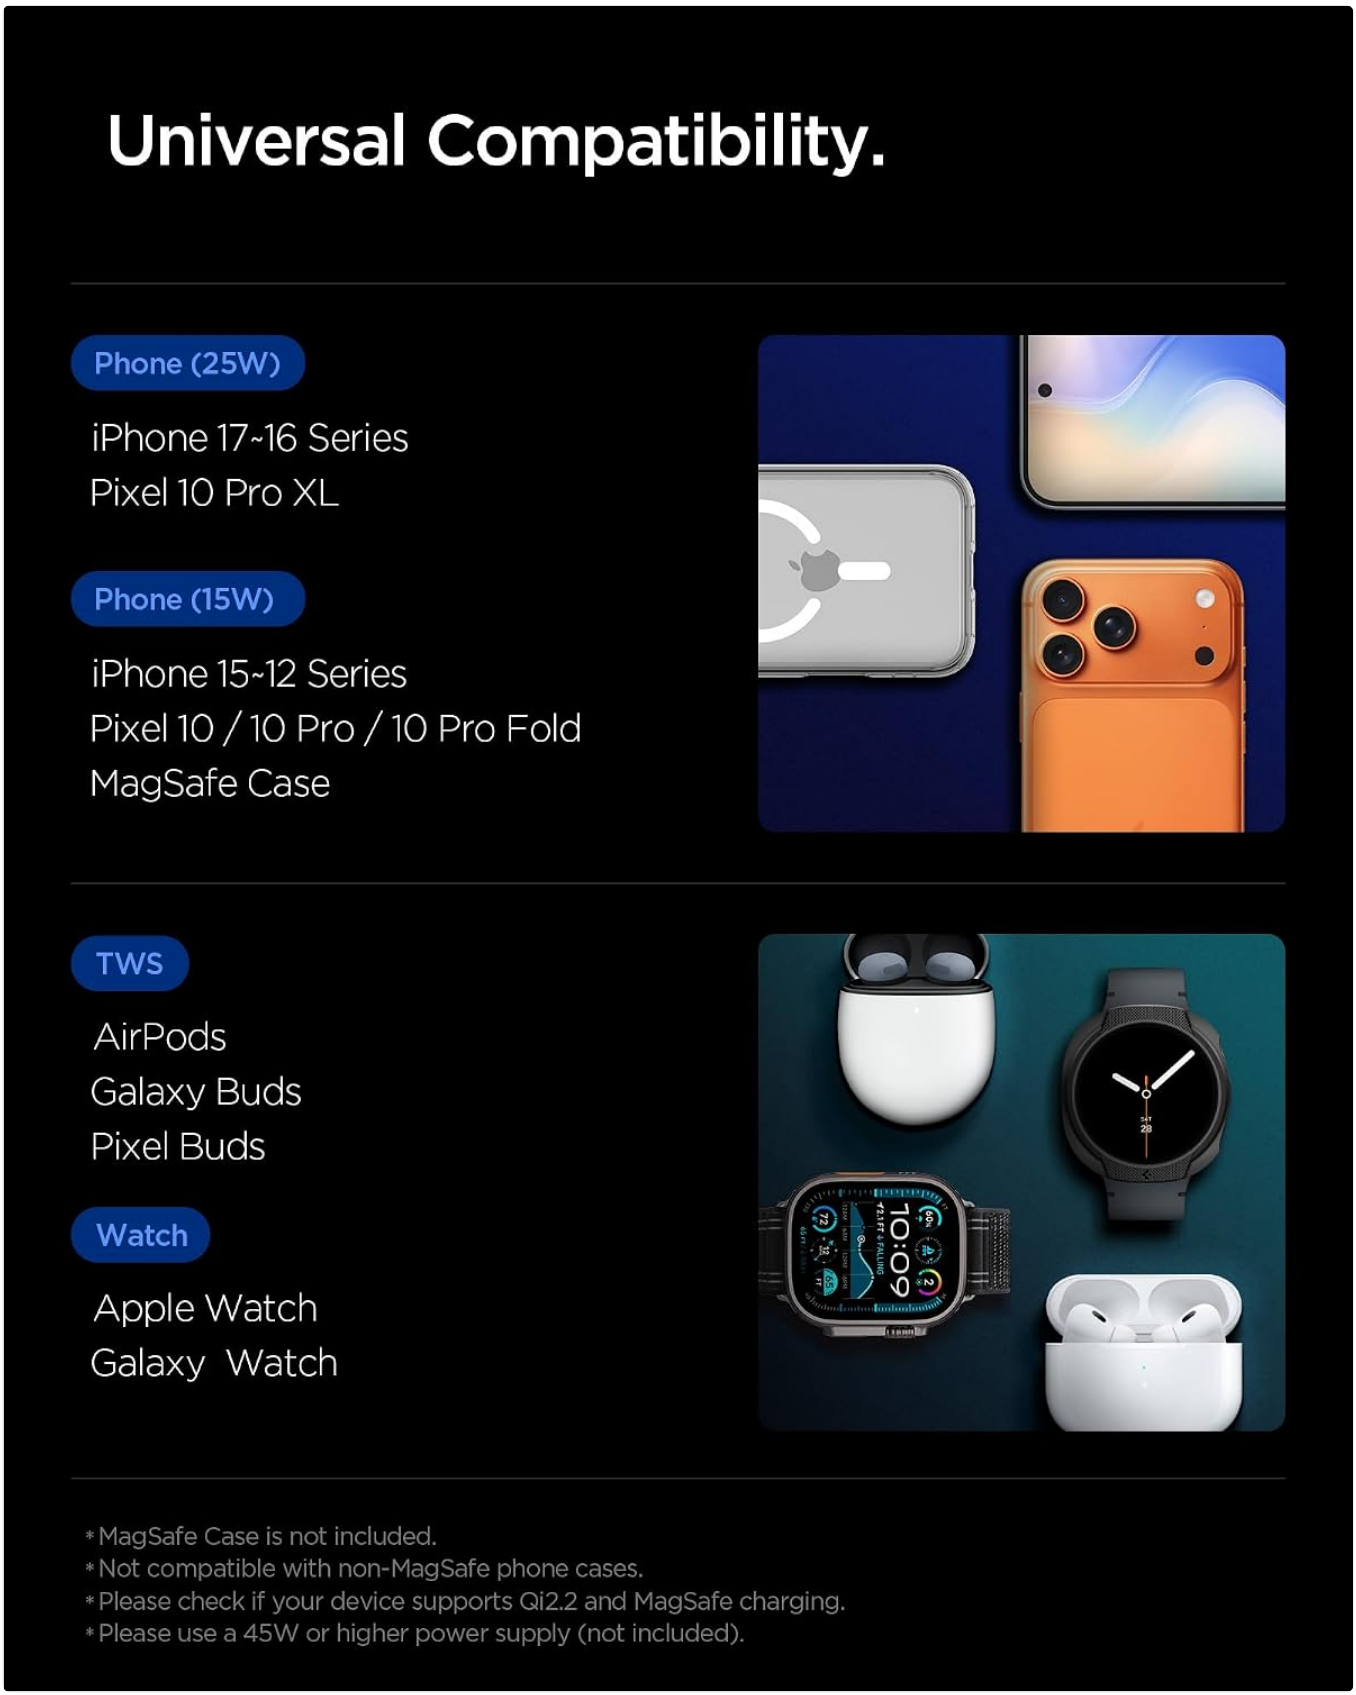


Image: A visual guide to the charger's universal compatibility with different smartphone, earbud, and smartwatch models.

8. Safety Information

To ensure safe and optimal use of your Spigen Essential Qi2.2 25W 3-in-1 Wireless Charger, please observe the following safety guidelines:

- Use only with a compatible power adapter (45W or higher recommended).
- Do not expose the charger to water, moisture, or extreme temperatures.
- Avoid placing metal objects or foreign materials on the charging surfaces, as this may interfere with charging or cause overheating.
- Do not disassemble, modify, or attempt to repair the device yourself. Contact customer support if service is required.
- Keep out of reach of children and pets.
- Unplug the charger during lightning storms or when unused for extended periods.

9. Troubleshooting

- **Device not charging:**
  - Ensure the charger is properly connected to a power source (45W+ adapter recommended).
  - Verify that your device is correctly aligned on the charging pad.
  - Remove any thick cases (over 3mm) or cases containing metal.
  - Check for any foreign objects between the device and the charging pad.
  - Restart your device and try again.
- **Slow charging:**
  - Ensure you are using a power adapter of 45W or higher.
  - Confirm your device supports the fast wireless charging standard (Qi2.2 or MagSafe).
  - Check for proper alignment and remove any obstructions.
- **Overheating:**
  - Slight warmth during charging is normal. If the device or charger becomes excessively hot, discontinue use and unplug.
  - Ensure adequate ventilation around the charger.
  - Remove any cases that might trap heat.
- **Watch charging is unstable:**
  - Reduce the angle of the watch module or remove the watch strap and case before use.

10. Specifications

Feature	Specification
Brand	Spigen
Model Number	ACH10398

Color	Black
Connectivity	Wireless (USB-C input)
Total USB Ports	1 (for power input)
Input Voltage	15 Volts
Amperage	3 A
Power Output	25 Watts (Max)
Phone Charging	Up to 25W (Qi2.2), 15W (MagSafe)
Earbuds Charging	Up to 5W
Watch Charging	Up to 2.5W
Compatible Devices	Smartphones (iPhone 12-17 series, Pixel 10 Pro XL), TWS Earbuds (AirPods, Galaxy Buds, Pixel Buds), Smartwatches (Apple Watch, Galaxy Watch)

11. Warranty and Support

Spigen products are manufactured to high-quality standards. For warranty information, technical support, or customer service inquiries, please refer to the official Spigen website or contact your local retailer. Keep your purchase receipt for warranty claims.

© 2026 Spigen. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0FRD6N8JV

More documents and user manuals: **https://manuals.plus/**