OWNAIR AP:070

OWNAIR Air Purifier AP:070 User Manual

Model: AP:070

1. Introduction

Thank you for choosing the OWNAIR Air Purifier AP:070. This device is designed to improve your indoor air quality by effectively removing dust, smoke, allergens, and odors. Featuring a HEPA 13 filtration system, ultra-quiet operation, and intuitive touch controls, it provides a cleaner and healthier environment for your home or office. Please read this manual thoroughly before use to ensure proper operation and maintenance.

2. Safety Instructions

To reduce the risk of fire, electric shock, or injury, please observe the following safety precautions:

- Always unplug the air purifier before moving, cleaning, or replacing the filter.
- Do not operate the unit with a damaged cord or plug. If the cord or plug is damaged, contact customer support.
- Keep the air purifier away from water or wet areas. Do not immerse in water or other liquids.
- Do not block air inlets or outlets. Ensure at least 20 cm (8 inches) clearance from walls and furniture.
- Do not insert fingers or foreign objects into the air inlets or outlets.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Use only the power adapter provided with the unit.
- Do not use the air purifier in areas with flammable or combustible gases.

3. Package Contents

- OWNAIR Air Purifier AP:070
- HEPA 13 Filter (pre-installed)
- Power Adapter

- User Manual



Image 1: OWNAIR Air Purifier AP:070 main unit.



Image 2: Power adapter included with the air purifier.

4. Product Overview

Familiarize yourself with the components and control panel of your OWNAIR Air Purifier.

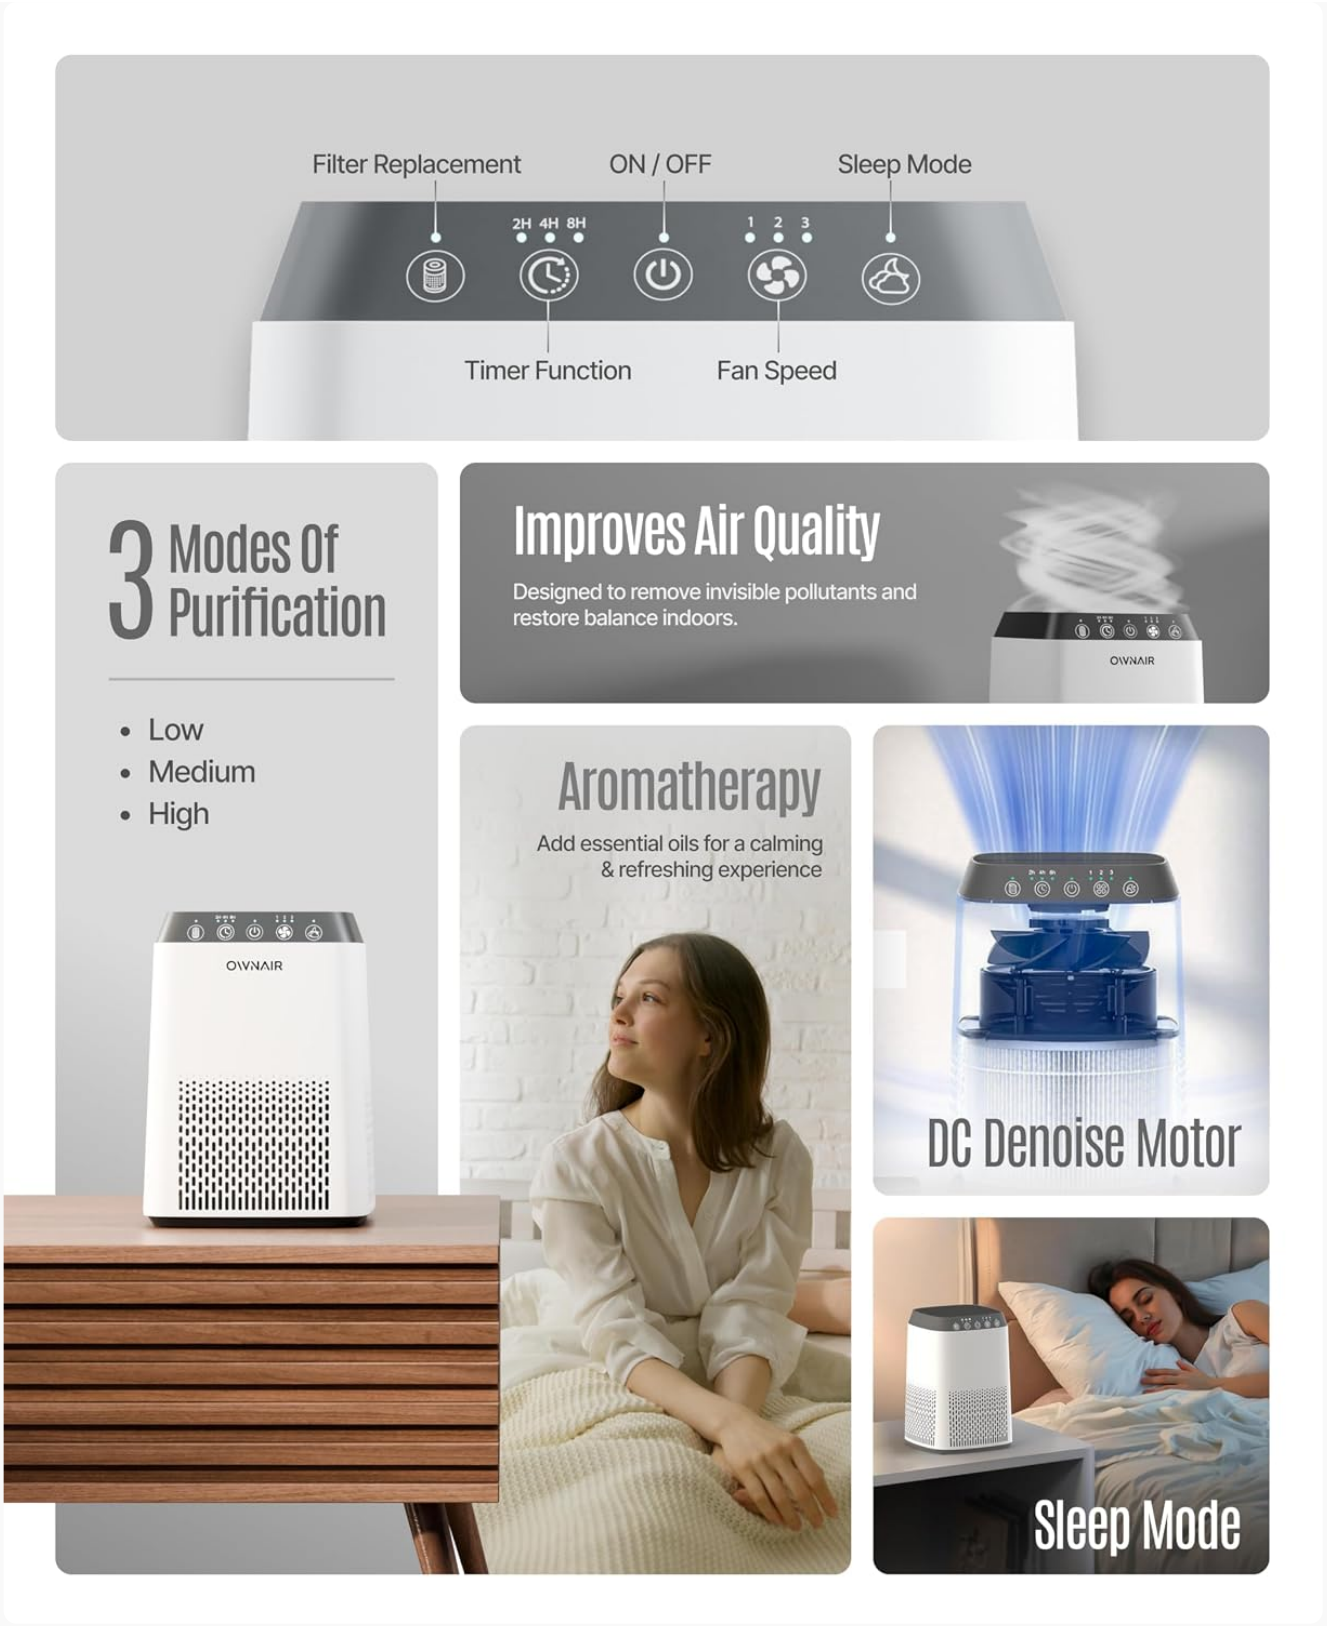


Image 3: Overview of the air purifier's control panel and key features including filter replacement indicator, timer, power, fan speed, and sleep mode.

Control Panel Functions:

- **Filter Replacement Indicator:** Lights up when the filter needs to be replaced.
- **Timer Function:** Sets the operating time (2H, 4H, 8H).
- **Power On/Off:** Turns the unit on or off.
- **Fan Speed:** Adjusts airflow (1-Low, 2-Medium, 3-High).
- **Sleep Mode:** Activates ultra-quiet operation.

5. Setup

5.1 Unpacking and Filter Installation

1. Carefully remove the air purifier from its packaging.
2. Turn the unit upside down and twist the base cover counter-clockwise to unlock it.
3. Remove the plastic packaging from the HEPA 13 filter.
4. Insert the filter back into the unit, ensuring it is seated correctly.
5. Replace the base cover and twist clockwise to lock it securely.



Image 4: Exploded view illustrating the 3-stage filtration system, including pre-filter, HEPA H13 filter, and activated carbon filter.

5.2 Placement

Place the air purifier on a flat, stable surface. Ensure there is adequate space around the unit (at least 20 cm or 8 inches) for optimal air circulation. Avoid placing it near heat sources, direct sunlight, or in areas with high humidity.

5.3 Power Connection

Connect the power adapter to the air purifier's power port, then plug the adapter into a standard electrical outlet.

6. Operating Instructions

6.1 Power On/Off

- Press the **Power Button** () to turn the air purifier on. The unit will start in a default fan speed.
- Press the **Power Button** again to turn the unit off.

6.2 Fan Speed Adjustment

- Press the **Fan Speed Button** () repeatedly to cycle through fan speeds: Low (1), Medium (2), High (3).

6.3 Sleep Mode

- Press the **Sleep Mode Button** () to activate Sleep Mode. In this mode, the fan operates at its lowest speed (25dB) and indicator lights dim for undisturbed rest.
- Press any other button to exit Sleep Mode.



Image 5: The air purifier operating quietly in a bedroom, ideal for sleep with its 25dB noise level.

6.4 Timer Function

- Press the **Timer Button** (🕒) repeatedly to set the desired operating time: 2 hours, 4 hours, or 8 hours. The unit will automatically turn off after the set time.
- To cancel the timer, press the Timer Button until no timer indicator light is illuminated.

6.5 Aromatherapy Feature

- Locate the aromatherapy pad slot on the top of the unit.
- Add a few drops of your preferred essential oil onto the aromatherapy pad.

- Insert the pad back into the slot. The aroma will diffuse with the purified air.



Image 6: Illustration of adding essential oils to the dedicated aromatherapy pad for a soothing fragrance.

7. Maintenance

7.1 Filter Replacement

The filter replacement indicator ( ) will illuminate when it's time to replace the filter, typically every 3-6 months depending on usage and air quality.

1. Unplug the air purifier from the power outlet.
2. Turn the unit upside down and twist the base cover counter-clockwise to unlock.
3. Remove the old filter.
4. Insert a new OWNAIR HEPA 13 replacement filter (ensure plastic packaging is removed).
5. Replace the base cover and twist clockwise to lock.
6. Plug in the unit. To reset the filter indicator, press and hold the **Filter Replacement Button** for 3-5 seconds until the light turns off.



Image 7: Diagram illustrating the multi-layer HEPA filtration system, showing how it captures 99.97% of particles.

7.2 Cleaning the Unit

- Wipe the exterior of the air purifier with a soft, dry cloth.
- Do not use abrasive cleaners or solvents.
- The pre-filter layer of the HEPA filter can be gently vacuumed to extend its life, but the HEPA and activated carbon layers are not washable.

8. Troubleshooting

Problem	Possible Cause	Solution
Unit does not turn on	No power supply; Power adapter not connected properly; Unit is damaged.	Check power outlet; Ensure adapter is securely plugged in; Contact customer support.
Weak airflow	Filter is dirty or clogged; Air inlets/outlets are blocked.	Replace filter; Ensure clear space around the unit.
Unusual noise	Filter not installed correctly; Foreign object inside unit.	Reinstall filter; Unplug and check for obstructions (if safe to do so); Contact customer support.
Odor persists	Filter needs replacement; Source of odor still present.	Replace filter; Identify and remove odor source.
Filter indicator light remains on after replacement	Filter reset not performed.	Press and hold the Filter Replacement Button for 3-5 seconds to reset.

9. Specifications

Feature	Specification
Model Number	AP:070
Brand	OWNAIR
Color	White
Product Dimensions	25D x 10W x 18H Centimeters
Floor Area Coverage	Up to 150 Square Feet
Filter Class	HEPA H13
Particle Retention Size	2.5 Micron (removes 99.97%)
Noise Level	As low as 25 Decibels (Sleep Mode)
Controller Type	Touch Control
Wattage	7.2 Watts
Contaminant Filtration	Cigarette Smoke, Pet Dander, Pet Hair, Pollen, Dust, Odors
Special Feature	Portable, Aromatherapy Essential Oil Feature
Item Weight	400 g

10. Warranty Information

OWNAIR products are manufactured to the highest quality standards. For specific warranty terms and conditions, please refer to the warranty card included with your product or contact our customer support team. Keep your purchase receipt as proof of purchase for warranty claims.

11. Customer Support

For any questions, technical assistance, or warranty inquiries, please contact OWNAIR customer support:

Support Helpline: +91 9226267775

Email ID: support@ownairstore.com

WhatsApp: +91 9226267775

Online Support: Scan for support

Our customer support team is available 24/7 for your assistance.



Image 8: OWNAIR customer support details including phone, email, and WhatsApp QR code.

© 2025 OWNAIR. All rights reserved.