

[Manuals.plus](#) /

> [OOSSXX](#) /

> OOSSXX 4-Camera 2TB Wired Outdoor Home Security Camera System User Manual

## OOSSXX 4Cams-2TB

# OOSSXX 4-Camera 2TB Wired Outdoor Home Security Camera System User Manual

Model: 4Cams-2TB (ASIN: B0FS1NBNVW)

## 1. INTRODUCTION

---

This user manual provides detailed instructions for the OOSSXX 4-Camera 2TB Wired Outdoor Home Security Camera System. Please read this manual thoroughly before installation and operation to ensure proper use and optimal performance of your security system. This system is designed for reliable surveillance with advanced features for home and property protection.

## 2. WHAT'S IN THE BOX

---

Verify that all components are present in your package:

- 8-Channel 4K PoE NVR with 2TB Hard Drive x 1
- 4K/8.0 Megapixel PoE Dome Camera x 4
- 60 Feet Network Cable x 4
- 48V Power Supply for NVR x 1
- Remote Control x 1
- USB Mouse x 1
- HDMI Cable x 1
- 1m LAN Cable x 1
- Screw Kits x 4
- Security Stickers
- User Manuals

[Your browser does not support the video tag.](#)

**Video:** Unboxing the OOSSXX 4K PoE Dome 4-Pack Wired Camera System. This video demonstrates the contents of the product package, including the NVR, cameras, cables, and accessories.

## 3. PRODUCT FEATURES

- **4K Ultra HD Resolution:** Capture crystal clear videos day and night with 8.0MP cameras (3840 x 2160).
- **130° Ultra Wide-Angle Lens:** Equipped with an optical wide-angle lens to provide a broad viewing angle and reduce surveillance dead zones.
- **Enhanced Night Vision:** 3 infrared array LEDs provide high-quality night vision up to 100ft (65 feet effective range).
- **One-Way Audio:** Built-in microphone allows you to listen to what is happening through the app. Note: This is a one-way audio feature for listening only.
- **Plug and Play PoE System:** Easy installation with 60ft network cables. Cameras connect directly to NVR ports for immediate recording and live viewing.
- **IP67 Waterproof Rating:** Cameras are designed to withstand outdoor conditions, working stably in all seasons.
- **H.265+ Video Compression:** Advanced compression technology for efficient storage and faster video processing.
- **AI Human Detection:** Advanced technology to accurately detect human movement and reduce false alarms.
- **Multiple Recording Modes:** Supports manual, scheduled, and motion detection recording.




**Image:** Comparison of a 130° ultra wide-angle lens view versus a standard 80° angle, highlighting the broader coverage of the OOSSXX camera.

## 4K Ultra HD

4K Ultra HD (8MP, 3840 × 2160) PoE camera delivers almost four times the clarity of 1080p



**Image:** Visual comparison demonstrating the superior clarity of 4K Ultra HD (8MP) resolution compared to 1080P.

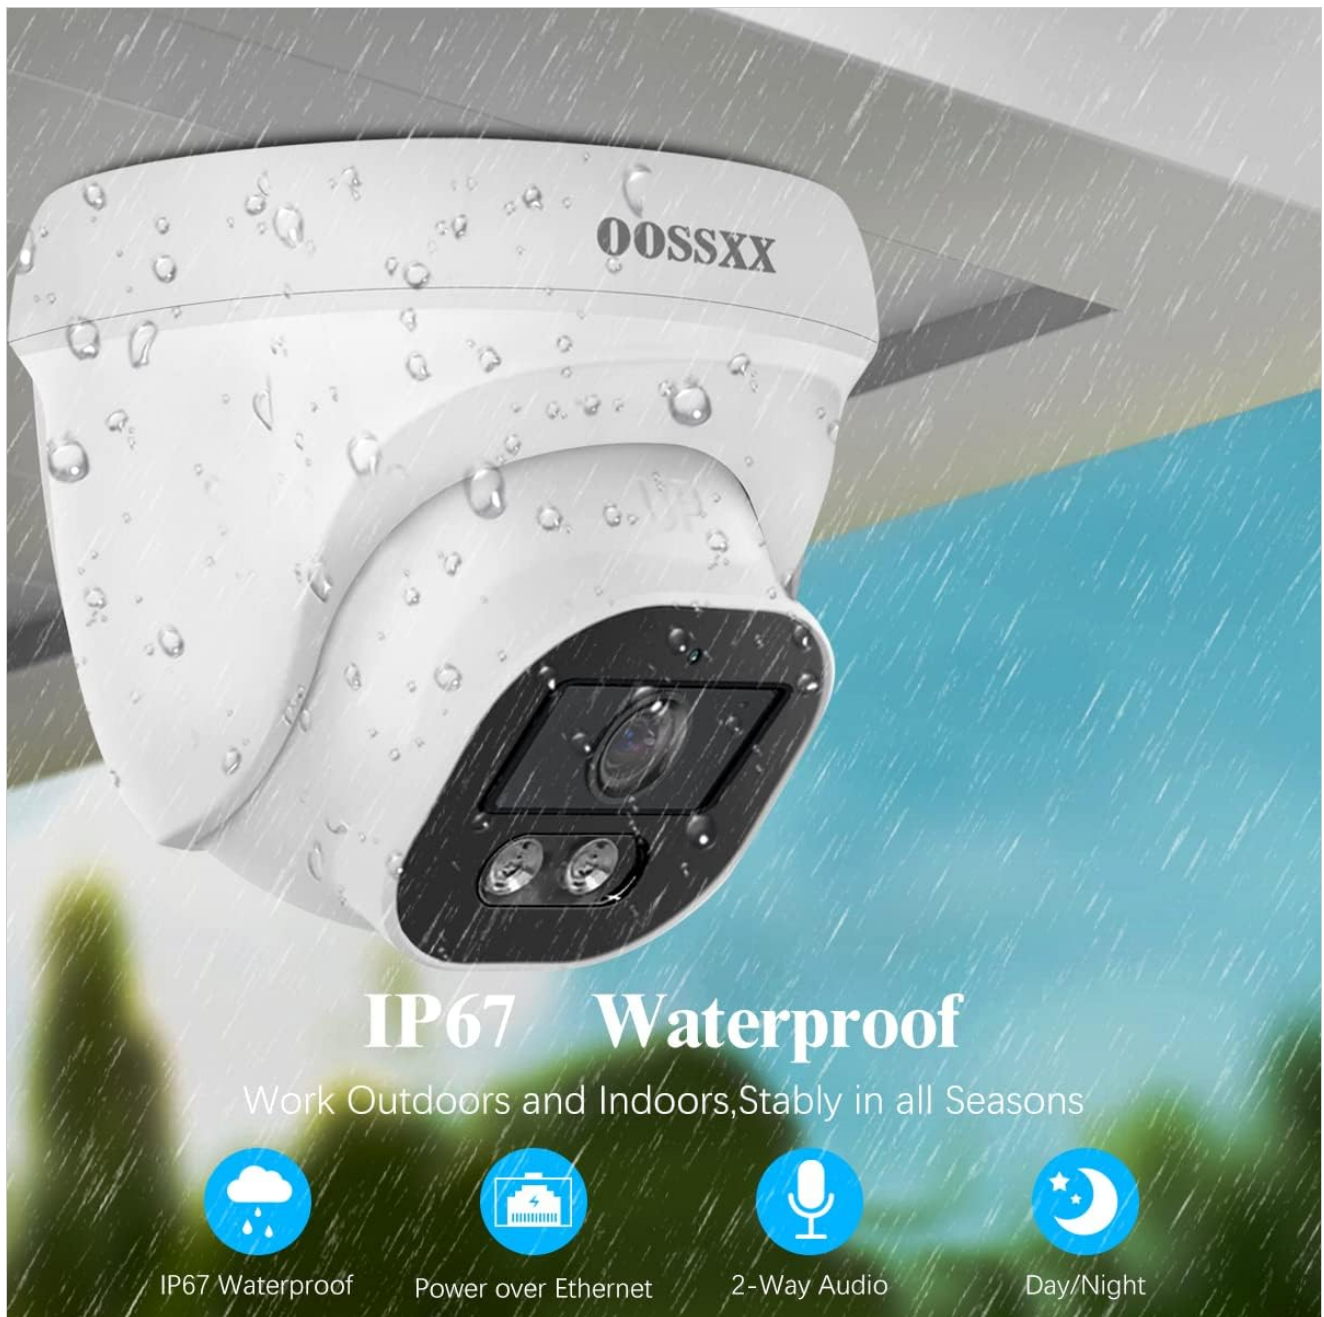

**Image:** An OOSSXX dome camera shown in rainy conditions, illustrating its IP67 waterproof rating for outdoor use.

## 4. SETUP INSTRUCTIONS

Follow these steps to set up your OOSSXX PoE Security Camera System:


1. **Connect Cameras to NVR:** Use the provided 60ft network cables to connect each PoE dome camera to the PoE LAN ports on the NVR.
2. **Power On NVR:** Connect the 48V power supply to the NVR's power port and plug it into an electrical outlet.
3. **Connect to Router (for online access):** Connect the NVR's WAN port to your internet router using the 1m LAN cable.
4. **Connect to Display:** Connect the NVR to a monitor or TV using an HDMI or VGA cable to view the live feed and configure settings.
5. **Install Cameras:** Unscrew the camera base, measure and drill screw hole locations, insert wall anchors, screw the camera base in place, and then mount the camera on the wall.

Your browser does not support the video tag.

**Video:** Installation guide for the 4K PoE Dome Camera System. This video illustrates the physical installation steps for the cameras.

Your browser does not support the video tag.

**Video:** Guide on connecting OOSSXX PoE cameras to the PoE NVR. This video details the wiring process for the security system.

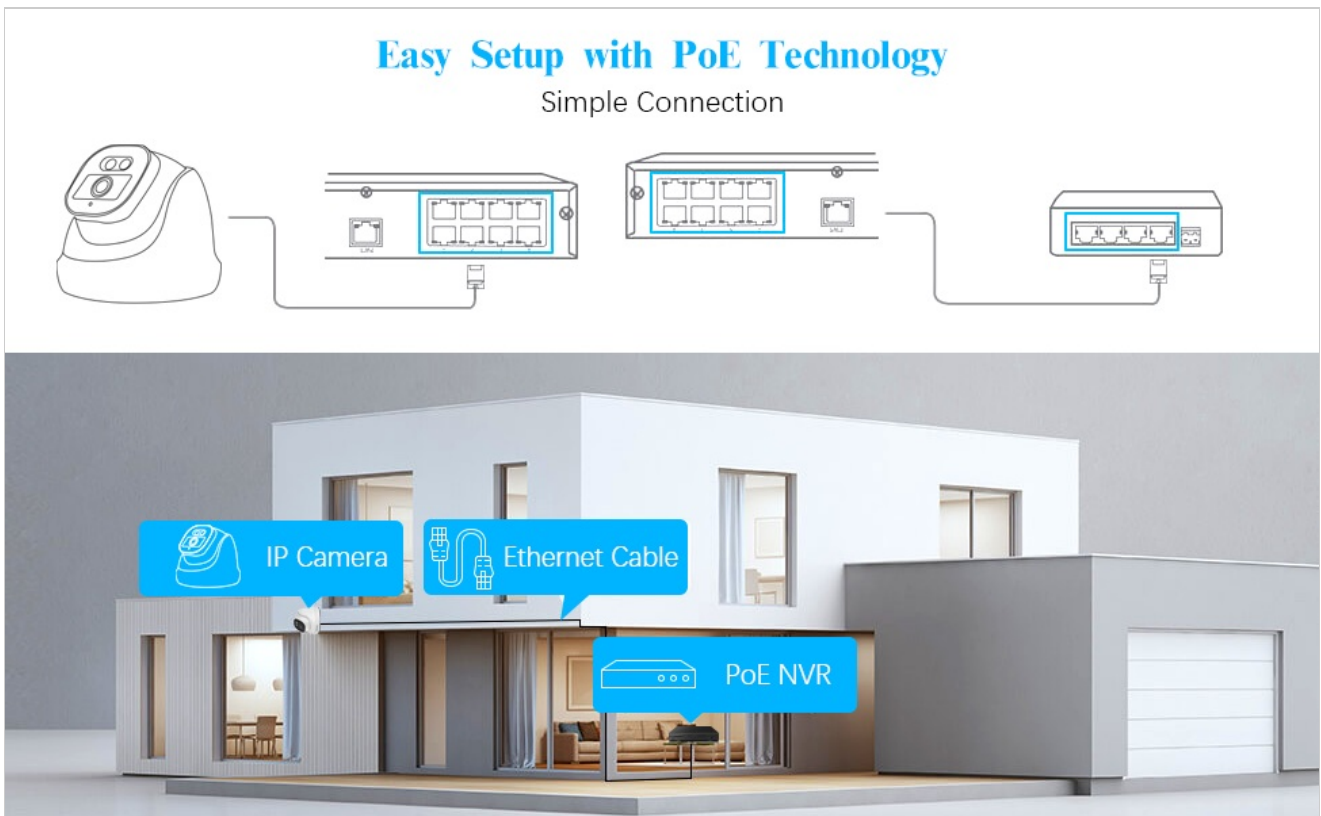

**Image:** A diagram illustrating the simple plug-and-play connection of the PoE camera to the NVR using an Ethernet cable.

## 5. OPERATING INSTRUCTIONS

Your OOSSXX security system can be operated locally via a monitor connected to the NVR, or remotely via the dedicated mobile application.

### 5.1 Remote Access via Mobile App

Download the free "Honestview" app from your smartphone's App Store (iOS & Android). With an internet connection, you can watch live videos, review recordings, and receive motion alerts remotely from anywhere.

Your browser does not support the video tag.


**Video:** Setup guide for OOSSXX PoE Surveillance using the mobile app. This video demonstrates how to connect and view your security system via the "Honestview" app.

Your browser does not support the video tag.

**Video:** Display of the 4K PoE Dome Wired Camera System (4-pack). This video shows the live view interface and capabilities of the system.


### 5.2 Motion Detection and Alerts

The system features advanced AI human detection technology. When motion is detected, you will receive instant notifications on your phone and email, allowing you to monitor your property effectively.

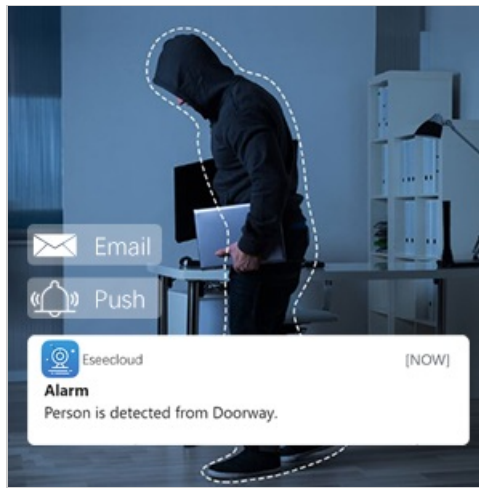

**Image:** Icon representing Advanced AI Human Detected Technology, which helps in reducing false alarms.

## Multiple Recording Modes

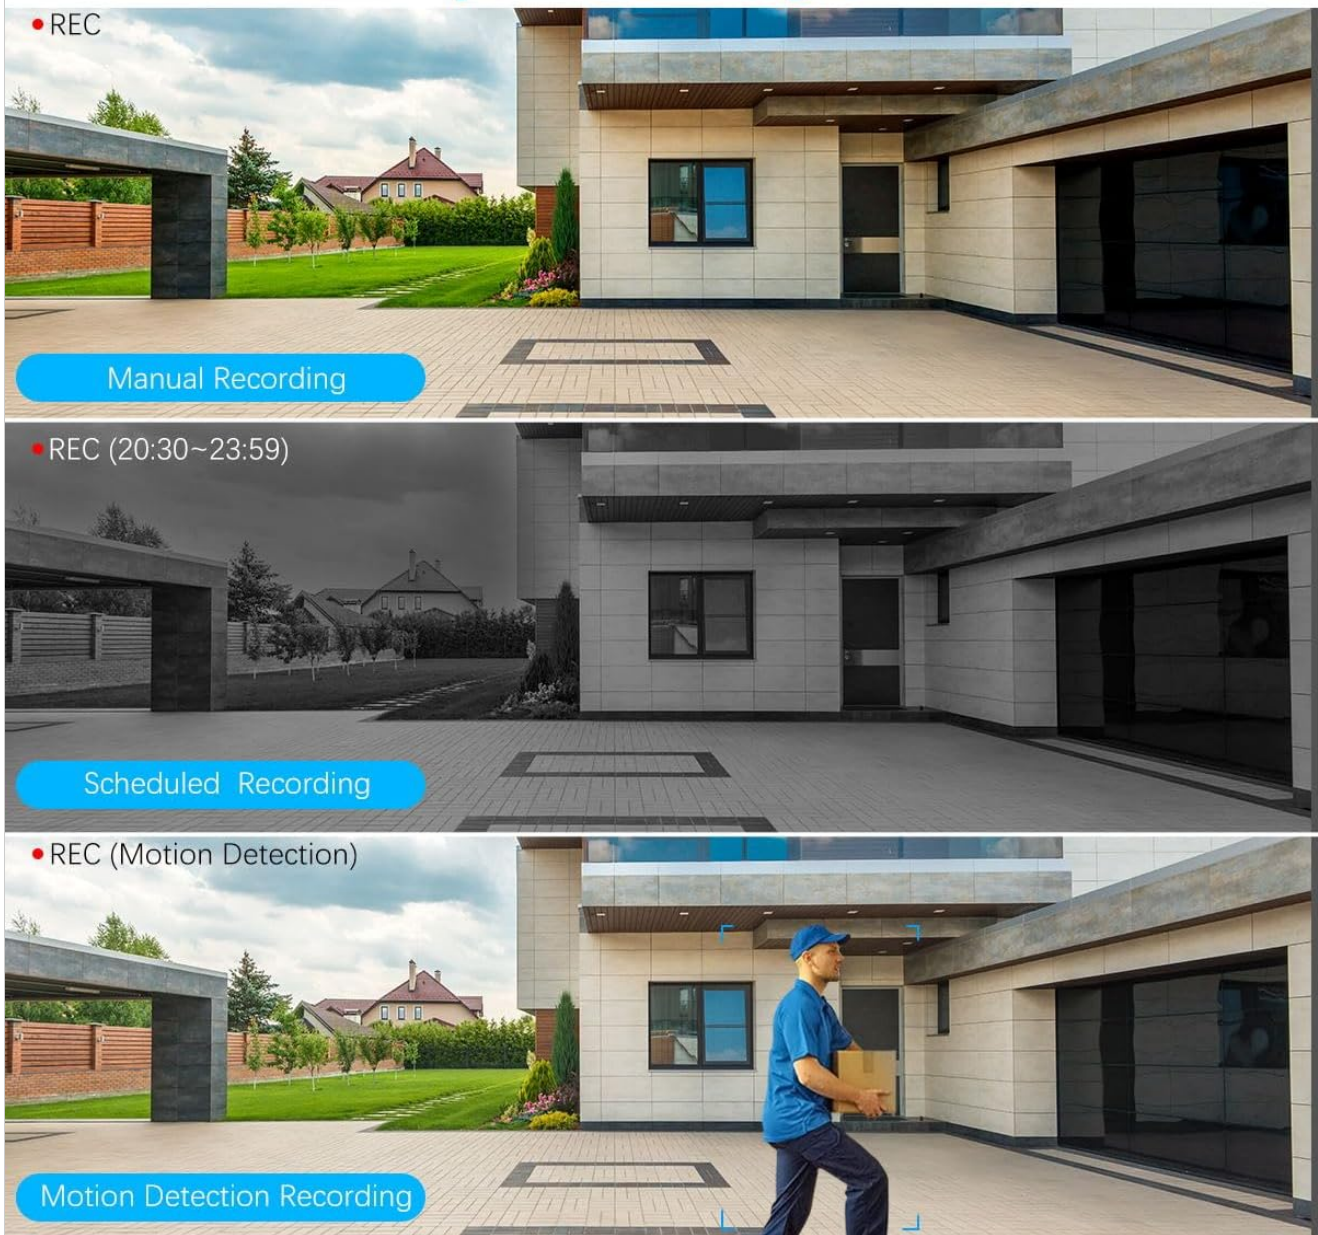

**Image:** Illustration of the multiple recording modes available, including manual, scheduled, and motion detection recording.

## 6. MAINTENANCE

To ensure the longevity and optimal performance of your OOSXX security system, consider the following maintenance tips:

- **Regular Cleaning:** Periodically clean the camera lenses with a soft, damp cloth to remove dust and dirt that may obstruct the view.
- **Cable Inspection:** Check all network cables and power connections for any signs of wear, damage, or loose connections.
- **Firmware Updates:** Regularly check for and install any available firmware updates for the NVR and cameras to ensure the latest features and security patches.
- **Waterproof Integrity:** Ensure the waterproof connectors are properly sealed, especially after installation or maintenance, to maintain the IP67 rating.



## Waterproof for Connector



**Image:** Detailed view of the professional-grade waterproof wiring port, demonstrating how to ensure a secure and weather-resistant connection for the camera.

## 7. TROUBLESHOOTING

If you encounter issues with your OOSSXX security system, refer to the following common troubleshooting steps:

- **No Video Display:**

- Check power connections to the NVR and cameras.
- Ensure HDMI/VGA cables are securely connected to the NVR and monitor.
- Verify network cables are properly connected between cameras and NVR.

- **No Remote Access:**

- Confirm the NVR is connected to the internet router.
- Check your router's internet connection.
- Ensure the "Honestview" app is updated to the latest version.

- **Poor Image Quality:**

- Clean camera lenses to remove any obstructions.
- Adjust camera position to avoid direct light sources or reflections.
- Check network cable integrity for potential signal degradation.

- **Motion Detection Not Working:**

- Verify motion detection settings in the NVR or app are correctly configured.
- Ensure notification settings on your phone are enabled for the "Honestview" app.

For further assistance, please contact OOSSXX customer support.

## 8. SPECIFICATIONS

Feature	Detail
Brand	OOSSXX
Model Number	4Cams-2TB (ASIN: B0FS1NBNVW)
Connectivity Technology	IEEE802.11at/af, POE, Wired
Video Capture Resolution	3840 x 2160 (4K UHD 2160p)
Special Features	130° Ultra Wide-Angle Lens, 4K Ultra High Definition, IP67 Waterproof, One-Way Audio, Plug and Play PoE System
Number of Channels	8 (NVR)
Memory Storage Capacity	2 TB
Power Source	Corded Electric
Operating System	Linux
Compatible Devices	Cameras, Laptops, Personal Computers, Smartphones, TV
Night Vision Range	65 Feet
Frame Rate	15fps

Recording Mode	Event, Schedule
Hardware Interface	HDMI, USB, VGA
Item Weight	8 Pounds
Item Dimensions	11 x 7 x 13 inches

## 9. WARRANTY AND SUPPORT

---

Your OOSXX security system comes with a US Location Manufacturer Warranty of 1 year from the date of purchase. For technical support, troubleshooting, or warranty claims, please contact OOSXX customer service. You can find contact information on the official OOSXX website or through your purchase platform.