

[Manuals.plus](#) /

> [odorpower](#) /

> odorpower 0322B-CL ORB Flush Mount Ceiling Light Fixture User Manual

odorpower 0322B-CL

odorpower 0322B-CL ORB Flush Mount Ceiling Light Fixture User Manual

Model: 0322B-CL ORB

1. PRODUCT OVERVIEW

This manual provides instructions for the odorpower 2-bulb flush mount ceiling light fixture, model 0322B-CL ORB. This fixture features an oil-rubbed bronze finish and a clear seeded glass shade, designed for indoor use in various rooms such as bedrooms, hallways, and kitchens.



A close-up view of the odorpower flush mount ceiling light fixture, showcasing its oil-rubbed bronze finish, clear seeded glass shade, and two E26 bulb sockets.

2. IMPORTANT SAFETY INSTRUCTIONS

Read all instructions carefully before installation. Failure to do so may result in electric shock, fire, or

other injuries. This product is UL listed for safety.

- **WARNING:** To avoid electric shock, disconnect power at the circuit breaker or fuse box before installation or servicing.
- All electrical connections must be in accordance with local codes and the National Electric Code (NEC). If you are unfamiliar with proper electrical wiring connections, consult a qualified electrician.
- Do not install this fixture in wet locations. It is rated for indoor use.
- Ensure the fixture is securely mounted to a structural part of the building.
- Do not exceed the maximum wattage specified for the bulbs.
- Handle glass components with care to prevent breakage.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation. If any parts are missing or damaged, contact customer support.

- Light Fixture Body (Oil-Rubbed Bronze)
- Glass Shade
- Mounting Hardware (screws, wire nuts, mounting bracket)
- Instruction Manual

Note: Light bulbs are not included.

4. PRODUCT SPECIFICATIONS

Specification	Detail
Brand	odorpower
Model Name	0322B-CL ORB
Color	Oil-Rubbed Bronze
Material	Metal, Glass
Style	Modern
Light Fixture Form	Ceiling (Flush Mount)
Product Dimensions	13" L x 13" W x 4.13" H
Indoor/Outdoor Usage	Indoor
Power Source	AC/DC
Bulb Base	E26 Standard Sockets (2 bulbs)
Max Wattage per Bulb	60W (Bulbs not included)
Voltage	110-120V
Compatibility	CFL, Incandescent, LED, Halogen bulbs; most standard dimmers

Item Weight

6.2 pounds

PRODUCT DIMENSION



BULB NOT
INCLUDED

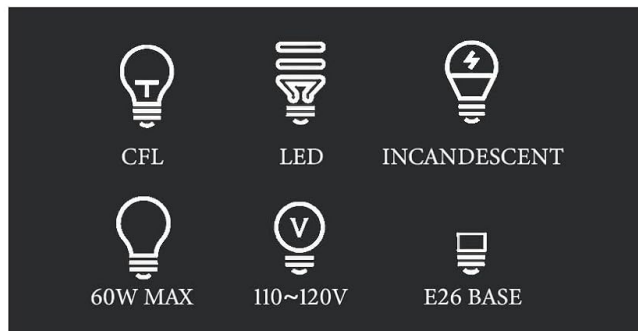


Diagram illustrating the light fixture's dimensions (13 inches L x 13 inches W x 4.13 inches H) and compatible bulb types: CFL, LED, Incandescent, 60W Max, 110-120V, E26 Base.

5. INSTALLATION GUIDE

Tools Required (Not Included):

- Phillips Head Screwdriver
- Wire Strippers
- Electrical Tape
- Safety Glasses
- Ladder

Installation Steps:

1. **Turn Off Power:** Before starting, ensure the power to the circuit at the main fuse box or circuit breaker is completely off.
2. **Prepare Mounting:** Attach the mounting bracket to the junction box in the ceiling using the

provided screws. Ensure it is securely fastened.

3. **Wire Connections:** Connect the electrical wires from the fixture to the corresponding wires from the junction box.
 - Connect the **black** wire (live) from the fixture to the **black** wire (live) from the junction box.
 - Connect the **white** wire (neutral) from the fixture to the **white** wire (neutral) from the junction box.
 - Connect the **ground** wire (bare copper or green) from the fixture to the **ground** wire from the junction box.

Secure all connections with wire nuts and wrap with electrical tape for added safety.

4. **Mount Fixture Body:** Carefully push the wired fixture body up to the ceiling, aligning the mounting holes on the fixture with the screws on the mounting bracket. Secure the fixture in place with the decorative nuts or screws provided.
5. **Install Bulbs:** Screw two E26 base bulbs (not included, max 60W each) into the sockets.
6. **Attach Glass Shade:** Carefully place the glass shade onto the fixture body and secure it according to the specific design (e.g., using a threaded ring or screws).
7. **Restore Power:** Once installation is complete and all components are secure, restore power at the circuit breaker.



Clear Glass Shade



Metal Frame Black Finish



PRODUCT DETAILS



E26 Bulb Base
(Bulb Not Included)



Close-up images highlighting the clear glass shade, the oil-rubbed bronze metal frame, and the E26 bulb base within the fixture, relevant for assembly.

6. OPERATING YOUR LIGHT FIXTURE

Once installed and powered, the odorpower flush mount light fixture operates via a standard wall switch connected to the circuit. This fixture is compatible with E26 base bulbs, including CFL, incandescent, LED, and halogen types, up to 60 watts per socket.

If using dimmable bulbs and a compatible dimmer switch (not included), the light output can be adjusted. Ensure that both the bulbs and the dimmer switch are rated for dimming functionality.

7. CARE AND MAINTENANCE

Regular maintenance ensures the longevity and appearance of your light fixture.

- **Cleaning:** Always turn off the power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish or glass.
- **Bulb Replacement:** Ensure the power is off and bulbs have cooled before attempting to replace them. Unscrew old bulbs and screw in new E26 base bulbs, ensuring they do not exceed 60 watts each. The open-bottom design simplifies bulb replacement.
- **Glass Shade:** The clear glass shade can be removed for thorough cleaning if necessary. Handle with care.

8. TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	No power to the fixture Loose wire connections Faulty bulb	Check circuit breaker/fuse Verify all wire connections are secure (power off first) Replace bulb with a new, working one
Light flickers	Loose bulb Incorrect bulb type for dimmer Loose wire connection	Tighten bulb Ensure bulbs are dimmable and compatible with dimmer Check wire connections (power off first)
Bulbs burn out quickly	Incorrect wattage Poor quality bulbs	Ensure bulbs do not exceed 60W Use reputable brand bulbs

9. WARRANTY AND CUSTOMER SUPPORT

The odorpower 0322B-CL ORB Flush Mount Ceiling Light Fixture is covered by a **two-year warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

For warranty claims, technical assistance, or any questions regarding your product, please contact odorpower customer service. Refer to your purchase documentation for specific contact details or visit the odorpower brand store on Amazon.

Online Support: [Visit the odorpower Store on Amazon](#)