

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [EMEET](#) /

› [EMEET C60E 4K Webcam and HS50 Wired Headset User Manual](#)

## EMEET C60E & HS50

# EMEET C60E 4K Webcam and HS50 Wired Headset User Manual

Model: C60E & HS50

## INTRODUCTION

---

This manual provides detailed instructions for the setup, operation, and maintenance of your EMEET C60E 4K Webcam and EMEET HS50 Wired Headset. Please read this manual thoroughly before using the devices to ensure optimal performance and longevity.

## PRODUCT OVERVIEW

---

### EMEET C60E 4K Webcam

The EMEET C60E is a high-performance 4K webcam designed for clear video communication. It features advanced imaging and audio capabilities for professional and personal use.

- **4K Ultra HD Resolution:** Delivers crisp 3840x2160 video at 30 frames per second.
- **PDAF Autofocus:** Ensures sharp focus even with movement.
- **Automatic Light Correction:** Adjusts to various lighting conditions for optimal image quality.
- **Dual Noise-Cancelling Microphones:** Captures clear audio up to 8 feet, reducing background noise.
- **73° Field of View (FOV):** Provides a balanced perspective for individual or small group use.
- **USB Plug & Play:** No drivers required for installation.
- **Privacy Cover:** Integrated cover for enhanced privacy when not in use.

# Dual Noise-Cancelling Mics

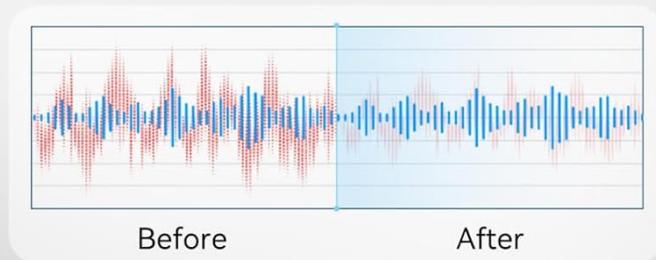


Image: The EMEET C60E 4K Webcam provides superior image quality, as shown by the clear 4K resolution compared to a blurred standard image.



## No Driver Required, USB-A Plug & Play

Image: A user on a video call demonstrating the effectiveness of the dual noise-cancelling microphones on the EMEET C60E webcam, showing a waveform before and after noise cancellation.

### EMEET HS50 Wired Headset

The EMEET HS50 is a comfortable and versatile wired headset designed for extended use in various communication environments.

- **Lightweight Design:** Weighs approximately 0.27 lb for all-day comfort.
- **Adjustable Headband and Earpads:** Customizable fit for various head sizes with 10° earpad adjustment.
- **270° Flexible Microphone:** Allows for precise positioning and can be rotated out of the way.
- **In-Line Controls:** Easy access to volume adjustment, microphone mute, and speaker mute.
- **USB Connectivity:** Simple plug-and-play connection.

# Adjustable Headband

---



Image: The EMEET HS50 Wired Headset, highlighting its lightweight and comfortable design with feather illustrations.

# 270° Flexible Microphone

---



Image: Detailed view of the EMEET HS50 headset's adjustable headband and the 10-degree swivel capability of its earpads for a customized fit.



Image: The EMEET HS50 headset's microphone demonstrating its 270-degree flexible rotation for optimal positioning.

## SETUP GUIDE

---

### EMEET C60E 4K Webcam Setup


1. **Connect the Webcam:** Plug the USB-A cable from the EMEET C60E webcam into an available USB port on your computer.
2. **Automatic Installation:** The webcam is plug-and-play. Your operating system (Windows, macOS) will

automatically detect and install the necessary drivers. No manual driver installation is typically required.

3. **Position the Webcam:** Mount the webcam securely on top of your monitor or place it on a flat surface. Adjust the angle as needed.
4. **Verify Connection:** Open a video conferencing application (e.g., Zoom, Skype, Google Meet) or your computer's camera application to confirm the webcam is recognized and displaying video.
5. **Adjust Resolution (Optional):** The default video resolution may be 1080P. To switch to 4K, use your built-in camera software or applications like PotPlayer/OBS.

## Wide Compatibility

Compatible With Mainstream Media Platforms,  
Conference Software, And Switch2

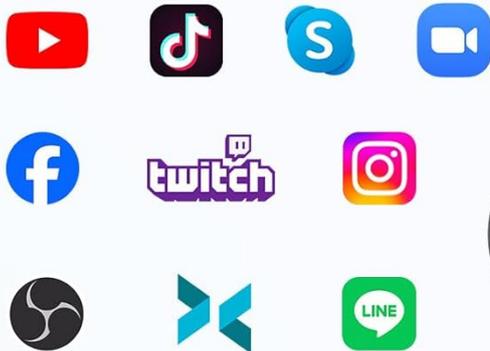

windows



Mac OS

Image: The EMEET C60E webcam's USB-A cable being connected to a laptop, illustrating its plug-and-play functionality.

### EMEET HS50 Wired Headset Setup

1. **Connect the Headset:** Plug the USB cable from the EMEET HS50 headset into an available USB port on your computer.
2. **Automatic Installation:** The headset is plug-and-play. Your operating system will automatically detect and configure the audio device.
3. **Adjust for Comfort:**
  - Adjust the headband to fit your head comfortably.

- Rotate the earpads up to 10° to ensure a snug fit over your ears.
4. **Position the Microphone:** Rotate the flexible microphone boom to position the microphone near your mouth for optimal voice pickup. It can rotate 270° to be used on either side or moved out of the way when not needed.
  5. **Verify Audio Settings:** In your computer's sound settings or communication application, ensure the EMEET HS50 is selected as the input (microphone) and output (speaker) device.

## OPERATING INSTRUCTIONS

---

### EMEET C60E 4K Webcam Operation

- **Using with Applications:** Select the EMEET C60E as your video and audio device within your preferred video conferencing software (e.g., Zoom, Microsoft Teams, Google Meet, Skype).
- **EMEETLINK Software:** Download and install the EMEETLINK software from the official EMEET website for advanced settings. This software allows you to:
  - Adjust brightness, contrast, and saturation.
  - Activate backlight compensation for improved visibility in challenging lighting.
  - Update firmware.
- **Privacy Cover:** Slide the integrated privacy cover over the lens when the webcam is not in use to ensure your privacy.

### EMEET HS50 Wired Headset Operation

The HS50 headset features convenient in-line controls for managing your audio during calls or media playback.

# 4K Ultra HD Image Quality

3840×2160 Resolution For Clear Image Quality  
And Enhanced Video Call Experience

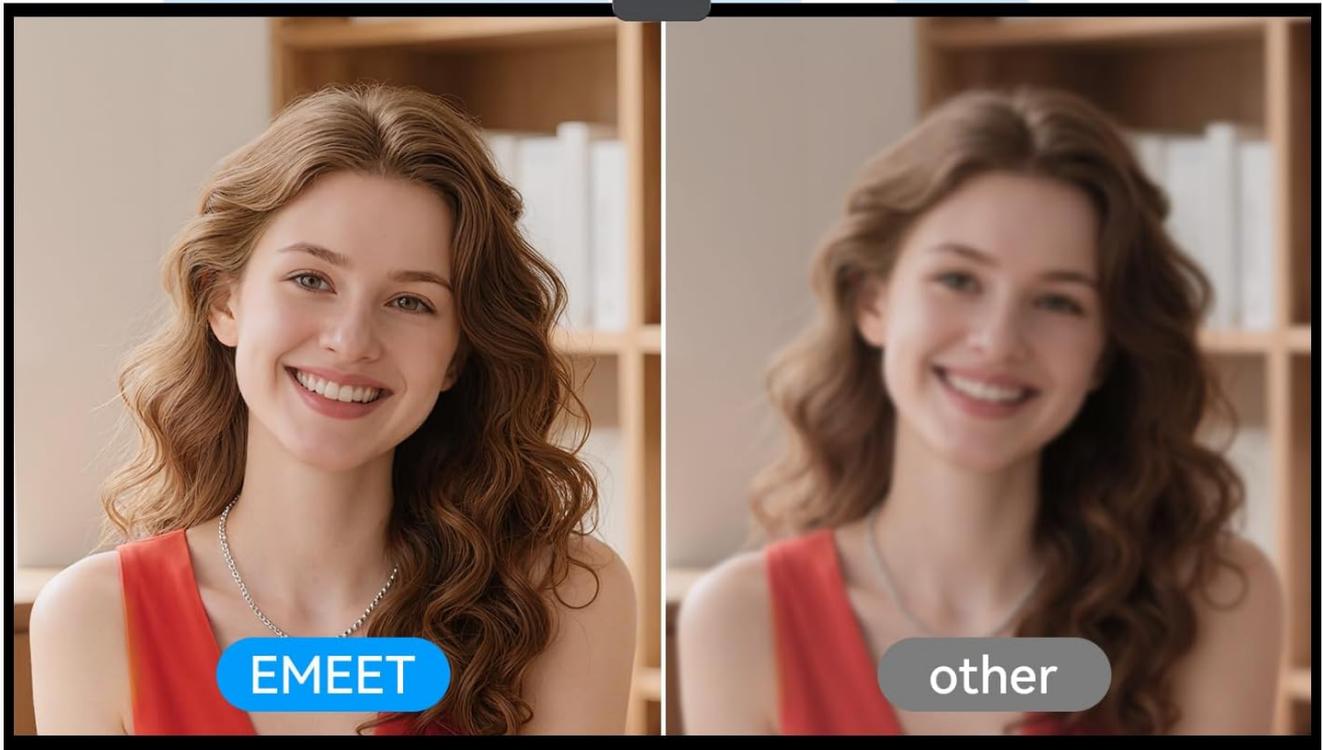


Image: Close-up of the EMEET HS50 headset's in-line control unit, showing buttons for microphone mute, volume up/down, and speaker on/off, along with LED indicators.

- **Volume Control:** Use the **+** and **-** buttons on the in-line control unit to adjust the speaker volume.
- **Microphone Mute:** Press the **microphone icon** button to mute or unmute your microphone. An LED indicator will show the mute status.
- **Speaker Mute/On-Off:** Press the **speaker icon** button to turn the speaker audio on or off. An LED indicator will show the speaker status.
- **Microphone Positioning:** Adjust the 270° flexible microphone boom to ensure the microphone is optimally positioned for your voice.

## MAINTENANCE

---

- **Cleaning:** Use a soft, dry cloth to clean the exterior surfaces of both the webcam and headset. For the webcam lens, use a lens cleaning cloth.
- **Avoid Liquids:** Do not use liquid cleaners or aerosols directly on the devices.
- **Storage:** When not in use, store the devices in a clean, dry place away from extreme temperatures.
- **Cable Care:** Avoid sharp bends or excessive pulling on the USB cables to prevent damage.

## TROUBLESHOOTING

---

### Webcam Troubleshooting

- **Webcam Not Detected:**

- Ensure the USB cable is securely connected to both the webcam and your computer.
- Try plugging the webcam into a different USB port.
- Restart your computer.
- Check your operating system's device manager to see if the webcam is listed.

- **No Video or Poor Video Quality:**

- Ensure the privacy cover is open.
- Check lighting conditions; ensure adequate front lighting.
- Verify that the correct webcam is selected in your application's settings.
- Use EMEETLINK software to adjust video settings like brightness and contrast.
- Ensure your computer meets the system requirements for 4K video streaming.

- **No Audio from Webcam Microphones:**

- Ensure the EMEET C60E is selected as the microphone input device in your computer's sound settings and your application.
- Check application-specific mute settings.

### Headset Troubleshooting

- **Headset Not Detected:**

- Ensure the USB cable is securely connected to both the headset and your computer.
- Try plugging the headset into a different USB port.
- Restart your computer.

- **No Audio from Headset Speakers:**

- Check the in-line control unit to ensure the speaker is not muted and volume is turned up.
- Verify that the EMEET HS50 is selected as the audio output device in your computer's sound settings and your application.
- Adjust the volume on your computer.

- **Microphone Not Working on Headset:**

- Check the in-line control unit to ensure the microphone is not muted.
- Verify that the EMEET HS50 is selected as the microphone input device in your computer's sound settings and your application.
- Ensure the microphone boom is positioned correctly.

## SPECIFICATIONS

---

### EMEET C60E 4K Webcam

<b>Resolution</b>	4K Ultra HD (3840x2160)
<b>Frame Rate</b>	30 FPS
<b>Sensor Type</b>	CMOS
<b>Focus Type</b>	PDAF Autofocus
<b>Field of View (FOV)</b>	73°
<b>Microphones</b>	Dual Noise-Cancelling Mics (up to 8 ft range)
<b>Connectivity</b>	USB-A Plug & Play
<b>Compatibility</b>	Windows, macOS, Android TV, major conferencing platforms

## EMEET HS50 Wired Headset

<b>Weight</b>	Approx. 0.27 lb (122g)
<b>Microphone</b>	270° Flexible Microphone
<b>Controls</b>	In-line: Volume +, Volume -, Mic Mute, Speaker Mute
<b>Connectivity</b>	USB-A
<b>Earpad Adjustment</b>	10° angle adjustment

## WARRANTY AND SUPPORT

---

EMEET products are designed for reliability and performance. For detailed warranty information, please refer to the warranty card included with your product or visit the official EMEET website. If you encounter any issues or require technical assistance, please contact EMEET customer support through their official channels. You can typically find support contact information on the EMEET website or within your product packaging.

**Official EMEET Website:** [www.emeet.com](http://www.emeet.com)