

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Kuulaa](#) /

› [Kuulaa Qi2 MagSafe Power Bank 15W Wireless Portable Charger 10000mAh KL-YD92 User Manual](#)

Kuulaa KL-YD92

Kuulaa Qi2 MagSafe Power Bank (Model: KL-YD92) User Manual

Brand: Kuulaa

Model: KL-YD92

INTRODUCTION

The Kuulaa Qi2 MagSafe Power Bank is a 10000mAh portable charger designed for iPhone 12-17 series, offering 15W wireless and 20W USB-C fast charging. It features a smart TFT display and a foldable stand for convenient use. This manual provides instructions for safe and efficient operation of your power bank.

Key Features:

- Qi2 Certified 15W MagSafe Fast Charging for precise alignment and reliable performance.
- 10000mAh Compact Power for Travel, providing up to 1.3 full charges for an iPhone 16 Pro.
- 20W USB-C Fast Charging Option for wired output to various devices.
- Smart TFT Display showing real-time battery level, charging speed, and power status.
- Foldable Stand for hands-free viewing during charging.
- Optimized for iPhone 17, 16, 15, 14, 13, and 12 series with strong magnetic alignment.

PACKAGE CONTENTS

Please check the package contents upon unboxing:

- Kuulaa Qi2 MagSafe Power Bank (KL-YD92)
- USB-C to USB-C Charging Cable
- User Manual



Wildly Compatible

Wireless Use



With USB C Cable Inside

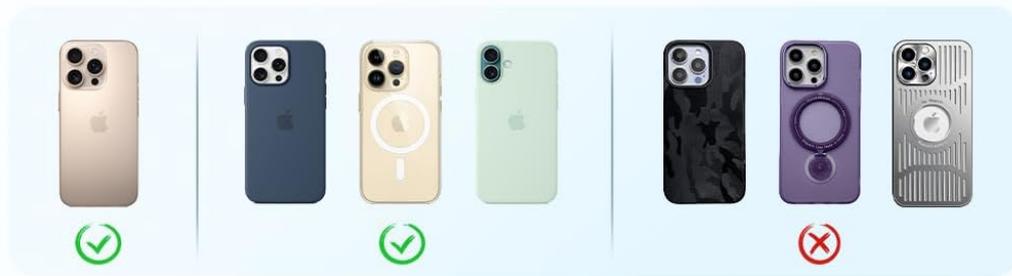


Figure 1: Package Contents

PRODUCT OVERVIEW

Familiarize yourself with the components of your Kuulaa Qi2 MagSafe Power Bank.



Figure 2: Smart TFT Display Details

- **MagSafe Charging Surface:** For wireless charging compatible devices.
- **Smart TFT Display:** Shows battery percentage, input/output wattage, and foreign object detection.
- **Power Button:** Activates the display and controls power.
- **USB-C Port:** For charging the power bank and wired charging other devices.

- **Foldable Stand:** Integrated stand for hands-free viewing.

SETUP

1. Charging the Power Bank

Before first use, fully charge your Kuulaa Qi2 MagSafe Power Bank.

1. Connect the provided USB-C to USB-C cable to the power bank's USB-C port.
2. Connect the other end of the cable to a compatible USB-C wall adapter (not included). For optimal charging speed, use a 20W or higher power adapter.
3. The Smart TFT Display will show the charging status and battery percentage. The power bank is fully charged when the display shows 100%.



Figure 3: Charging the Power Bank

OPERATING INSTRUCTIONS

1. Wireless Charging (MagSafe Compatible)

This power bank supports 15W Qi2 wireless charging for compatible devices, primarily iPhone 12 series and newer.

1. Ensure your device is MagSafe compatible. For optimal magnetic attachment and charging, use an iPhone 12 series or newer, or a MagSafe-compatible case.
2. Align your iPhone with the magnetic charging surface of the power bank. The magnets will snap into place, ensuring correct alignment.
3. The Smart TFT Display will indicate wireless charging is active and show the charging speed.

10000mAh Your All-Day Companion



100%

QI2

KUULAA

Device	Charging Times
iPhone 16 ProMax	1.2 times
iPhone 16 Pro	1.7 times
Galaxy 24 Ultra	1.1 times
iPad Pro 11	1.0 times

Product data calculated from engineering formulas. actual performance may vary.

Figure 4: Wireless Charging an iPhone



Figure 5: Secure Magnetic Attachment



Figure 6: Wireless Charging Speed Example

2. Wired Charging (USB-C)

The USB-C port supports 20W fast charging for a wide range of devices, including other smartphones, tablets, and earbuds.

1. Connect your device to the power bank's USB-C port using a compatible USB-C cable.
2. The Smart TFT Display will show wired charging is active and display the output wattage.



Figure 7: Wired Charging via USB-C

Note: The power bank can charge multiple devices simultaneously (one wirelessly, one via USB-C), but total output will be shared.

3. Using the Foldable Stand

The integrated foldable stand allows for hands-free viewing of your device while charging.

1. Gently pull out the metal stand from the back of the power bank.
2. Adjust the stand to your desired viewing angle.
3. Place your magnetically attached iPhone (or other device) on the stand.



Figure 8: Using the Foldable Stand

KUULAA

Qi2 Magnetic

Wireless Power Bank 10000mAh

Fast & Fun Accessories for iPhone.



Figure 9: Travel Convenience with Foldable Stand

4. Airplane Mode (Disable Wireless Charging)

To comply with airline regulations or if you only wish to use the stand function, you can disable wireless charging.

- Double-click the power button.
- Wait for approximately 2 seconds. The wireless charging function will be disabled. The power bank can then be used solely as a magnetic phone stand.

10000mAh
Charging Times

<1.8 times iPhone 16	1.8 times iPhone 15
1.8 times iPhone 15 Pro	1.2 times iPhone 15 Pro Max

*Data is derived from test results of wired charging with the screen off

Figure 10: Airplane Friendly Mode

MAINTENANCE

- Keep the power bank away from water, fire, and high temperatures.
- Avoid dropping or subjecting the device to strong impacts.
- Clean the device with a dry, soft cloth. Do not use corrosive cleaners.
- Store the power bank in a cool, dry place when not in use.
- For optimal battery life, fully charge the power bank at least once every three months.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Power bank not charging.	Cable or adapter issue; power bank fully discharged.	Ensure the USB-C cable and wall adapter are functioning correctly. Try a different cable or adapter. Allow sufficient time for a fully discharged power bank to initiate charging.
Device not charging wirelessly.	Misalignment; non-MagSafe device/case; foreign object; wireless charging disabled.	Realign the device on the charging surface. Ensure your device or case is MagSafe compatible. Remove any metal objects between the power bank and device. Double-check if wireless charging is accidentally disabled (refer to "Airplane Mode" section).
Slow charging.	Low power adapter; multiple devices charging; high device usage.	Use a 20W or higher USB-C wall adapter for charging the power bank. Avoid charging multiple devices simultaneously for faster individual charging. Reduce device usage during charging.
Smart TFT Display not showing information.	Display timeout; power bank off.	Press the power button once to reactivate the display. The display has a timeout feature to conserve power.
Power bank gets warm during charging.	Normal operation.	It is normal for the power bank to become slightly warm during charging or discharging. If it becomes excessively hot, discontinue use and contact support.

SPECIFICATIONS

Feature	Detail
Model Number	KL-YD92
Battery Capacity	10000mAh (38.5Wh)
Wireless Charging Output	15W (Qi2 Certified)
USB-C Output	20W Max (5V/3A, 9V/2.22A, 12V/1.67A)
USB-C Input	18W Max (5V/3A, 9V/2A, 12V/1.5A)
Product Dimensions	4.2 x 2.8 x 0.6 inches
Item Weight	7 ounces
Special Features	Digital Display, Fast Charging, Lightweight, Pocket Size, Wireless Charging, Foldable Stand
Manufacturer	Shenzhen Kula Technology Co.,Ltd

WARRANTY AND SUPPORT

Kuulaa products come with a standard manufacturer's warranty. For detailed warranty information, product support, or technical assistance, please refer to the official Kuulaa website or contact their customer service directly.

Please retain your proof of purchase for warranty claims.

OFFICIAL PRODUCT VIDEOS

Your browser does not support the video tag.

Video 1: Kuulaa Qi2 MagSafe Power Bank 15W 10000mAh & Foldable Stand. This video provides a quick overview of the power bank's features, including its magnetic attachment and foldable stand.