Zippo HeatBank 6 Pro

Zippo HeatBank 6 Pro Rechargeable Hand Warmer Instruction Manual

1. Introduction

The Zippo HeatBank 6 Pro is a versatile rechargeable device designed to provide warmth, portable power, and illumination. It features a durable, waterproof, dustproof, and dropproof construction, making it suitable for various outdoor activities. This manual provides essential information for the safe and effective use of your HeatBank 6 Pro.

2. Safety Information

Please read all instructions and warnings before using this product to prevent injury or damage. Keep this manual for future reference.

- Do not expose the device to extreme temperatures (above 50°C / 120°F or below 0°C / 32°F) or direct sunlight for extended periods.
- Avoid dropping or subjecting the device to severe impacts.
- Do not attempt to disassemble, repair, or modify the device. This will void the warranty and may cause hazards.
- Keep out of reach of children.
- This product does not use any fuel or burners. It is an electric rechargeable device.
- If the device becomes excessively hot, emits smoke, or shows any signs of damage, discontinue use immediately.
- Ensure the port cover is securely closed when not in use to maintain IP57 dust and waterproof rating.

3. Package Contents

Verify that all items are present in your package:

- Zippo HeatBank 6 Pro Rechargeable Hand Warmer

- Neck Lanyard
- USB Charging Cable (Micro-USB to USB-A)



Image: The Zippo HeatBank 6 Pro shown alongside its neck lanyard and the included USB charging cable.

4. Product Overview

Familiarize yourself with the components of your HeatBank 6 Pro.

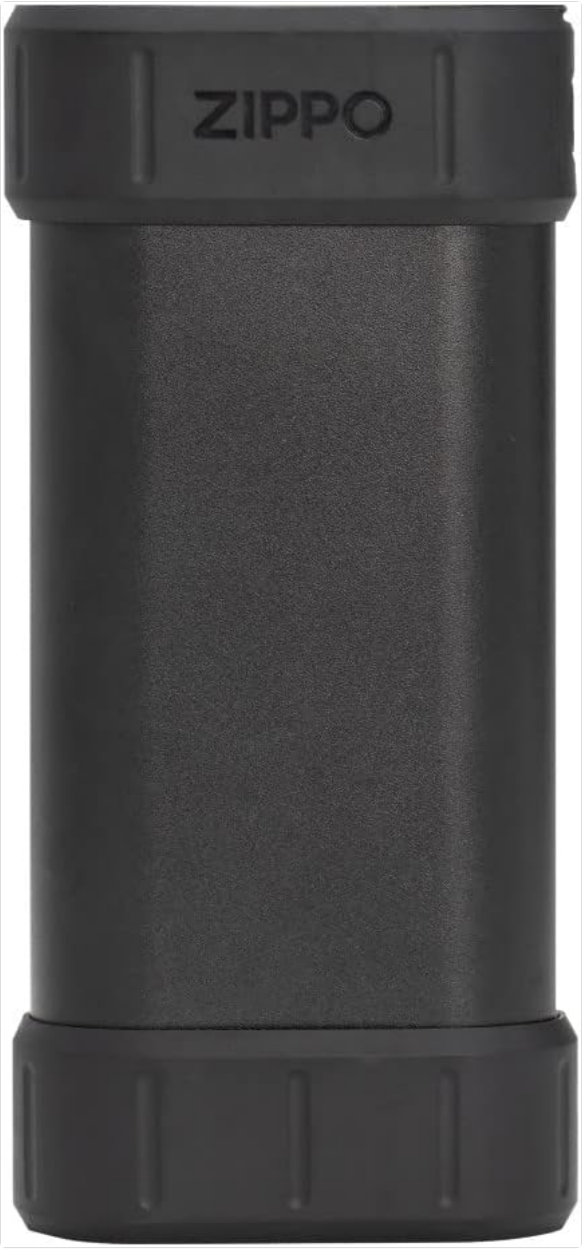


Image: Front view of the HeatBank 6 Pro, displaying the Zippo logo on the top cap.

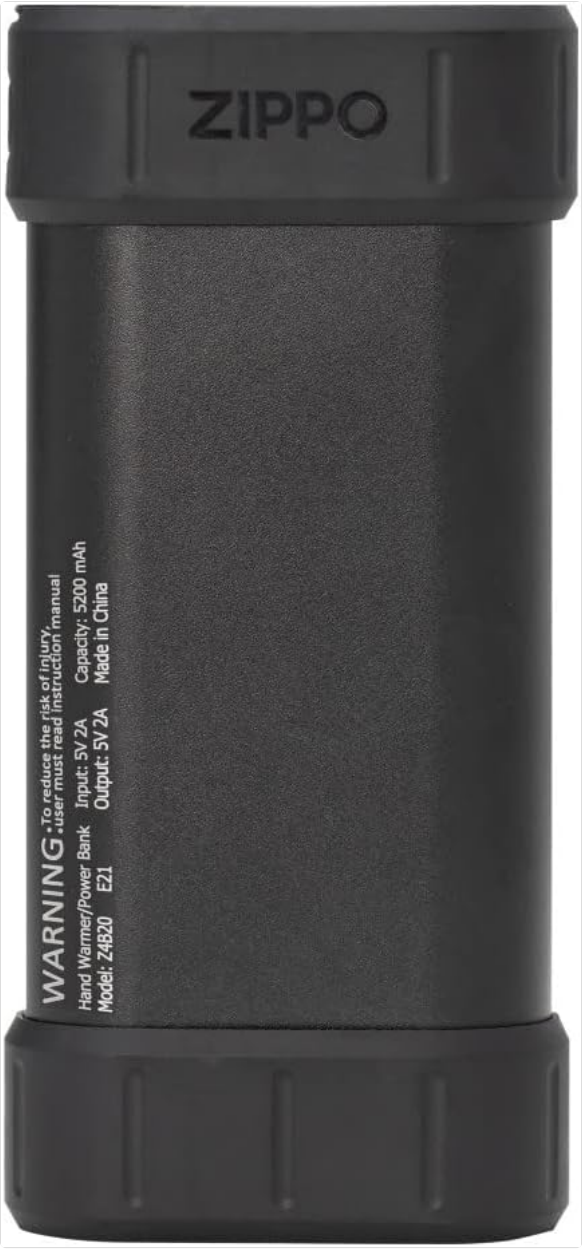


Image: Back view of the HeatBank 6 Pro, showing a warning label with model number Z4B20, input/output specifications, and capacity.



Image: Side view of the HeatBank 6 Pro, highlighting the multi-function power button on the top cap.



Image: The top end of the HeatBank 6 Pro with its protective cover open, showing the USB-A output port, Micro-USB input port, LED flashlight, and blue LED indicator lights.

5. Setup

Initial Charging

Before first use, fully charge your HeatBank 6 Pro. The device comes with a rechargeable 5,200 mAh lithium-ion battery.

1. Open the protective cover on the top end of the HeatBank to access the charging ports.
2. Connect the smaller Micro-USB end of the included USB charging cable to the Micro-USB input port on the HeatBank.
3. Connect the larger USB-A end of the cable to a powered USB port (e.g., computer, wall adapter, power bank).
4. The blue LED indicator lights will illuminate and flash to show charging progress. All four lights will be solid when fully charged.
5. Once charging is complete, disconnect the cable and securely close the protective port cover.

6. Operating Instructions

The HeatBank 6 Pro features a single multi-function button for controlling its various features.



Image: A visual guide illustrating the operational steps for the HeatBank 6 Pro, including powering on, adjusting heat settings, activating the flashlight, and using it to charge other devices.

Powering On/Off and Heat Settings

1. **To Power On:** Press and hold the power button for approximately 3 seconds. The device will power on in the low temperature setting, indicated by one blue LED light.
2. **To Adjust Heat:** Once powered on, press the power button briefly to cycle through the three heat settings. Each press will increase the temperature level, indicated by additional blue LED lights (1 light for low, 2 for medium, 3 for high). The device provides 360° heat up to 120°F / 50°C.
3. **To Power Off:** Press and hold the power button for approximately 3 seconds until all LED lights turn off.

Using the Flashlight

1. **To Turn On/Off:** Double-tap the power button within one second to activate or deactivate the integrated 24 lumen LED flashlight.
2. The flashlight can be used independently or simultaneously with the heating function.



Image: A hand holding the HeatBank 6 Pro, demonstrating the integrated LED flashlight in operation.

Charging External Devices (Power Bank Function)

The HeatBank 6 Pro can charge USB-compatible devices such as mobile phones, MP3 players, tablets, and cameras.

1. Open the protective cover on the top end of the HeatBank.
2. Connect your device's charging cable (USB-A end) to the USB-A output port on the HeatBank.
3. Connect the other end of your cable to your external device.
4. The HeatBank will automatically begin charging your device. During external device charging, the heating functions are disabled.
5. Monitor your device's charging status. Disconnect when charging is complete and securely close the port cover.

7. Maintenance

Cleaning

To clean your HeatBank 6 Pro, wipe it with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners. Ensure the port cover is closed during cleaning. The device has an IP57 dust and waterproof rating, meaning it is protected from dust ingress and immersion in water up to 1 meter for 30 minutes.

Storage

Store the HeatBank in a cool, dry place away from direct sunlight and extreme temperatures. For long-term storage, it is recommended to charge the device to approximately 50% every few months to maintain battery health.

8. Troubleshooting

If you encounter issues with your HeatBank 6 Pro, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Device does not turn on or heat up.	Low battery.	Charge the HeatBank fully.

Problem	Possible Cause	Solution
Device not charging external devices.	Heat function is active; low HeatBank battery; incorrect cable/port.	Ensure heat function is off. Charge HeatBank. Use the correct USB-A output port and a functional cable.
LED indicator lights not working.	Device off; battery depleted.	Turn on the device. Charge the HeatBank.
Flashlight not turning on.	Incorrect button press; low battery.	Double-tap the power button quickly. Charge the HeatBank.

If the problem persists after attempting these solutions, please contact Zippo customer support.

9. Specifications

Feature	Specification
Model Name	HeatBank® 6 Pro Rechargeable Hand Warmer
Model Number	40633
Battery Type	Rechargeable Lithium-Ion
Battery Capacity	5,200 mAh
Heat Settings	3 (Low, Medium, High)
Maximum Temperature	120°F / 50°C
Run Time	Up to 6 hours
Flashlight	Integrated 24 Lumen LED
IP Rating	IP57 (Dustproof and Waterproof)
Material	Aluminum
Dimensions (H x W x D)	4.62″ x 2.17″ x 1.10″
Weight	6.43 oz (0.18 kg)
UPC	191693406337

10. Warranty & Support

Warranty Information

The Zippo HeatBank 6 Pro Rechargeable Hand Warmer is covered by a**1-year limited warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accident, unauthorized modification, or neglect.

Customer Support

For warranty claims, technical assistance, or any questions regarding your Zippo HeatBank 6 Pro, please visit the official Zippo website or contact their customer service department. Refer to your product packaging or the Zippo website for the most current contact information.