

## Portronics POR-3197

# Portronics Freedom 4E 15W Wireless Charger with Dual Alarm Clock User Manual

## INTRODUCTION

The Portronics Freedom 4E is a versatile device combining a 15W fast wireless charger with a digital alarm clock. It features a soft fabric charging pad, dual alarm functionality, multiple display modes, and adjustable LED brightness. This manual provides detailed instructions for setting up, operating, and maintaining your device.

## PRODUCT FEATURES

- **15W Fast Wireless Charging:** Provides efficient power delivery for compatible devices.
- **Integrated Alarm Clock:** Combines charging and time display in one compact unit.
- **Dual Alarms:** Allows setting two independent wake-up times.
- **Three Display Modes:** Switch between time, temperature, and date display.
- **Dimmable LED Display:** Adjustable brightness for comfortable viewing in any environment.
- **Soft Fabric Charging Surface:** Protects your device from scratches during charging.
- **Type-C Power Input:** Ensures stable and consistent power delivery.
- **Wide Compatibility:** Works with most wireless-charging-enabled smartphones and earbuds.

## PACKAGE CONTENTS

- Portronics Freedom 4E Wireless Charger with Dual Alarm Clock
- USB Type-C Charging Cable
- User Manual

## SETUP

1. **Connect Power:** Insert the provided USB Type-C cable into the input port on the back of the Freedom 4E. Connect the other end of the cable to a compatible USB power adapter (not included). For optimal 15W fast

charging, use an 18W or higher power adapter.

2. **Initial Power On:** The device display will light up upon successful power connection.
3. **Placement:** Place the device on a stable, flat surface, such as a bedside table or desk.

## OPERATING INSTRUCTIONS

### 1. Wireless Charging

The Freedom 4E supports up to 15W wireless charging. Ensure your device is compatible with wireless charging.

- **Charging a Device:** Place your wireless-charging-enabled smartphone or earbuds directly onto the soft fabric charging pad. Ensure the device is centered on the pad for optimal charging.
- **Charging Indicator:** The display may show a charging icon or the device's screen will indicate charging status.
- **Case Compatibility:** The charger works with most phone cases up to 2mm thick. Magnetic wallets or metal cases may interfere with charging and should be removed.



Image: A smartphone is placed on the soft fabric charging pad of the Portronics Freedom 4E, indicating 15W wireless charging in progress. The device's digital display shows the current time and date.

### 2. Setting Time and Date

Refer to the device's physical buttons (usually on the back or side) for specific time and date setting controls. Typically, there are buttons for 'SET', 'UP', and 'DOWN'.

1. Press the 'SET' button to enter time setting mode. The hour digits will flash.
2. Use 'UP'/'DOWN' buttons to adjust the hour.
3. Press 'SET' again to move to minute adjustment, then year, month, and day.
4. Press 'SET' one last time or wait for a few seconds to confirm and exit setting mode.

### 3. Setting Dual Alarms

The Freedom 4E allows you to set two separate alarms (Alarm 1 and Alarm 2).



Image: The Portronics Freedom 4E's display shows the time and two alarm icons, highlighting its dual digital alarm clock feature.

1. Press the 'ALARM 1' button (or similar, refer to device buttons) to enter Alarm 1 setting mode. The alarm hour digits will flash.
2. Use 'UP'/'DOWN' buttons to adjust the alarm hour.
3. Press 'ALARM 1' again to move to minute adjustment.
4. Press 'ALARM 1' one last time or wait to confirm. Repeat for 'ALARM 2' using its dedicated button.
5. To activate/deactivate an alarm, press the respective 'ALARM' button briefly. An alarm icon will appear/disappear on the display.

#### 4. Display Modes

The device offers three display modes: Time, Temperature, and Date. You can cycle through these modes.



Image: The Portronics Freedom 4E's display highlights its capability to show Time, Temperature, and Date, indicating the three available display modes.

- **Switching Modes:** Press the 'MODE' button (or similar) to cycle through Time, Temperature, and Date displays.

### 5. Adjusting Display Brightness

The LED display has adjustable brightness levels to suit your preference, including a night mode.

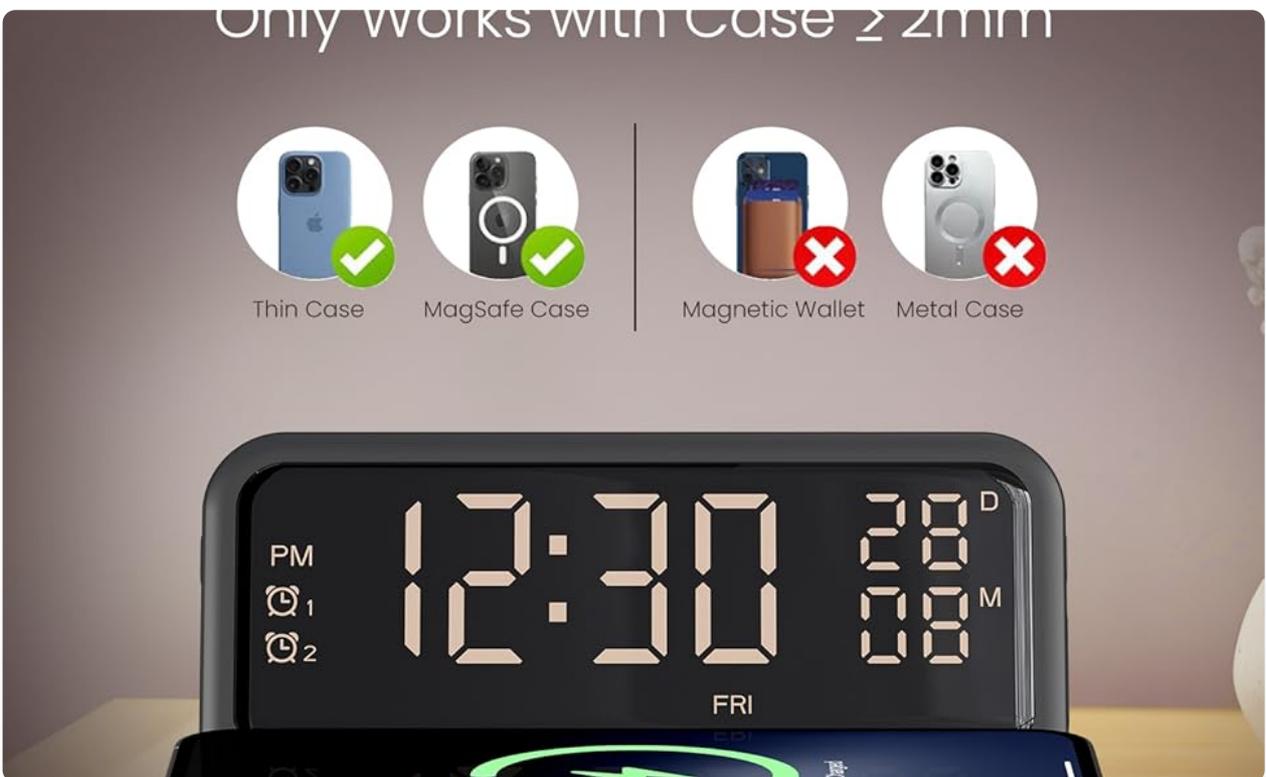


Image: The Portronics Freedom 4E's display illustrates its dimmable brightness feature, showing examples of Off, Low, Medium, and High brightness settings.

- **Brightness Control:** Use the 'DIMMER' or 'BRIGHTNESS' button (or similar) to cycle through the available

brightness levels (e.g., Bright, Normal, Night, Off).

## MAINTENANCE

---

- **Cleaning:** Use a soft, dry cloth to clean the device. Do not use abrasive cleaners or solvents.
- **Storage:** Store the device in a cool, dry place when not in use.
- **Safety:** Keep the device away from water, high temperatures, and direct sunlight. Do not attempt to disassemble or repair the device yourself.

## TROUBLESHOOTING

---

- **Device not powering on:** Ensure the USB Type-C cable is securely connected to both the device and a working power adapter. Try a different power adapter or cable.
- **Wireless charging not working:**
  - Ensure your device supports wireless charging.
  - Check if the phone is centered on the charging pad.
  - Remove any thick cases, magnetic wallets, or metal objects from your phone.
  - Ensure the power adapter is at least 18W for optimal performance.
- **Alarm not sounding:** Ensure the alarm is activated (alarm icon visible on display). Check the volume settings if applicable (though this device typically has a fixed alarm sound).
- **Display is dim or off:** Adjust the brightness settings using the dedicated button. Ensure the device is powered on.



Image: The Portronics Freedom 4E includes multiple safety protections such as overvoltage, overcurrent, overtemperature, foreign body detection, and short circuit protection.

## SPECIFICATIONS

---

Feature	Specification
Brand	Portronics
Model Number	POR-3197
Connector Type	USB Type C
Input Voltage	5 Volts
Output Current	3 Amps
Output Voltage	5 Volts
Wireless Charging Output	Up to 15W
Material	ABS Plastic
Colour	Black
Item Weight	383 Grams
Special Features	3 Display Modes, Dimmable LED Time Display, Dual Alarm Clock, Soft-Fabric Charging Surface, Wireless Charging

## WARRANTY AND SUPPORT

- **Warranty:** This product comes with a 1-Year warranty.
- **Support:** For any assistance or queries, please contact Portronics customer support.
- **Contact Information:**  
Email: [help@portronics.com](mailto:help@portronics.com)  
Phone: +91 9555-245-245  
Address: First Floor Property No D 8 Upper Basement Sector 8 Noida Uttar Pradesh 201301