

[Manuals.plus](#) /

› [Samako](#) /

› Samako CleanDetect Lite 200W Cordless Vacuum Cleaner User Manual

Samako CleanDetect Lite 200W

Samako CleanDetect Lite 200W Cordless Vacuum Cleaner User Manual

Model: CleanDetect Lite 200W

INTRODUCTION

Thank you for choosing the Samako CleanDetect Lite 200W Cordless Vacuum Cleaner. This manual provides essential information for the safe and efficient use, assembly, operation, maintenance, and troubleshooting of your new appliance. Please read it thoroughly before first use and keep it for future reference.

The Samako CleanDetect Lite 200W is a lightweight and powerful cordless stick vacuum cleaner designed for efficient daily cleaning. Its advanced features ensure a clean home without the hassle of cords, offering convenience and strong suction for various surfaces.

PACKAGE CONTENTS

Before assembly, ensure all components are present and in good condition. The package should include:

- Main Vacuum Unit
- Extension Tube
- Motorized Floor Brush
- Crevice Tool
- Dusting Brush
- Wall Mount Bracket
- Charging Adapter
- Rechargeable Battery
- User Manual (this document)

Un dispositivo, infinite possibilità


Dai tappeti ai pavimenti: prestazioni potenti su qualsiasi superficie.



Pavimento laminato



Moquette

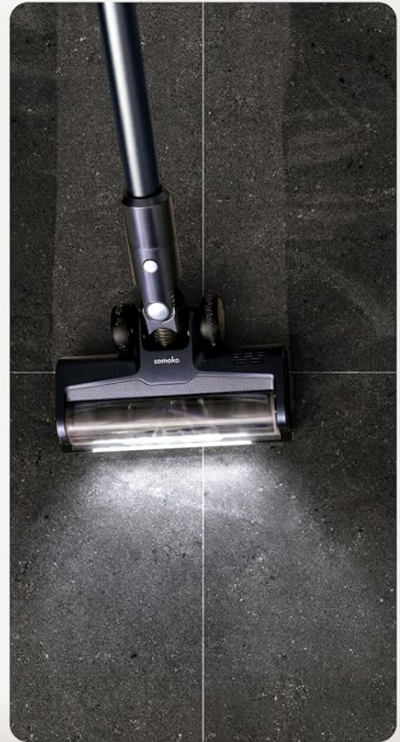

Piastrella in ceramica

Image: Main vacuum unit, extension tube, motorized floor brush, wall mount, charging adapter, and two accessory tools.

SETUP AND ASSEMBLY

1. **Attach the Extension Tube:** Align the extension tube with the main vacuum unit and push until it clicks securely into place.
2. **Attach the Floor Brush:** Connect the motorized floor brush to the other end of the extension tube, ensuring it clicks firmly. For handheld use, attach accessories directly to the main unit.
3. **Charge the Battery:** Before first use, fully charge the battery. Connect the charging adapter to the battery or the main unit (if the battery is installed) and plug it into a power outlet. The LED display will indicate charging status. A full charge takes approximately 60 minutes.
4. **Install Wall Mount (Optional):** Choose a suitable location near a power outlet. Secure the wall mount bracket to the wall using appropriate screws and anchors (not included). This allows for convenient storage and charging.

Un dispositivo, infinite possibilità

Dai tappeti ai pavimenti: prestazioni potenti su qualsiasi superficie.



Image: The Samako CleanDetect Lite 200W vacuum cleaner stored on its wall-mounted charging dock, with accessories neatly organized.

OPERATING INSTRUCTIONS

Power On/Off and Suction Modes

- Press the power button on the main unit to turn the vacuum cleaner on.
- The vacuum operates with two adjustable suction levels. Press the mode button to switch between standard and high power modes.
- The LED screen provides real-time updates on battery percentage and current power mode.

Schermo LED con aggiornamenti in tempo reale

Controlla a colpo d'occhio la durata della batteria e il livello di potenza.



Image: Close-up of the vacuum cleaner's LED screen, showing battery percentage, low power indicator, and high power indicator.

Using the Floor Brush and Accessories

- The motorized floor brush is suitable for various floor types, including hard floors and carpets. It features a 180° swivel nozzle for easy maneuverability around furniture and into tight spaces.
- The floor brush is equipped with automatic dirt sensors and LED lights to illuminate dust and debris, optimizing suction power for heavily soiled areas.
- For cleaning upholstery, crevices, or elevated surfaces, detach the extension tube and attach the crevice tool or dusting brush directly to the main unit.

Sensori automatici di sporco

La tecnologia avanzata rileva polvere e sporco, ottimizza la potenza di aspirazione e si concentra sulle zone molto sporche.



Image: The vacuum cleaner's floor brush with integrated LED lights, demonstrating automatic suction power adjustment and accurate dirt detection.

Bocchello flessibile

Raggiunge senza sforzo ogni angolo



Image: Close-up of the flexible nozzle, illustrating its 180-degree swivel capability for reaching difficult angles.

Ben ordinato

Sempre a portata di mano con il supporto a parete



Image: The vacuum cleaner effectively cleaning different surfaces, including laminate flooring, carpet, and ceramic tiles.

MAINTENANCE

Emptying the Dustbin

To maintain optimal suction, empty the 0.5L dustbin regularly, especially when it reaches the MAX fill line.

1. Ensure the vacuum cleaner is turned off.
2. Press the dustbin release button to detach it from the main unit.
3. Position the dustbin over a trash can and press the bottom release latch to open the lid and empty the contents.
4. Close the lid and reattach the dustbin to the main unit until it clicks.

Cleaning the HEPA Filter

The washable HEPA filter should be cleaned periodically to ensure efficient filtration and prevent loss of suction. It is recommended to clean it every 2-4 weeks, depending on usage.

1. Remove the dustbin as described above.

2. Twist and pull out the HEPA filter assembly from the dustbin.
3. Tap the filter gently to remove loose dust.
4. Rinse the HEPA filter and its stainless steel mesh under running water until the water runs clear. Do not use detergents.
5. Allow all filter components to air dry completely for at least 24 hours before reassembling. Do not expose to direct sunlight or heat.
6. Once dry, reassemble the filter components and place them back into the dustbin, then reattach the dustbin to the main unit.

Pulizia senza complicazioni

Il contenitore della polvere si svuota con un solo clic e i filtri HEPA e in acciaio inossidabile possono essere facilmente lavati sotto il rubinetto.



Image: The vacuum cleaner's dustbin with a one-click emptying mechanism, and the washable HEPA filter being rinsed under a faucet.

Cleaning the Brush Roll

Periodically check the brush roll for tangled hair or debris. Use scissors to cut away any tangled hair and remove it. Ensure the brush roll spins freely.

TROUBLESHOOTING

If you encounter any issues with your Samako CleanDetect Lite 200W, please refer to the following common problems and solutions:

- **No Power:**
 - Ensure the battery is fully charged.
 - Check if the battery is correctly inserted into the main unit.
 - Verify the power button is pressed firmly.
- **Reduced Suction:**
 - Empty the dustbin if it is full.
 - Clean the HEPA filter and ensure it is completely dry before reinstallation.
 - Check the extension tube and floor brush for blockages.
 - Ensure the brush roll is free of tangled hair or debris.
- **Unusual Noise:**
 - Inspect the brush roll for any foreign objects.
 - Check for blockages in the air pathways.
- **Battery Not Charging:**
 - Ensure the charging adapter is properly connected to both the battery/unit and the power outlet.
 - Verify the power outlet is functional.

If the problem persists after attempting these solutions, please contact Samako customer support for further assistance.

SPECIFICATIONS

Feature	Specification
Brand	Samako
Model Name	CleanDetect Lite 200W
Power	200 Watts
Voltage	18.5 Volts
Battery Type	Lithium
Battery Charging Time	60 Minutes
Run Time	Up to 60 minutes
Dustbin Capacity	0.5 Liters
Filter Type	Washable HEPA Filter
Weight	2.4 Kilograms
Dimensions (L x W x H)	23L x 20W x 110H cm

Noise Level	77 Decibels
Special Features	Cordless, Lightweight, Wall Mount, Low Noise, HEPA Filter, 180° Swivel Nozzle, LED Dirt Detection

WARRANTY AND SUPPORT

Samako products are manufactured to high-quality standards. For warranty information or technical support, please refer to the warranty card included with your purchase or visit the official Samako website. If you require assistance, please contact our customer service team with your product model and purchase details.

For further inquiries or support, please visit: www.samako.com

© 2026 Samako. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question