

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [BesLowe](#) /

> [BesLowe 2-Pack Outdoor Wall Lights Instruction Manual \(Model B05068PB\)](#)

BesLowe B05068PB

BesLowe 2-Pack Outdoor Wall Lights Instruction Manual

Model: B05068PB

[Introduction](#)
[Instructions](#)

[Safety Information](#)
[Maintenance](#)

[Package Contents](#)
[Troubleshooting](#)

[Setup & Installation](#)

[Operating](#)
[Specifications](#)
[Warranty & Support](#)

INTRODUCTION

Thank you for choosing the BesLowe 2-Pack Outdoor Wall Lights. These fixtures are designed to provide reliable and stylish illumination for your outdoor spaces. Crafted from rust-resistant metal and durable seeded glass, they are built to withstand various weather conditions, including sun, heavy rain, and freezing temperatures. The unique seeded glass creates a soft, inviting glow, enhancing the ambiance of your porch, patio, garage, or front door area.

This manual provides detailed instructions for the safe installation, operation, and maintenance of your new outdoor wall lights. Please read it thoroughly before installation and retain it for future reference.

All-Weather Reliability



Waterproof



Heat-Resistance



Storm-Resistance



Snow-Protection

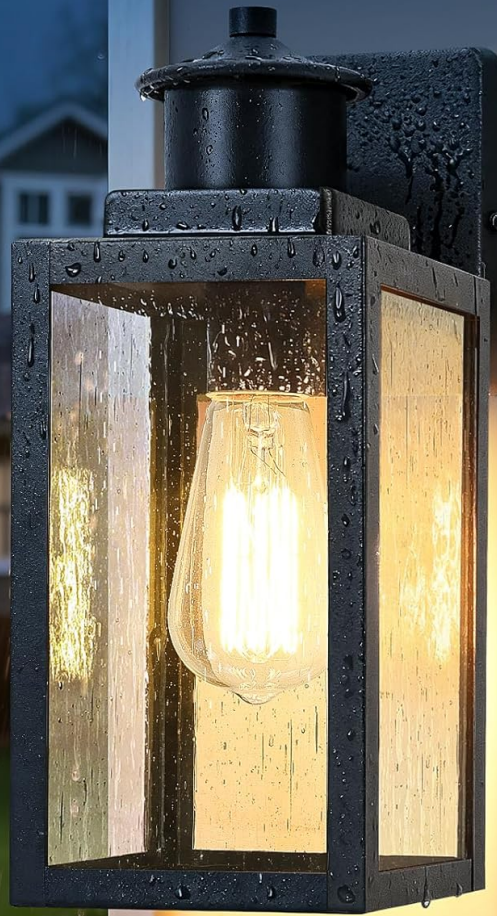


Image: The BesLowe outdoor wall light shown in a rainy outdoor setting, highlighting its waterproof, heat-resistant, storm-resistant, and snow-protection features. This illustrates the fixture's durability and suitability for all seasons.

IMPORTANT SAFETY INFORMATION

- **WARNING:** Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections.
- Use only UL/cUL listed wire connectors.
- Do not exceed the maximum wattage specified for the bulbs (100W max per bulb).
- Ensure the fixture is securely mounted to a structural element.
- Wear safety glasses and gloves during installation.
- Keep flammable materials away from the light fixture when in operation.

PACKAGE CONTENTS

Verify that all components are present before beginning installation.

- 2 x BesLowe Outdoor Wall Light Fixtures
- Mounting Hardware (mounting bracket, screws, wire nuts)
- Instruction Manual (this document)

Note: E26 base bulbs are **not included** and must be purchased separately.

Product Details



Image: Product dimensions and included components. The image displays the light fixture with measurements (11.75" H x 4.75" W x 4.75" D) and a separate view of the mounting bracket. Key specifications like color (Matte Black), material (Metal + Glass), voltage (120V AC), wattage (100W MAX), and bulb base (E26) are also listed.

SETUP & INSTALLATION

Installation of the BesLowe Outdoor Wall Lights is designed to be straightforward. However, if you are unsure about any steps, please consult a qualified electrician.

Tools Required (Not Included):

- Screwdriver (Phillips and/or Flathead)
- Wire Strippers
- Electrical Tape (optional)

- Safety Glasses
- Work Gloves

Installation Steps:

1. **Turn Off Power:** Before starting, ensure the power to the junction box is completely OFF at the circuit breaker or fuse box.
2. **Prepare Mounting Surface:** If replacing an existing fixture, carefully remove the old fixture. Ensure the junction box is clean and accessible.
3. **Attach Mounting Bracket:** Secure the provided mounting bracket to the junction box using the screws supplied with the junction box (or new screws if needed). Ensure the bracket is firmly attached.
4. **Make Electrical Connections:**
 - Connect the **black** wire from the fixture to the **black** (hot) wire from the junction box using a wire nut.
 - Connect the **white** wire from the fixture to the **white** (neutral) wire from the junction box using a wire nut.
 - Connect the **ground** wire (bare copper or green) from the fixture to the **ground** wire from the junction box and to the ground screw on the mounting bracket.
 - Ensure all wire nuts are securely tightened.
5. **Mount the Fixture:** Carefully align the fixture with the mounting bracket and secure it using the attachment screws. Ensure the fixture is flush against the wall and stable.
6. **Install Bulbs:** Insert two E26 base bulbs (not included) into the sockets. Do not exceed the maximum wattage of 100W per bulb.
7. **Restore Power:** Once the fixture is securely installed and bulbs are in place, turn the power back ON at the circuit breaker.

Your browser does not support the video tag.

Video: An official product video demonstrating the installation process for the BesLowe Outdoor Wall Lights. This video provides a visual guide to supplement the written instructions, covering electrical connections and mounting.

OPERATING INSTRUCTIONS

The BesLowe Outdoor Wall Lights are designed for simple operation once installed.

Powering On/Off:

These fixtures are controlled by a standard wall switch (push button control method) connected to your home's electrical system. Simply toggle the switch to turn the lights on or off.

Bulb Compatibility:

The fixtures require two E26 base bulbs (100W max each). They are compatible with various standard bulb types, including:

- LED bulbs
- CFL (Compact Fluorescent Lamp) bulbs
- Incandescent bulbs
- Halogen bulbs

For optimal aesthetic appeal and energy efficiency, ST58 LED Edison bulbs are recommended.



Compatible with Various E26 Base Bulbs (100W Max)

Bulbs Not Included



Image: A visual representation of different E26 base bulb types (LED, CFL, Incandescent, Halogen) that are compatible with the BesLowe outdoor wall lights. This helps users select appropriate bulbs.

MAINTENANCE

Regular maintenance will ensure the longevity and optimal performance of your BesLowe Outdoor Wall Lights.

Cleaning:

- **Disconnect Power:** Always turn off the power to the fixture at the circuit breaker before cleaning.
- **Exterior Cleaning:** Wipe the exterior of the fixture with a soft, damp cloth. Avoid using abrasive cleaners, solvents, or polishes as they may damage the finish or glass.
- **Glass Cleaning:** The seeded glass can be cleaned with a mild glass cleaner applied to a cloth, not directly to the fixture.
- **Open-Bottom Design:** The convenient open-bottom design allows for easy access to the interior for cleaning and bulb replacement.

Bulb Replacement:

- **Disconnect Power:** Turn off the power to the fixture at the circuit breaker.
- **Allow to Cool:** Allow the old bulb to cool completely before touching it.
- **Remove Old Bulb:** Carefully unscrew the old E26 base bulb from the socket.
- **Install New Bulb:** Screw in a new E26 base bulb, ensuring it does not exceed 100W.
- **Restore Power:** Turn the power back on at the circuit breaker.

TROUBLESHOOTING

If you encounter issues with your BesLowe Outdoor Wall Lights, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power to the fixture. Bulb is loose or burned out. Incorrect wiring.	Check the circuit breaker or fuse. Ensure the wall switch is ON. Tighten or replace the bulb. Verify wiring connections (refer to Installation Steps).
Light flickers or dims.	Loose bulb. Faulty bulb. Loose wiring connection.	Tighten the bulb. Replace the bulb. Check and secure wiring connections (ensure power is OFF first).
Fixture is not waterproof.	Improper installation or sealing. Damage to the fixture.	Ensure the fixture is flush against the wall and any gaskets are properly seated. Inspect for cracks or damage to the glass or frame.

PRODUCT SPECIFICATIONS

Brand	BesLowe
Model Name	B05068PB(2PK)-BK
Color	Matte Black
Material	Metal, Glass
Product Dimensions	4.75"L x 4.75"W x 11.75"H
Indoor/Outdoor Usage	Outdoor
Power Source	Hard-wired
Installation Type	Wall Mount
Special Feature	Waterproof
Control Method	Push Button (via wall switch)

Light Source Type	Incandescent, LED, CFL, Halogen
Voltage	120 Volts
Wattage (Max)	100 Watts per bulb
Bulb Base	E26
Number of Light Sources	2
Item Weight	6.63 pounds (for the pair)

WARRANTY INFORMATION

The BesLowe Outdoor Wall Lights come with an Extended Warranty. For specific details regarding the warranty period, coverage, and claims process, please refer to the warranty documentation included with your purchase or contact BesLowe customer support.

CUSTOMER SUPPORT

If you have any questions, require assistance with installation, or need to report a problem, please contact BesLowe customer support through the retailer where you purchased the product or visit the official BesLowe website for contact information.

Online Resources: For additional information and support, you may visit the [BesLowe Store on Amazon](#).