

[Manuals.plus](#) /

› [Dopesplay](#) /

› Dopesplay 15.6-inch Portable Monitor DR159 User Manual

Dopesplay DR159

Dopesplay 15.6-inch Portable Monitor with Magnetic Stand

Model: DR159

Instruction Manual

INTRODUCTION

Thank you for purchasing the Dopesplay 15.6-inch Portable Monitor. This device is designed to enhance your productivity and entertainment experience with its versatile features and high-quality display. This manual provides essential information for proper setup, operation, and maintenance of your new monitor. Please read it thoroughly before use.

KEY FEATURES

すべてのニーズに応えるモニター： 多機能設計で作業効率アップ

- 1 磁吸インターフェースで画面圧迫なし
- 2 省スペース＆高効率設置
- 3 自由自在な高さ＆角度調整
- 4 極限の軽量設計
- 5 耐久性＆長期間使用可能
- 6 目に優しいブルーライトカット技術
- 7 薄型デザイン＆携帯に便利
- 8 15.6 インチ フル HD 大画面
- 9 広視野角＆鮮明な色彩
- 10 VESA 対応で簡単設置



Image: Overview of the Dopesplay Portable Monitor highlighting its key features.

- **Innovative Magnetic Stand:** Easily attach the monitor to your laptop in seconds for an extended display. The magnetic absorption interface ensures a secure connection without screen compression.
- **360° Rotation & Flexible Adjustment:** Enjoy unparalleled flexibility with 360° rotation, vertical/horizontal switching, and adjustable tilt angles. This allows for optimal viewing in various scenarios, from programming to gaming.
- **Ultra-Thin & Lightweight Design:** Designed for portability, this monitor is slim and light, fitting easily into bags, backpacks, or suitcases. It comes with a protective sleeve for safe transport.
- **1080P Full HD IPS Display:** Experience vibrant and accurate colors from any angle with the high-resolution IPS panel. The 1920x1080 Full HD resolution at 60Hz ensures smooth visuals for work, video, and gaming.
- **Eye-Care Technology:** Features low blue light and anti-glare screen to reduce eye strain during prolonged use, making it comfortable for extended work sessions.
- **Versatile Connectivity:** Supports USB Type-C (DisplayPort Alt Mode) and Mini HDMI connections, compatible with laptops, Macs, smartphones, Switch, PS5, Xbox, and other devices.
- **Built-in Dual Speakers:** Enjoy immersive audio with integrated dual speakers, enhancing your multimedia experience.

PACKAGE CONTENTS

パッケージ内容

- ① 15.6 インチ ポータブルモニター ×1
- ② ミニ HDMI to HDMI ケーブル ×1
- ③ USB-A to USB-C ケーブル ×1
- ④ USB-C to USB-C ケーブル ×1
- ⑤ 取扱説明書 ×1
- ⑥ ポータブルスタンドパーツ ×1
- ⑦ 包装箱 ×1



Image: All components included in the product package.

Please check the package contents upon receipt to ensure all items are present:

- 1. 15.6-inch Portable Monitor x 1
- 2. Mini HDMI to HDMI Cable x 1
- 3. USB-A to USB-C Cable x 1
- 4. USB-C to USB-C Cable x 1
- 5. Instruction Manual x 1
- 6. Portable Stand Parts x 1 (Magnetic Stand)
- 7. Protective Sleeve x 1

SETUP INSTRUCTIONS

1. Attaching the Magnetic Stand

1. ダブルアームデザイン



2. 高さと角度 の自由調整



3. 安定したサポート



4. デスクス ペースの節約



5. 簡単インストール



6. 磁吸インターフェース： 画面圧迫なし



Image: Components of the magnetic stand and how it attaches to the monitor.

The monitor features a magnetic absorption stand for quick and easy setup on your laptop. Simply align the magnetic interface on the monitor with the corresponding area on the stand. For more stability, it is recommended to remove any magnetic covers during use.

If the stand's angle feels loose, use the included tool to adjust the joint screws for desired tension. The stand features a double-arm design allowing for free adjustment of height and angle, providing stable support and saving desk space. The stand base measures approximately 17.5 x 17.5 cm.

2. VESA Mount Installation (Optional)

無限の可能性 3 形態自由切り替え



Image: Various display configurations including magnetic, VESA, and built-in stand.

The monitor supports VESA mounting (75mm x 75mm). Due to its lightweight design (approx. 253g), a 2-point VESA fixation provides sufficient stability. M4 x 3mm screws are required for VESA mounting (wall mount bracket and screws are sold separately).

3. Connecting to Devices

生産性が 2 倍向上！ たった一本のケーブルで簡単に接続可能



Mac OS



Windows



Android



Linux

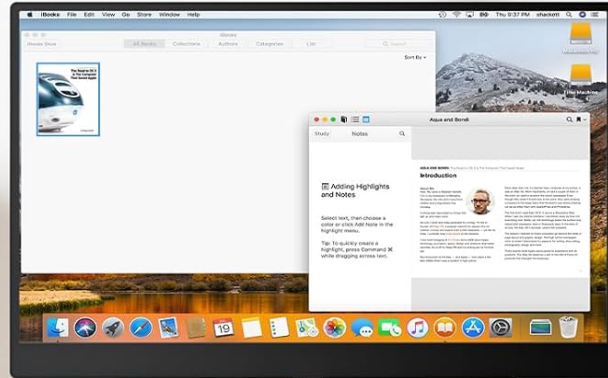


Image: Connectivity options for Mac OS, Windows, Android, and Linux devices.

- **USB Type-C Connection:** Use the provided USB-C to USB-C cable. Ensure your device's USB Type-C port supports "DP Alt Mode" for video, audio, and power transmission via a single cable.
- **Mini HDMI Connection:** Use the provided Mini HDMI to HDMI cable. When using HDMI, the monitor requires external power. Connect the USB-C cable simultaneously to a power source (e.g., your laptop's USB-C port or a power adapter) for power supply.

The monitor is compatible with a wide range of devices including laptops, Mac, smartphones, Nintendo Switch, PS5, Xbox, and PCs.

OPERATING INSTRUCTIONS

1. Power On/Off and Basic Settings

To power on the monitor, connect it to a compatible device or power source. The monitor will automatically detect the input signal. Use the control buttons on the side of the monitor to access the On-Screen Display (OSD) menu for brightness, contrast, and other settings.

The monitor's maximum brightness is 420 nits, designed for comfortable indoor use.

2. Adjusting Display Modes



Image: Different display modes: Mirror, Extend, and Vertical.

- **Extend Mode:** Extend your desktop across both screens for increased workspace.
- **Mirror Mode:** Duplicate your primary screen's content on the portable monitor.
- **Vertical Mode:** Rotate the monitor to a vertical orientation for coding, document viewing, or social media.

These modes can typically be configured through your operating system's display settings.

3. Audio Output



Image: The monitor features built-in dual speakers for immersive sound.

The monitor includes built-in dual speakers. Audio will be routed through the monitor when connected via USB-C (DP Alt Mode) or HDMI. You can adjust the volume via your connected device or the monitor's OSD menu.

MAINTENANCE

- **Cleaning:** Use a soft, lint-free cloth to clean the screen and exterior. For stubborn marks, lightly dampen the cloth with water or a screen-safe cleaner. Avoid harsh chemicals or abrasive materials.
- **Storage:** When not in use, store the monitor in its protective sleeve to prevent scratches and impacts. Keep it in a cool, dry place away from direct sunlight and extreme temperatures.

- **Handling:** Handle the monitor with care. Avoid dropping it or subjecting it to strong impacts.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No display / "No Signal" message	Incorrect cable connection; insufficient power; device not outputting signal.	• Ensure cables are securely connected. • For USB-C, confirm your device's port supports "DP Alt Mode". • For HDMI, ensure a USB-C cable is also connected for power. • Check your device's display settings to ensure external display is enabled.
Screen is too dim	Brightness setting is low; environmental lighting.	• Adjust brightness via the monitor's OSD menu. • The monitor is optimized for indoor use with a maximum brightness of 420 nits.
Stand feels loose	Joint screws are not tight enough.	• Use the included tool to tighten the joint screws on the stand.
No sound from monitor	Volume too low; incorrect audio output selected.	• Increase volume on the monitor's OSD menu and your connected device. • Ensure the monitor is selected as the audio output device in your operating system settings.

SPECIFICATIONS

Feature	Detail
Brand	Dopesplay
Model Number	DR159
Screen Size	15.6 inches
Resolution	1920 x 1080 (Full HD)
Aspect Ratio	16:9
Panel Type	IPS
Refresh Rate	60 Hz
Response Time	0.1 ms
Screen Surface	Glossy
Brightness	Max 420 nits

Feature	Detail
Connectivity	USB Type-C (DP Alt Mode), Mini HDMI
Power Input	12 Volts
Dimensions (D x W x H)	350 x 16 x 220 mm (approx.)
Weight	Approx. 253g (monitor only)

WARRANTY AND SUPPORT

Dopesplay provides a **12-month product warranty** and **lifetime technical support** for this portable monitor. We are committed to ensuring your satisfaction.

If you encounter any issues such as missing accessories, initial defects, or require assistance with settings, please do not hesitate to contact us. Our support team will respond promptly and courteously.

How to Contact Support: Please contact us directly through the Amazon message system for the fastest assistance.

ENVIRONMENTAL PROTECTION



Image: Commitment to environmental protection by not including a power adapter and promoting recycling.

In an effort to protect the environment and reduce electronic waste, this product does not include a power adapter. We encourage all users to join us in realizing a greener future by utilizing existing compatible power sources and properly recycling electronic components.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question