

Aweec AWE

Aweec GPS Wireless Dog Fence System

Model: AWE

1. INTRODUCTION

The Aweec GPS Wireless Dog Fence System provides a flexible and reliable containment solution for your dog using advanced GPS technology. This system integrates a virtual containment fence with a dog training collar, all managed through a user-friendly mobile application. It is designed to help keep your dog safely within designated boundaries while offering various training modes.

2. SAFETY INFORMATION

- Read all instructions thoroughly before using the product.
- This system is not intended for use with aggressive dogs. Consult a professional trainer if you have concerns about your dog's behavior.
- Do not leave the collar on your dog for more than 12 consecutive hours to prevent skin irritation.
- Regularly check your dog's neck for any signs of skin irritation, redness, or sores. If irritation occurs, discontinue use and consult a veterinarian.
- Ensure the collar is fitted correctly, snug enough for contact points to touch the skin but loose enough to allow two fingers to fit comfortably under the strap.
- Keep the device and charging cable out of reach of children and pets.

3. PACKAGE CONTENTS

Verify that all items are present in your package:

- Aweec GPS Wireless Dog Collar (Gray)
- USB Magnetic Charging Cable
- User Manual

4. PRODUCT OVERVIEW

The Aweec GPS Wireless Dog Fence System consists of a durable, waterproof collar equipped with advanced features:

- **Dual-Core GPS:** Enhanced signal strength and accuracy for reliable boundary detection.
- **Adjustable Collar:** Made from food-grade silicone material, adjustable from 8 to 22 inches to fit various dog sizes.
- **Magnetic Charging Port:** For convenient and secure charging.
- **IP7 Waterproof Rating:** Ensures functionality in rain, during swimming, or in muddy conditions.
- **Long-lasting Battery:** Provides up to 48 hours of continuous use on a single charge.



Image: Detailed view of the Aweec GPS Wireless Dog Collar, highlighting its features such as the magnetic charging port, adjustable strap, and dual-core GPS.

5. SETUP

5.1 Charging the Collar

Before initial use, fully charge the collar. Connect the magnetic charging cable to the collar's charging port and plug the USB end into a compatible power adapter (not included). A full charge can provide up to 48 hours of operation.

5.2 App Installation and Pairing

1. Download the free Aweec GPS Fence app from your device's app store.
2. Open the app and follow the on-screen instructions to create an account or log in.
3. Ensure your smartphone's Bluetooth and GPS are enabled.
4. Within the app, select the option to add a new device and follow the pairing process to connect your Aweec GPS collar.

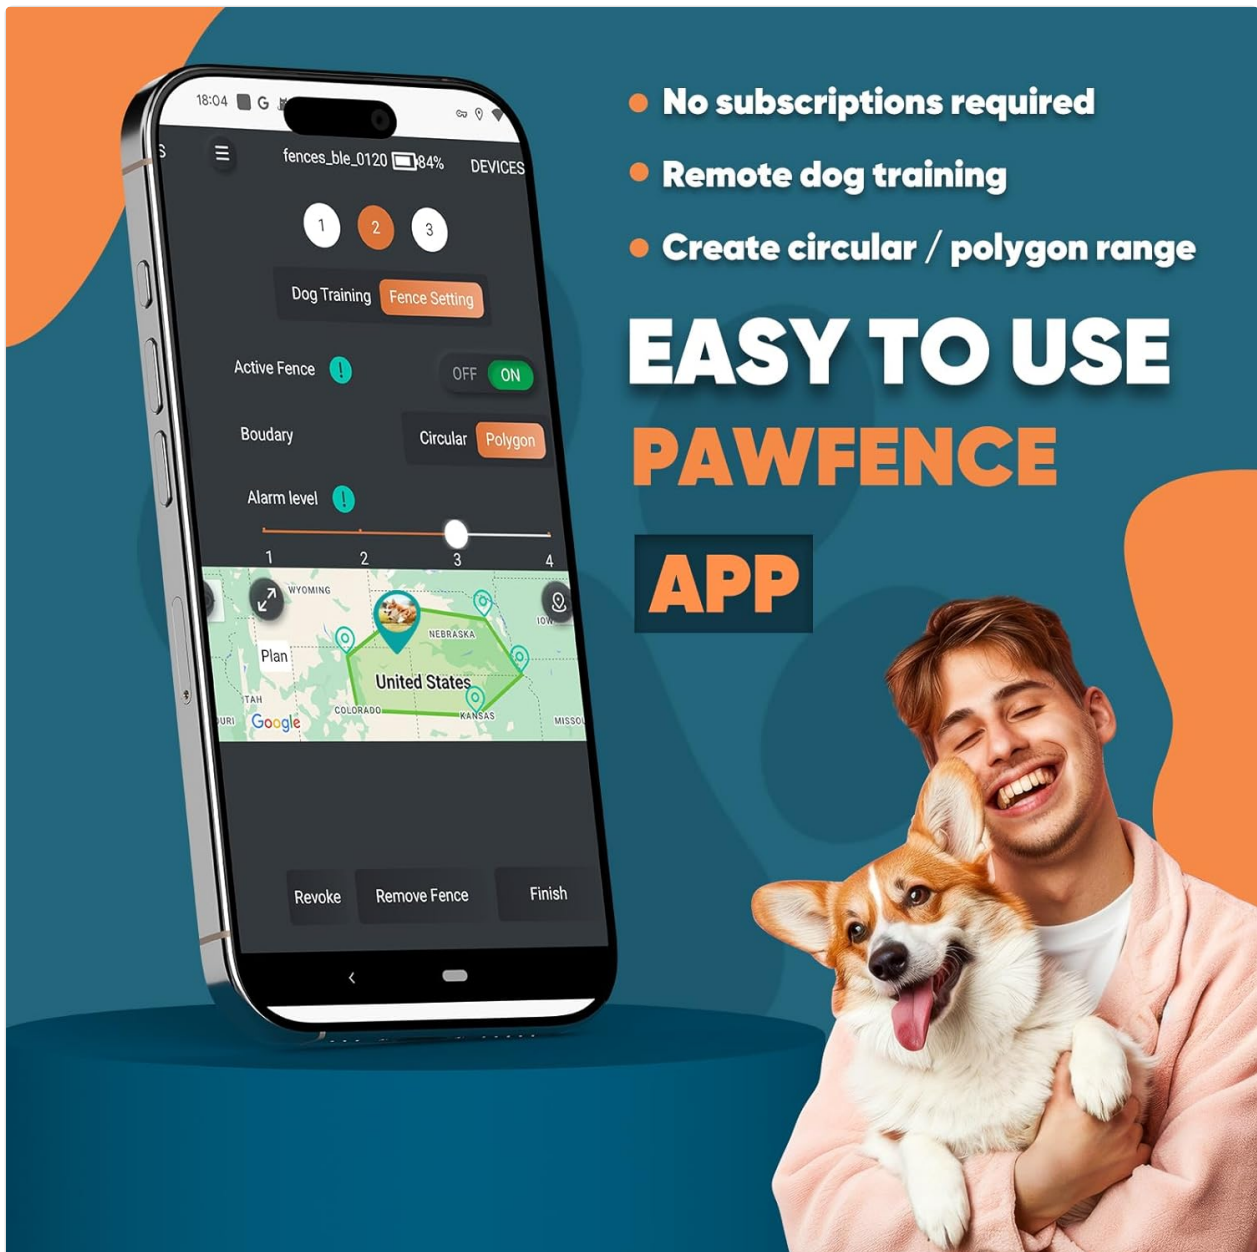
The image is a promotional graphic for the Aweec Pawfence app. On the left, a smartphone is shown at an angle, displaying the app's 'Fence Setting' screen. The screen features a progress indicator with three steps (1, 2, 3), a 'Dog Training' button, and a 'Fence Setting' button. Below these are controls for 'Active Fence' (OFF/ON), 'Boundary' (Circular/Polygon), and 'Alarm level' (a slider from 1 to 4). A map of the United States is visible, with a green polygon boundary drawn around a specific area. At the bottom of the screen are 'Revoke', 'Remove Fence', and 'Finish' buttons. To the right of the phone, three bullet points list features: 'No subscriptions required', 'Remote dog training', and 'Create circular / polygon range'. Below these is the text 'EASY TO USE PAWFENCE APP' in large, bold, white and orange letters. In the bottom right corner, a man with a beard is smiling broadly while holding a small, fluffy dog with its tongue out.

Image: A smartphone displaying the Aweec Pawfence app, showing options for dog training and fence settings, indicating ease of use.

5.3 Collar Fitting

Proper fit is crucial for the system's effectiveness and your dog's comfort:

- Place the collar around your dog's neck so that the contact points are positioned on the underside of the neck.

- Adjust the strap to be snug, allowing only two fingers to slide comfortably between the collar and your dog's neck. The collar should not be too tight or too loose.
- The adjustable silicon collar is suitable for dogs over 3 months old with neck sizes ranging from 8 to 22 inches.

6. OPERATING INSTRUCTIONS

6.1 Setting Virtual Fences

The Aweec app allows you to define safe zones for your dog:

- **Circular Fences:** Set a radius from 65 feet to 3280 feet, adjustable in 1-foot increments.
- **Polygonal Fences:** Draw custom shapes (up to hexagonal) to adapt to irregular property layouts.
- The system supports setting up virtual fences for up to 3 dogs simultaneously, each with its own collar.



Image: An aerial view demonstrating the flexibility of setting circular or polygonal GPS boundaries for a dog, with ranges from 65ft to 3280ft.

6.2 Correction Modes and Intensity

The collar offers customizable correction modes to suit your dog's temperament:

- **Light:** Visual alert.
- **Sound (Beep):** Audible warning.
- **Vibration:** Tactile alert, adjustable from 0-5 intensity levels.
- **Electric Shock:** Static correction, adjustable from 0-5 intensity levels.

You can combine these modes to create personalized training plans. Adjust intensity levels through the app based on your dog's response and adaptability.

Train your dog anytime anywhere

4 Training Mode

- Light
- Beep
- Vibration
- Shock

5 Strength Levels For Vibration & Shock

Image: A visual representation of the four available training modes (Light, Beep, Vibration, Shock) and their 5 strength levels for vibration and shock, controlled via the app.

3280ft Wireless Freedom | Dual-Core GPS Accuracy

- Super large range by GPS signal
- Customize accurate safezon by Circular or Polygon

65FT, 300FT, 3280FT

Image: Two dogs demonstrating the 'Gentle Alert' and 'Smart Correction by 4 Modes' features, showing the collar's ability to provide various alerts and corrections.

6.3 Power-Saving Mode

To conserve battery life, the device automatically enters sleep mode if your dog remains stationary for 2 minutes. It will instantly wake up upon detecting movement, ensuring continuous protection without unnecessary power consumption.

7. TRAINING YOUR DOG

Effective training is key to successful use of the Aweec GPS Wireless Dog Fence System:

- **Initial Introduction:** Allow your dog to wear the collar for short periods without activation to get accustomed to it.
- **Boundary Awareness:** When your dog approaches the set boundary line, the collar will emit an audio alarm as a gentle reminder. This helps your dog learn the safe zone limits.
- **Positive Reinforcement:** Always use positive reinforcement when your dog responds correctly to the collar's alerts or stays within the boundary.
- **Gradual Training:** Start with a smaller, clearly defined boundary and gradually expand it as your dog understands the system.
- **Consistency:** Consistent training helps cultivate good behavior habits and ensures your dog respects the virtual fence.



Image: A dog running freely within a virtual fence, with a person controlling the settings via a smartphone app, illustrating the 2-in-1 functionality of containment and training.

8. MAINTENANCE

- **Cleaning:** The collar is IP7 waterproof, allowing it to be cleaned with water. Use a soft cloth to wipe down the collar and contact points regularly to remove dirt and debris. Ensure the charging port is dry before charging.
- **Battery Care:** Recharge the collar regularly to maintain optimal battery performance. Avoid fully depleting the battery frequently.
- **Storage:** When not in use for extended periods, store the collar in a cool, dry place.

Product Details



Image: A dog swimming in a pool, wearing the Aweec collar, demonstrating its IPX7 waterproof capability.

9. TROUBLESHOOTING

If you encounter issues with your Aweec GPS Wireless Dog Fence System, refer to the following common solutions:

Problem	Possible Cause	Solution
Collar not connecting to app	Bluetooth/GPS off, collar uncharged, app issue	Ensure Bluetooth and GPS are enabled on your phone. Check collar battery level. Restart the app and collar. Re-pair the device if necessary.
Fence not working correctly (no alerts)	Incorrect boundary settings, poor GPS signal, collar not active	Verify boundary settings in the app. Ensure the collar has a clear view of the sky for GPS signal. Check if the fence is activated in the app.

Problem	Possible Cause	Solution
Collar not holding a charge	Charging cable issue, dirty charging port, battery degradation	Ensure the magnetic charging cable is properly connected. Clean the charging port. If the issue persists, contact support.
Inaccurate GPS tracking	Environmental interference, weak GPS signal	Ensure the dog is in an open area with minimal obstructions (e.g., dense trees, tall buildings). Allow the collar time to acquire a strong GPS signal.

10. SPECIFICATIONS

- **Model Number:** AWE
- **Item Weight:** 12.3 ounces
- **Collar Material:** Food-grade silicone
- **Adjustable Collar Size:** 8 - 22 inches
- **Battery:** 1 Lithium Ion battery (included)
- **Battery Life:** Up to 48 hours (continuous use)
- **Waterproof Rating:** IP7
- **Boundary Radius:** 65 feet to 3280 feet (adjustable in 1-foot increments)
- **Correction Modes:** Light, Sound (Beep), Vibration (0-5 levels), Electric Shock (0-5 levels)
- **Multi-Dog Support:** Up to 3 dogs simultaneously
- **App Compatibility:** Lifetime free app

11. WARRANTY AND SUPPORT

The Aweec GPS Wireless Dog Fence System comes with a lifetime free mobile application, ensuring continuous access to its features without subscription fees. For product support, technical assistance, or warranty inquiries, please refer to the contact information provided with your purchase or within the mobile application's help section. Our expert support team is available to assist you.