



[Manuals.plus](#) /

> [WORKPRO](#) /

> WORKPRO 96x24" Heavy-Duty Adjustable Workbench Instruction Manual

## WORKPRO W082191AE

# WORKPRO 96x24" Heavy-Duty Adjustable Workbench Instruction Manual

Model: W082191AE

## INTRODUCTION

This manual provides detailed instructions for the assembly, operation, maintenance, and troubleshooting of your WORKPRO 96x24" Heavy-Duty Adjustable Workbench. Please read this manual thoroughly before use to ensure safe and efficient operation and to maximize the lifespan of your workbench.

The WORKPRO workbench is designed for demanding tasks in garages and workshops, featuring a robust construction and versatile functionalities.

## SAFETY INFORMATION

Always follow basic safety precautions when using this workbench to reduce the risk of injury or damage. Keep the work area clean and well-lit. Ensure the workbench is placed on a stable, level surface before use. Do not exceed the maximum load capacity of 4000 lbs.

- Ensure all fasteners are securely tightened before use.
- Do not stand or climb on the workbench.
- Distribute weight evenly across the workbench surface.
- Keep children and unauthorized persons away from the workbench during use.
- Disconnect power from the integrated power outlet when not in use or during maintenance.

## COMPONENTS LIST

Before assembly, verify that all components are present and undamaged. If any parts are missing or damaged, contact customer service.

Component	Quantity	Description
-----------	----------	-------------

Component	Quantity	Description
Rubber Wood Top	1	96"x24" work surface, 1.2 inches thick.
Leg Assemblies	4	Industrial-grade Q195 square tubes with SPCC panels.
Leveling Feet	4	Adjustable feet for stability on uneven floors.
Power Strip	1	ETL/FCC-certified with 4 AC outlets, 1 USB, 1 Type-C port, 5FT cord.
Pegboard	1	Side-mounted for tool organization.
Pegboard Hooks	20	10 long (3.9 in) and 10 short (2.2 in) hooks.
Assembly Hardware	1 set	Screws, bolts, and any necessary tools for assembly.

## SETUP AND ASSEMBLY

---

Assembly typically takes 15 minutes with clear instructions. It is recommended to have a Phillips screwdriver or electric drill with a screwdriver attachment, and a small drill for pilot holes, as some users have noted that pilot holes may not be pre-drilled for all screws.

### Assembly Steps:

- 1. Attach the Legs:** Secure the leg assemblies to the workbench top using the provided hardware. Ensure the dual-screw fastening points are aligned.

# 6 ADJUSTABLE HEIGHTS

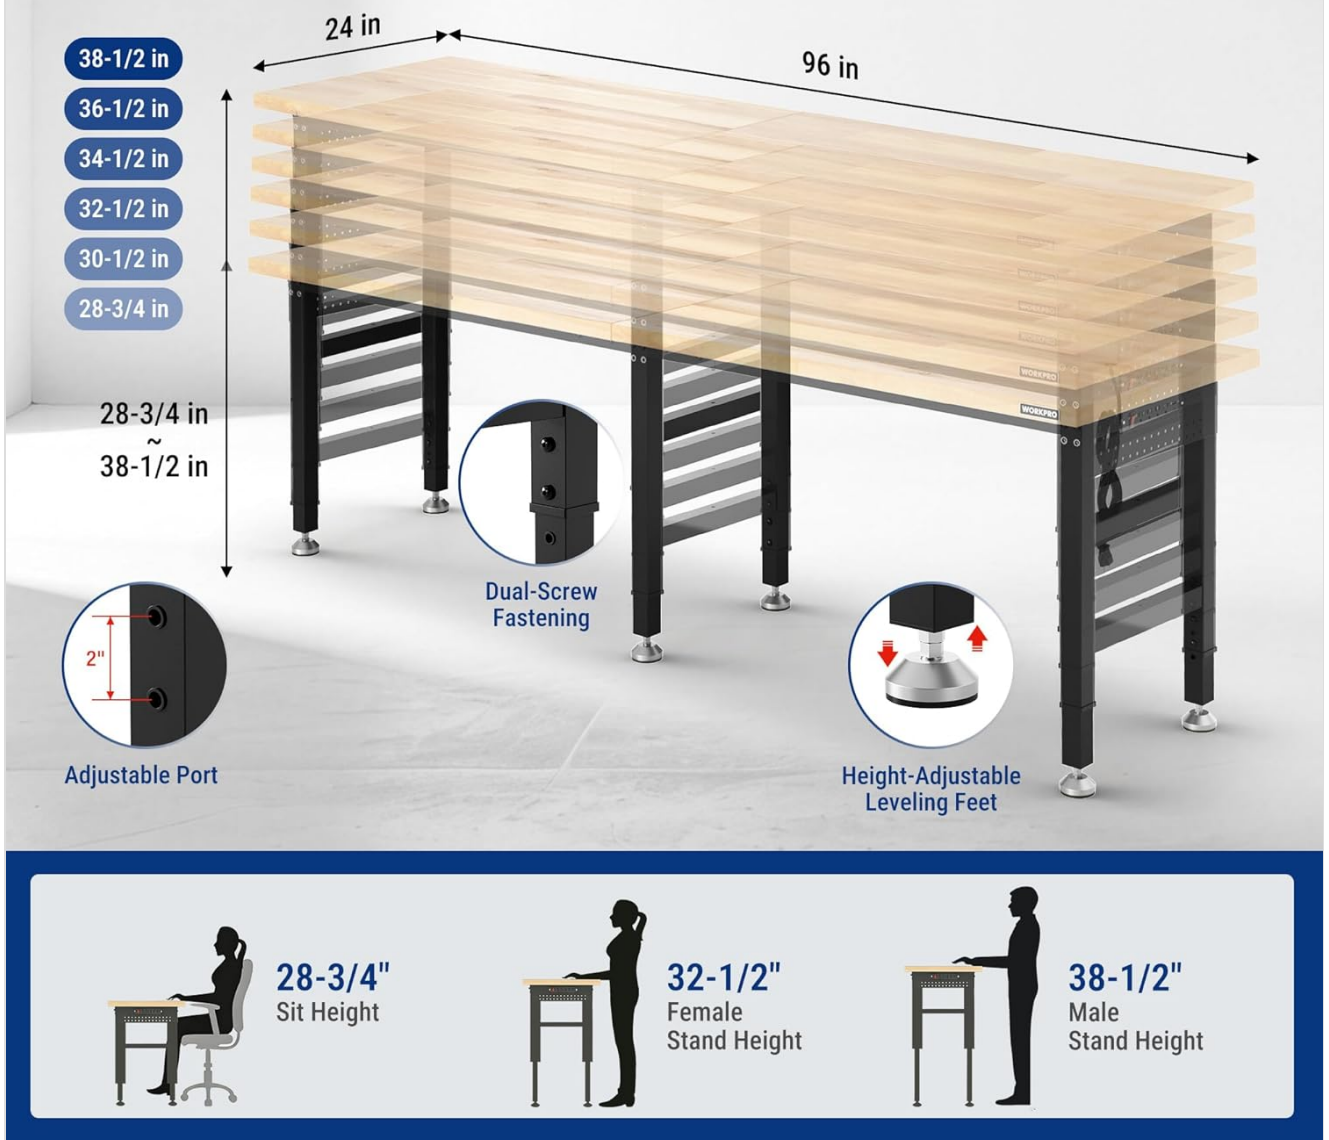


Figure 1: Attaching the workbench legs to the tabletop. Note the dual-screw fastening for stability.

2. **Secure the Bezel:** Attach any bezels or support beams as indicated in the instructions to reinforce the structure.

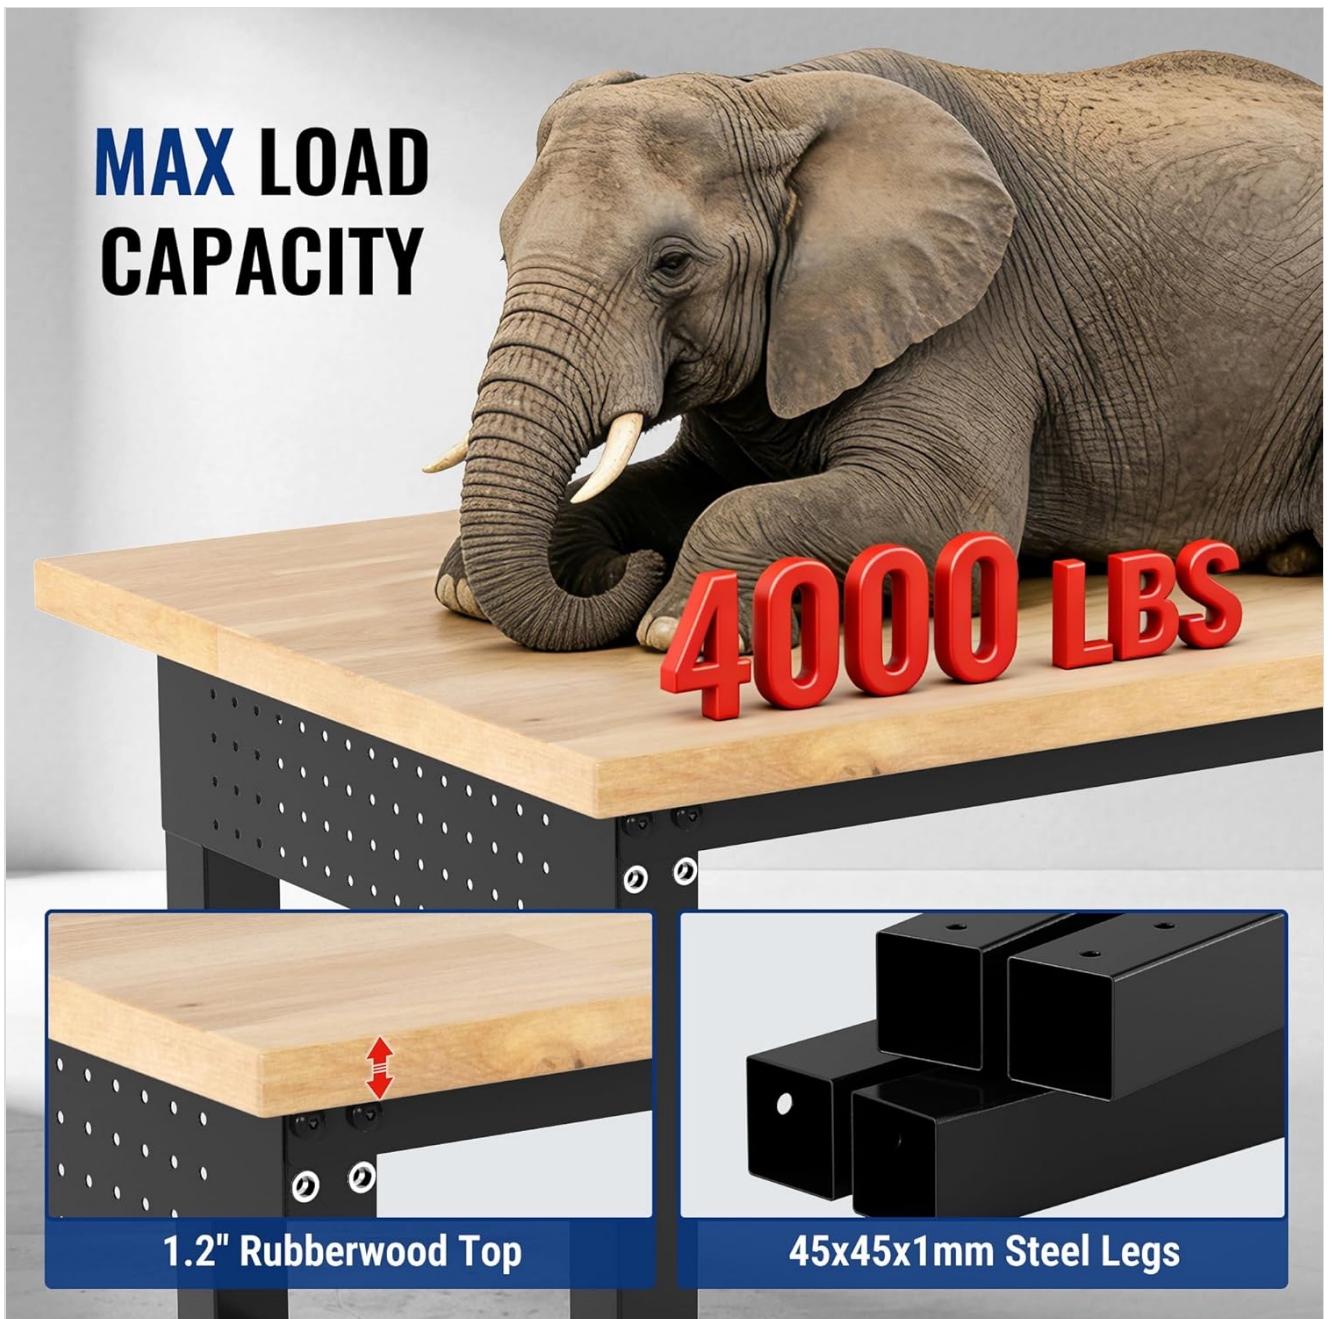


Figure 2: Securing the bezel to the workbench frame for added structural integrity.

- Adjust the Height:** The workbench offers 6 adjustable heights from 28-3/4" to 38-1/2". Adjust each leg to your desired height setting (indicated by pre-drilled holes) and secure with the provided fasteners.



Figure 3: Diagram showing the six adjustable height options for the workbench, ranging from 28-3/4 inches to 38-1/2 inches.

4. **Connect the Leveling Feet:** Screw the height-adjustable leveling feet into the bottom of each leg. Adjust them to compensate for uneven floors and ensure the workbench is perfectly level and stable.

# HEAVY-GAUGE STEEL BRACING FOR SUPERIOR STABILITY



Stable H-Shaped Legs



Reinforced Support Sleeve



Height-Adjustable Leveling Feet

Figure 4: Installation and adjustment of the height-adjustable leveling feet to ensure workbench stability.

5. **Install Pegboard and Hooks:** Attach the side-mounted pegboard. Insert the 10 long (3.9 in) and 10 short (2.2 in) hooks into the pegboard holes to organize your tools.

# DOUBLE-SIDED PEGBOARD WITH 20 HOOKS

Neat Storage, Easy Reach



Figure 5: The double-sided pegboard with various tools hung on the included hooks, demonstrating organized storage.

6. **Connect Power Outlet:** Ensure the ETL-certified power strip is securely integrated into the workbench. Plug the 5FT power cord into a suitable wall outlet.

# MULTI-FUNCTIONAL POWER OUTLET-ETL CERTIFIED



Figure 6: Close-up of the multi-functional power outlet, featuring 4 AC outlets, 1 USB port, and 1 Type-C port.

Your browser does not support the video tag.

Video 1: Official WORKPRO video demonstrating the assembly process of the adjustable workbench.


## OPERATING INSTRUCTIONS

---


### Adjusting Workbench Height:

To adjust the height, loosen the fasteners on each leg, slide the inner leg section to the desired height setting (indicated by pre-drilled holes), and re-tighten the fasteners securely. Ensure all legs are set to the same height for a level work surface. The workbench can be adjusted for sitting (28-3/4") or standing (up to 38-1/2") use.


# 4-STEP EASY GUIDE

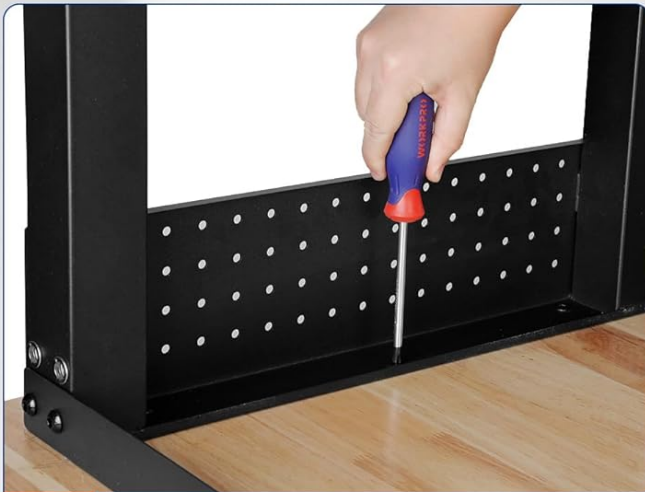

**1** Attach the Legs

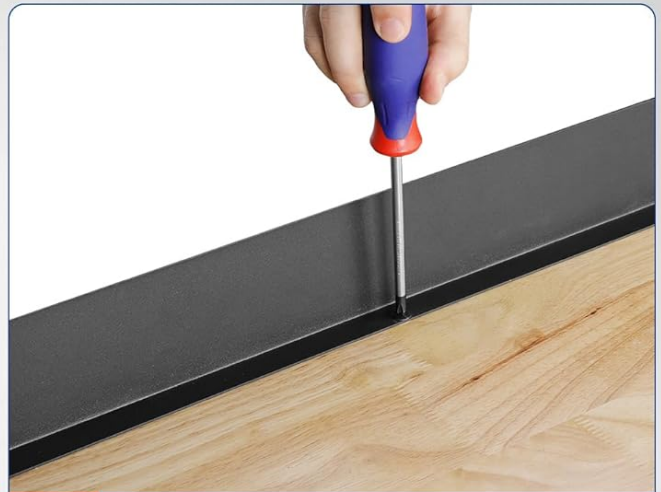

**2** Secure the Bezel

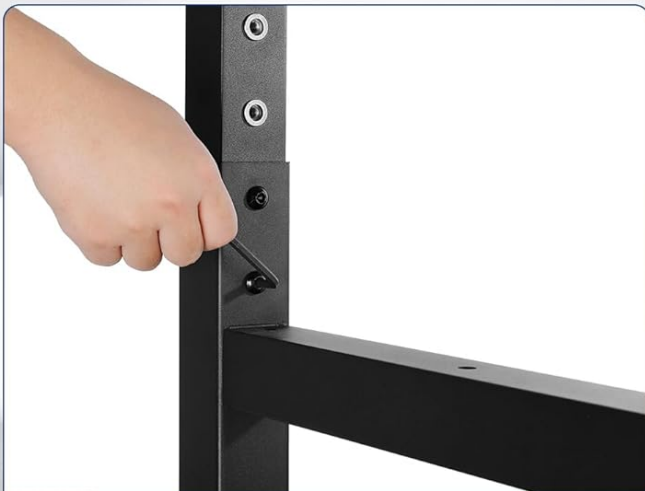

**3** Adjust the Height



**4** Connect the Leveling Feet

Figure 7: The workbench demonstrating its adjustable height feature, suitable for both seated and standing work positions.

## Using the Power Outlet:

The integrated power strip provides convenient access to power for your tools and devices. It includes 4 AC outlets, 1 USB port, and 1 Type-C port. Plug the workbench's main power cord into a grounded wall outlet. Use the power strip's on/off switch to control power to the outlets. Always ensure tools and devices are within the power strip's electrical limits.

## Utilizing the Pegboard:

The side-mounted pegboard and included hooks allow for organized storage of frequently used tools and accessories, keeping your workspace tidy and efficient.

## MAINTENANCE

- **Cleaning:** Wipe the rubber wood top with a damp cloth and mild detergent. Avoid harsh chemicals that may damage the wood finish. Clean the metal frame with a damp cloth.

- **Fastener Check:** Periodically check all screws and bolts for tightness. Re-tighten as necessary to maintain stability and safety.
- **Wood Top Care:** The 1.2-inch thick solid rubber wood top is durable. To prolong its life and appearance, consider applying a wood conditioner or sealant periodically, especially if exposed to moisture or heavy use.
- **Electrical Safety:** Inspect the power cord and power strip for any signs of damage. Do not use if damaged.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Workbench is unstable or wobbles.	Uneven floor; loose fasteners; legs not adjusted to the same height.	Adjust the leveling feet until stable. Ensure all fasteners are tight. Verify all legs are set to the same height.
Power outlets are not working.	Power strip switch is off; not plugged into wall outlet; circuit breaker tripped.	Ensure the power strip switch is ON. Check if the workbench is plugged into a live wall outlet. Reset the circuit breaker if necessary.
Difficulty adjusting height.	Fasteners are too tight; debris in adjustment holes.	Loosen fasteners completely before attempting to adjust. Clear any obstructions from the adjustment holes.

## SPECIFICATIONS

- **Model:** W082191AE
- **Dimensions (L x W):** 96 inches x 24 inches
- **Adjustable Height Range:** 28-3/4 inches to 38-1/2 inches
- **Load Capacity:** 4000 lbs
- **Tabletop Material:** 1.2-inch thick Solid Rubber Wood
- **Frame Material:** Industrial-grade Q195 Square Tubes, SPCC Panels (Metal)
- **Power Outlet:** ETL/FCC-certified, 4 AC outlets, 1 USB port, 1 Type-C port, 5FT power cord
- **Pegboard:** Side-mounted, includes 20 hooks (10 long, 10 short)
- **Leveling:** Height-adjustable leveling feet
- **Assembly Required:** Yes
- **Brand:** WORKPRO
- **Manufacturer:** HANGZHOU GREATSTAR INDUSTRIAL CO.,LTD
- **GTIN/UPC:** 820909628316

## WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the documentation included with your purchase or contact WORKPRO customer service directly. Our expert customer service team is available to assist with any issues related to your workbench.

Contact information can typically be found on the manufacturer's website or on the product packaging.



