Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Kestanlora qc-ke01113

Kestanlora Wireless WiFi Indoor Security Camera

Model: qc-ke01113 - User Manual

1. Introduction

Thank you for choosing the Kestanlora Wireless WiFi Indoor Security Camera. This device is designed to provide discreet surveillance and convenient power access, integrating a 1080P HD camera with a multi-functional wall charger. It features motion detection, silent video-only recording, and remote viewing capabilities, ensuring the safety of your home or office.

Please read this manual thoroughly before operating the device to ensure proper use and to maximize its features.

2. Package Contents

- Kestanlora Wireless WiFi Indoor Security Camera (Model qc-ke01113)
- User Manual

3. Product Overview

The Kestanlora security camera is ingeniously designed as a 4-in-1 wall charger, offering both surveillance and power solutions. It includes:

- **Full HD 1080P Camera:** Provides clear, high-resolution video with a 140-degree ultra-wide-angle lens.
- **Motion Detection:** Advanced sensor detects movement and sends instant alerts to your mobile device.
- **Silent Video-Only Recording:** Records video without audio, ensuring privacy.
- **4 AC Outlets:** (120V, 15A, 1200W) for standard electrical devices.
- **3 USB PD Fast Charging Ports:** (3.4A, 20W) for rapid charging of compatible devices.
- **1700 Joule Surge Protector:** Protects connected electronics from power surges.



Figure 1: Front view of the Kestanlora Wireless WiFi Indoor Security Camera, showcasing its integrated design as a wall charger with multiple outlets and USB ports.

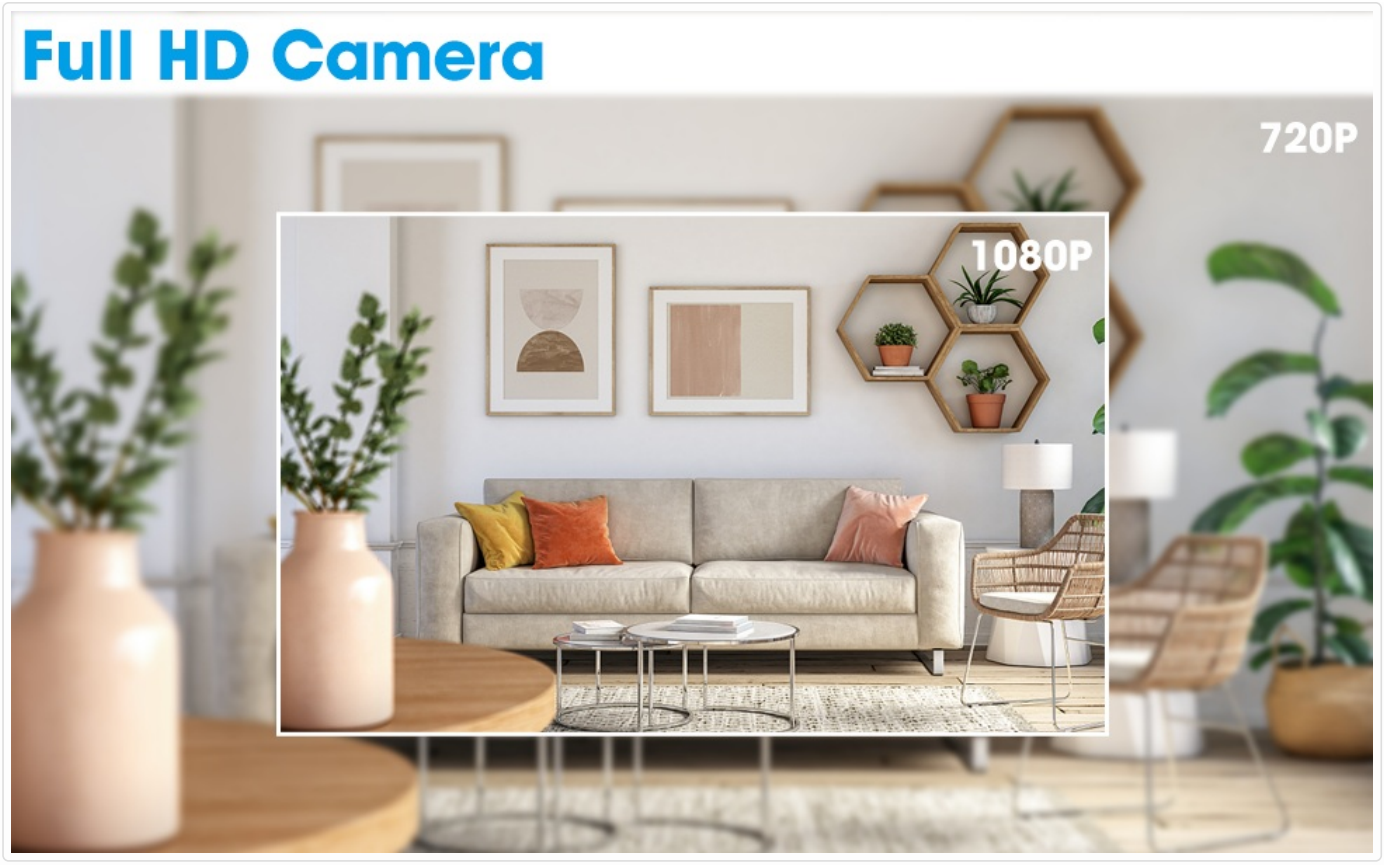


Figure 2: The Kestanlora camera functioning as a fast charger, depicted in a bedroom environment, highlighting its dual utility.

4. Setup

4.1 Initial Power-Up

1. Plug the Kestanlora camera into a standard wall outlet. Ensure it is securely seated.
2. The device will power on automatically.

4.2 App Installation and Wi-Fi Connection

1. Download the companion application (e.g., "LOOK CAM" as indicated in product imagery) from your mobile device's app store.
2. Open the app and follow the on-screen instructions to create an account and add your new device.
3. Connect the camera to your 2.4GHz Wi-Fi network. Ensure your mobile device is also connected to the same network during setup.

4.3 Micro SD Card Installation (Optional)

For local video storage, insert a Micro SD card (up to 128GB, not included) into the designated slot on the device. Ensure the card is inserted correctly. The camera supports H.265 technology for efficient storage.

5. Operating Instructions

5.1 Live Streaming

Once connected to Wi-Fi, open the app on your mobile device to view live 1080P HD video from the camera. This allows real-time monitoring of your property.



Figure 3: Visual comparison demonstrating the superior clarity of 1080P HD video provided by the camera compared to 720P.

5.2 Motion Detection and Alerts

The camera features an advanced motion sensor. When movement is detected, the camera can automatically begin video recording and send instant alerts to your phone.

- **Adjust Sensitivity:** Within the app settings, you can adjust the motion detection sensitivity to suit your environment and reduce false alarms.
- **Alert Notifications:** Ensure app notifications are enabled on your mobile device to receive timely alerts.



Figure 4: An illustration of the motion detection feature, showing an intruder being detected and an alert notification appearing on a mobile device.

5.3 Recording Modes

- **Continuous Recording:** If an SD card is inserted, the camera can record continuously.
- **Motion-Activated Recording:** Records only when motion is detected, saving storage space.
- **24/7 Loop Recording:** When the SD card memory is full, the camera will automatically overwrite the oldest files to continue recording. This setting can be configured in the app.

5.4 Cloud Storage (Optional)

The camera supports cloud video recording services for 7 or 30 days. Please note that cloud services typically incur a subscription fee, while other application features are free.

5.5 Remote Viewing

Connect the camera to Wi-Fi to enable remote real-time viewing from anywhere using your mobile device. This allows you to check on your home or office security situation at any time.



Figure 5: A user remotely monitoring their home activity via the camera's live feed on a smartphone.

5.6 Using the Power Outlets and USB Ports

The integrated 4 AC outlets and 3 USB PD fast charging ports can be used simultaneously with the camera's surveillance functions. Simply plug in your devices as you would with a standard power strip.

6. Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Do not use liquid cleaners or aerosols.
- **SD Card Management:** Periodically check the SD card status in the app. Format the card if necessary to maintain optimal recording performance.

7. Troubleshooting

- **Camera Not Connecting to Wi-Fi:**
  - Ensure your Wi-Fi network is 2.4GHz. The camera does not support 5GHz networks.
  - Check that the Wi-Fi password entered in the app is correct.
  - Move the camera closer to your Wi-Fi router to improve signal strength.
  - Restart your router and the camera.
- **No Video Recording:**
  - Verify that a Micro SD card is properly inserted and formatted.

- Check recording settings in the app (e.g., continuous recording, motion-activated recording).
- Ensure the SD card is not full. If loop recording is enabled, older files should be overwritten.

- **Motion Detection Not Working / Too Sensitive:**
  - Adjust the motion detection sensitivity settings in the app.
  - Ensure the camera's view is clear and not obstructed.
  - Check that motion alerts are enabled in the app and on your phone's notification settings.
- **Device Not Powering On:**
  - Ensure the wall outlet is functional by plugging in another device.
  - Check for any visible damage to the device.

8. Specifications

Feature	Specification
Model Number	qc-ke01113
Video Resolution	1080P Full HD
Viewing Angle	140-degree Ultra-Wide Angle
Recording Type	Video-Only (No Audio)
Storage	Micro SD Card (up to 128GB), Cloud Storage (subscription required)
Wi-Fi Connectivity	2.4GHz only
AC Outlets	4 (120V, 15A, 1200W)
USB Charging Ports	3 (3.4A, 20W PD Fast Charging)
Surge Protection	1700 Joules
Product Dimensions	4.1 x 3.1 x 2.1 inches
Item Weight	8.4 ounces
Smart Home Compatibility	Smart Home Compatible

9. Safety Information

- **Electrical Safety:** Do not use this device with high-power appliances such as electric kettles, heaters, or microwaves, as this may exceed the rated wattage (1200W) and cause damage or fire.
- **Video-Only Device:** This device is for video recording only. It does not contain a microphone and cannot capture, transmit, or store any audio signals.

- **Indoor Use Only:** This product is designed for indoor use only. Do not expose it to water, moisture, or extreme temperatures.
- **Children and Pets:** Keep the device out of reach of children and pets to prevent accidental damage or injury.

10. Warranty and Support

For warranty information or technical support, please refer to the contact details provided on the product packaging or visit the official Kestanlora website. Please have your model number (qc-ke01113) and purchase details ready when contacting support.

© 2025 Kestanlora. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0G257SSG8

More documents and user manuals: **https://manuals.plus/**