

[Manuals.plus](#) /

› [VAULTEK](#) /

› VAULTEK NV10i 10 Series Sub-Compact Biometric Smart Safe User Manual

VAULTEK NV10i

VAULTEK NV10i 10 Series Sub-Compact Biometric Smart Safe User Manual

Model: NV10i

INTRODUCTION

This manual provides essential information for the safe and efficient operation of your VAULTEK NV10i 10 Series Sub-Compact Biometric Smart Safe. Please read all instructions carefully before use and retain this manual for future reference.

IMPORTANT SAFETY INFORMATION

- Always keep backup keys in a secure location away from the safe.
- Do not store the safe keys or master code inside the safe.
- Ensure the safe is securely mounted to prevent unauthorized removal.
- Keep fingers clear of the lid when closing to avoid pinching.
- This safe is designed to protect valuables and firearms. Always follow local laws and regulations regarding firearm storage.

WHAT'S INCLUDED

Your VAULTEK NV10i safe package includes the following items:

- VAULTEK NV10i Safe
- (2) Manual Keys
- AC Power Adapter
- Interior Foam Padding
- 4 Ft. Steel Security Cable
- Mounting Hardware



Image showing the included accessories: two manual keys, an AC power adapter, a steel security cable, and mounting hardware.

INITIAL SETUP

Powering Your Safe

The NV10i safe can be powered via the included AC power adapter or with three (3) AAA alkaline batteries (not included) for backup power.

- **AC Power:** Connect the AC power adapter to the safe's power port and plug it into a wall outlet.
- **Backup Batteries:** Install three AAA alkaline batteries into the battery compartment. These provide power for up to 3 months.



Image showing the AC power adapter cable, used to power the safe.

Programming Access Methods

Biometric Fingerprint Scanner

The high-resolution biometric scanner can store up to 80 unique fingerprints.

1. Open the safe using a manual key or the default code.
2. Locate the 'PROGRAM' button inside the safe.
3. Press and release the 'PROGRAM' button. The biometric scanner will illuminate.
4. Place your finger firmly on the scanner. Lift and repeat several times until the safe confirms successful enrollment.



Close-up view of the biometric fingerprint scanner on the safe, used for quick access.

Smart Sense Keypad

The backlit Smart Sense keypad allows for a 4 to 8 digit master code.

1. Open the safe.
2. Press and hold the 'PROGRAM' button until the keypad illuminates.
3. Enter your desired 4 to 8 digit master code.
4. Press and hold the 'PROGRAM' button again to save the code.



Manual Key Access

(2) Backup keys included.




Backlit Smart Sense™ Keypad

Capacitive touch sensitive rapid fire backlit LED keypad.


Secure Authorized Entry

Multiple secure access points, including biometric scanner for quick access.

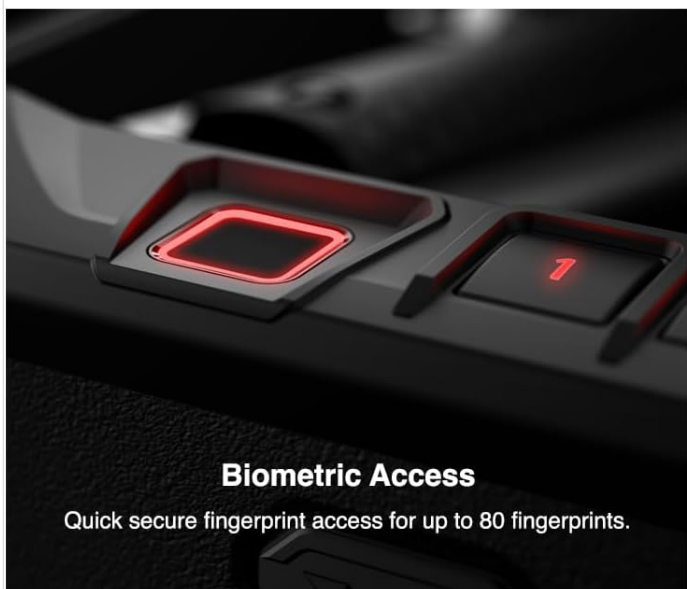

Biometric Access

Quick secure fingerprint access for up to 80 fingerprints.

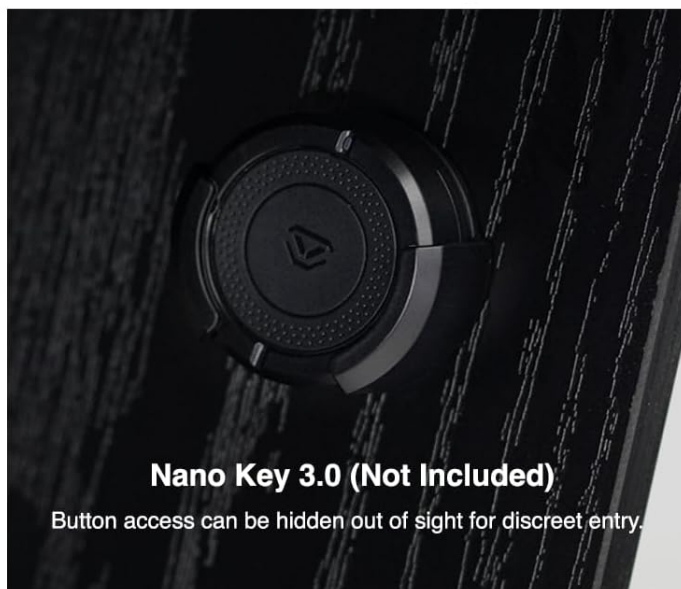

Nano Key 3.0 (Not Included)

Button access can be hidden out of sight for discreet entry.

Close-up view of the backlit Smart Sense keypad with numbered buttons.

ViSN (VAULTEK Intelligent Safe Network) App Setup

The ViSN platform uses WiFi enabled cloud technology for remote management and live alerts. Download the exclusive iOS/Android smartphone app for guided setup and real-time monitoring.

1. Download the VAULTEK ViSN app from your device's app store. [Download App](#)
2. Follow the in-app instructions to connect your NV10i safe to your WiFi network.
3. Register your safe and configure alert preferences.

What's Included

Everything you need plus ViSN Technology.



Manual Keys



Power Cable




Steel Security Cable



Mounting Hardware



Vaultek Customer Support

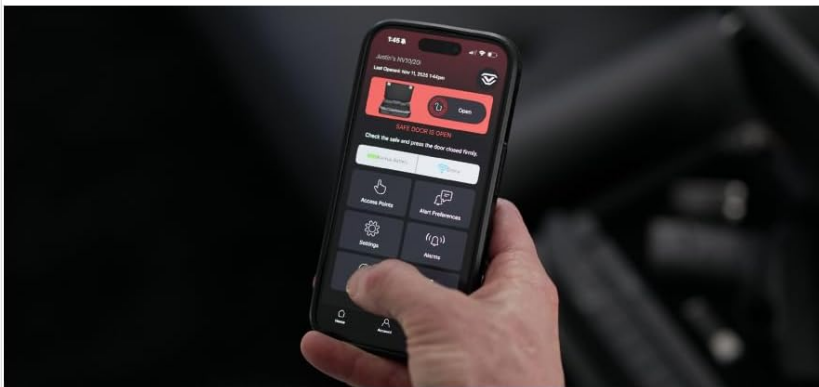

**ViSN Technology
Smartphone App**

[Free Download](#)



A smartphone displaying the VAULTEK ViSN app interface for safe monitoring.

Mounting Your Safe

The safe can be mounted to a nightstand, desk, or vehicle using the pre-drilled holes and included hardware or steel security cable.

1. Choose a secure location for mounting.
2. Use the pre-drilled holes on the safe as a template to mark drilling locations.
3. Secure the safe using the provided mounting hardware.
4. Alternatively, use the 4 ft. steel security cable to tether the safe to a fixed object.

Rugged Quick Access Safe

Modern design and sleek profile looks right at home in the open or tucked away.



Fits handguns up to 9.875" in overall length and 5.375" in overall height.

The VAULTEK NV10i safe securely mounted to a surface, demonstrating its compact profile.

OPERATING YOUR SAFE

Quick Access Methods

Biometric Access

Place your enrolled finger firmly on the biometric scanner. The safe will unlock and the lid will automatically open.

Keypad Access

Enter your programmed 4 to 8 digit master code on the Smart Sense keypad. The safe will unlock and the lid will automatically open.

Manual Key Access

Insert one of the provided manual keys into the keyhole and turn to unlock the safe. The lid will then open.

A black, rugged-looking handgun case is open, revealing a black handgun inside. The case has a textured exterior and a smooth interior. The handgun is positioned horizontally, with its grip facing the viewer. The case is set against a light, out-of-focus background.

Fitment

Handguns up to 9.875" in overall length.

Max Handgun Length: 9.875" | Interior Dimensions: 9.875" L x 5.375" W x 1.5" H

A hand inserting a manual key into the safe's keyhole for backup access.

Nano Key 3.0 (Optional)

If you have purchased the optional Nano Key 3.0, it provides the fastest entry method. Once activated within range of your safe, the safe will open automatically.



A close-up of the Nano Key 3.0, an optional accessory for rapid, discreet access.

Interior LED Lighting

The safe features responsive LED lighting in low-light situations. The LED backlit keypad's proximity sensor helps locate the safe, and interior LED lights illuminate the contents upon opening.



Premium Entry Methods

[Smart Key Nano 3.0 Sold Separately](#)

Premium Entry Methods: Biometric Scanner, Numeric Keypad, Backup Keys, + our signature Vaultek Smart Key Nano 3.0.



Backlit LED Keypad

Proximity sensor auto-illuminates keys so you can access your safe even in low light.



Visibility Matters

The interior LED light allows you to see your safe in low light situations.



Dual Anti-Impact Latches

Drop tested for the ultimate in rugged performance. Helping keep your items secure.




Rugged Unibody Enclosure

Vaultek's signature metal forming techniques create a strong and reliable safe you can trust.




Anti-Pry Reinforcement

Formed steel body uses Vaultek's signature metal forming techniques with anti-pry design features.

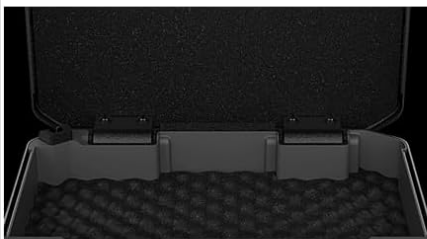

Interior Mounted Hinges

Tuned interior mounted hinges automatically open the safe lid when unlocked.

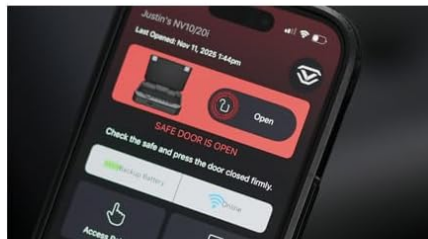

ViSN™ App

Stay connected and informed at all times with Vaultek's Intelligent Safe Network.



Patented Lock System

Ruggedized latch system is designed to protect and stay locked under heavy impact.

The interior of the open safe, showing a handgun and the illuminated LED light for visibility.

ViSN Live Alerts and Monitoring

Through the ViSN smartphone app, you can receive live alerts for safe activity, such as tampering attempts, low battery, or unauthorized access. Monitor your safe's status from anywhere.

Your browser does not support the video tag.

Video demonstrating the various secure access points for VAULTEK 10 and 20 Series safes, including biometric, keypad, manual key, and Nano Key 3.0 options.

MAINTENANCE

- **Battery Replacement:** Replace AAA alkaline batteries every 3-6 months or when the low battery indicator appears.
- **Cleaning:** Wipe the exterior with a soft, damp cloth. Avoid abrasive cleaners. Clean the biometric sensor gently with a dry, lint-free cloth.

- **Keypad:** Keep the keypad free from dirt and debris for optimal performance.

TROUBLESHOOTING

Problem	Solution
Safe not opening with fingerprint.	Ensure your finger is clean and dry. Re-enroll your fingerprint if issues persist. Try using a different enrolled finger or another access method.
Keypad not responding.	Check battery levels. Ensure the keypad is clean. Try pressing the 'PROGRAM' button to wake it up.
Safe not connecting to ViSN app.	Verify your WiFi connection. Ensure the safe is within range of your router. Restart the app and safe.
Lid not opening automatically.	Check for any obstructions. Ensure the safe is on a level surface. Verify power source (AC adapter or fresh batteries).

SPECIFICATIONS

Feature	Detail
Brand	VAULTEK
Model Number	NV10i
Product Dimensions	8.5"D x 10.5"W x 2.13"H
Chamber Depth	8.5 Inches
Material	Carbon Steel
Lock Type	Backlit Keypad, Biometric, Key, Patented Dual Anti-Impact Latch System
Biometric Capacity	Up to 80 unique fingerprints
Special Features	Backlit LED Smart Sense™ Capacitive Keypad, Biometric Access, Patented Dual Anti-Impact Latch System, Precision Engineered Metal Forming + Unibody Housing Design, ViSN™ Vaultek Intelligent Safe Network
Mounting Type	Mountable with pre-drilled holes and hardware along with the included steel security cable.
Power Source	AC Power Adapter, 3 AAA Alkaline Batteries (Not Included)
Handgun Fitment	Up to 9.875" in overall length and 5.375" in overall height.



Modern Design. Precision Engineered.
Unmatched fit and finish.

Max Handgun Length: 9.875" | Interior Dimensions: 9.875" L x 5.375" W x 1.5" H

Image illustrating the internal dimensions and maximum handgun length capacity of the safe.

WARRANTY AND SUPPORT

VAULTEK products are known for their quality and reliability. Your NV10i safe comes with VAULTEK's 5-star support. For warranty information, technical assistance, or customer service, please visit the official VAULTEK website or contact their support team directly.



VAULTEK Customer Support logo.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question