**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## treewell THRS13C1

# treewell Remote Control Outlet User Manual

Model: THRS13C1 (1 Remote + 3 Outlets)

### Introduction

Thank you for choosing the treewell Remote Control Outlet system. This manual provides essential information for the safe and efficient use of your new device. This system allows you to wirelessly control up to three electrical appliances with a single remote, offering convenience and energy savings. Please read this manual thoroughly before installation and operation, and retain it for future reference.

### Package Contents

- 1 x Remote Control
- 3 x Remote Control Outlets
- 1 x User Manual




Image: The complete treewell remote control outlet set, including three compact outlets and a handheld remote.

## Product Features

- **1 Remote, 3 Outlets:** Easily control up to three devices from a single remote. Turn them all ON/OFF together or individually with a click. The remote has space for labeling buttons for easy identification.
- **200 FT Long Range:** The strong RF signal of this remote light switch can work through walls, doors, and windows, providing control from a distance of up to 200 feet with lag-free response.

- **Space Saving Design:** Compact design ensures each remote outlet occupies only one wall socket, without blocking adjacent outlets. Smaller than many other outlets, they fit snugly in hard-to-reach places and behind furniture.
- **Safe and Reliable:** ETL & FCC Listed for safety. Rated at 15A/1875W and built with a fire-resistant casing. Compatible with a wide range of devices, from lamps to heavy-duty appliances.
- **Programmable and Expandable:** Features free pairing with no interference. This remote control outlet system can be expanded with additional treewell wireless light switches and receiver kits, allowing activation of multiple devices with one switch or control of one device with multiple switches.




Image: A treewell mini electrical outlet plugged into a wall, showcasing its compact design that does not obstruct the second outlet.

## Setup and Installation

The treewell Remote Control Outlets are designed for simple plug-and-play installation.

1. **Plug in the Outlet:** Insert a remote control outlet into a standard 3-prong wall socket. Ensure it is securely seated.
2. **Connect Your Appliance:** Plug your desired electrical appliance (e.g., lamp, fan, holiday decoration) into the

remote control outlet.

3. **Verify Power:** The outlet's indicator light will illuminate (typically green) to confirm it is powered and ready for use.
4. **Initial Operation:** The remote control and outlets are pre-paired at the factory. You can immediately use the remote to turn the connected appliance ON or OFF.

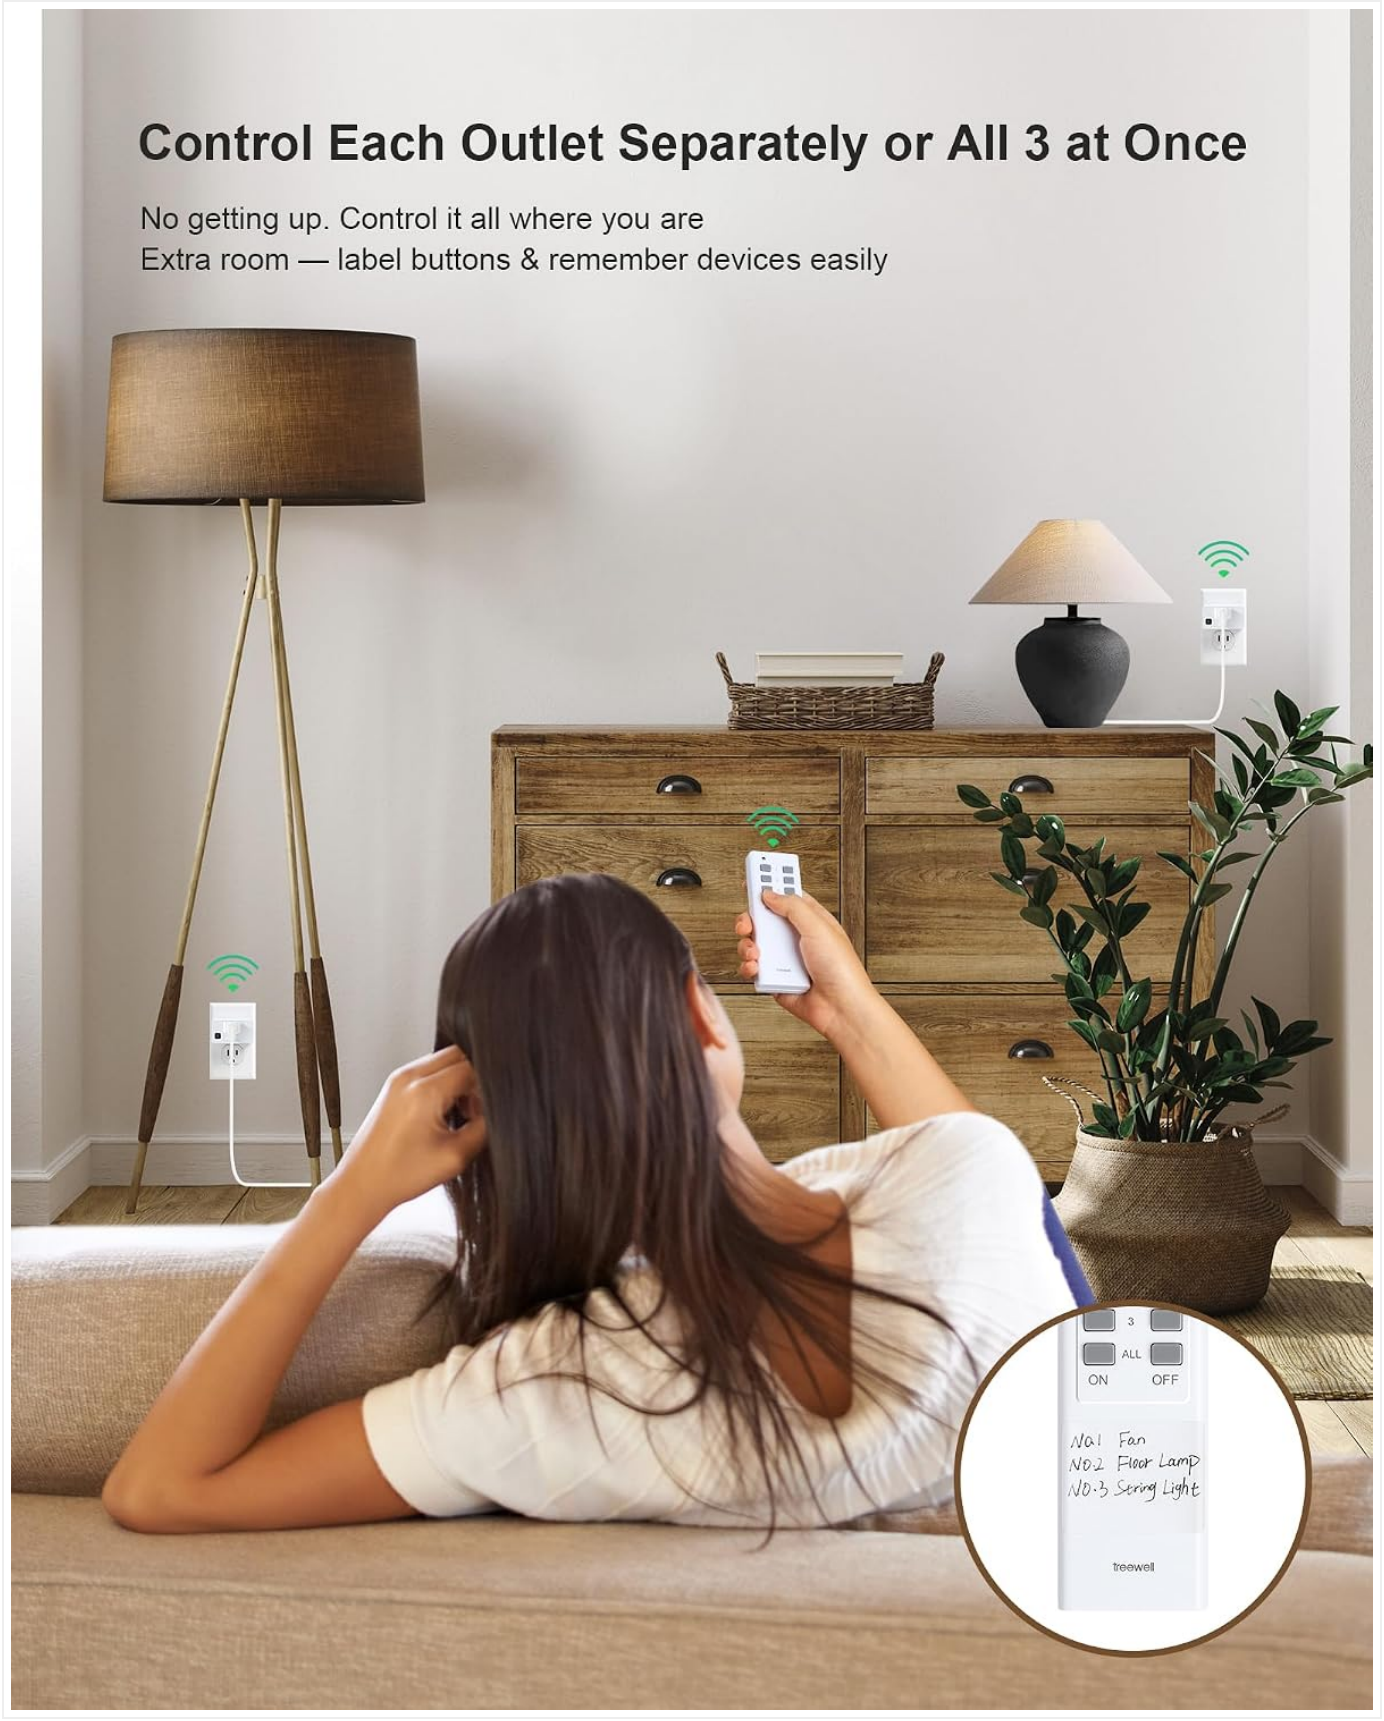



Image: A user comfortably operating household devices with the treewell remote control from a living room setting.

## Operating Instructions

## Remote Control Functions

- **Buttons 1, 2, 3 (ON/OFF):** Each numbered button pair (1 ON/OFF, 2 ON/OFF, 3 ON/OFF) corresponds to a specific remote control outlet. Press 'ON' to power on the connected device, and 'OFF' to power it off.
- **ALL (ON/OFF):** The 'ALL ON' button will activate all paired outlets simultaneously. The 'ALL OFF' button will deactivate all paired outlets simultaneously.

## Pairing and Programming (Optional)

Your treewell remote control outlets come pre-paired for immediate use. However, if you need to re-pair an outlet, pair a new outlet, or customize pairings, follow these steps:

1. **Prepare the Receiver:** Plug the remote control outlet (receiver) into a power socket.
2. **Enter Pairing Mode:** Press and hold the small ON/OFF/Program button on the side of the receiver until its indicator light begins to flash slowly. This indicates it is in pairing mode.
3. **Pair with Remote:** Within 5 seconds of the indicator light flashing, press the desired 'ON' or 'OFF' button on the remote control (e.g., '1 ON' or 'ALL ON').
4. **Confirmation:** The indicator light on the receiver will stop flashing and remain solid, confirming successful pairing. The outlet is now paired to the selected button on the remote.

To clear all pairings from an outlet, press and hold the ON/OFF/Program button until the indicator light flashes rapidly, then release. The light will turn off, indicating all previous pairings have been cleared.

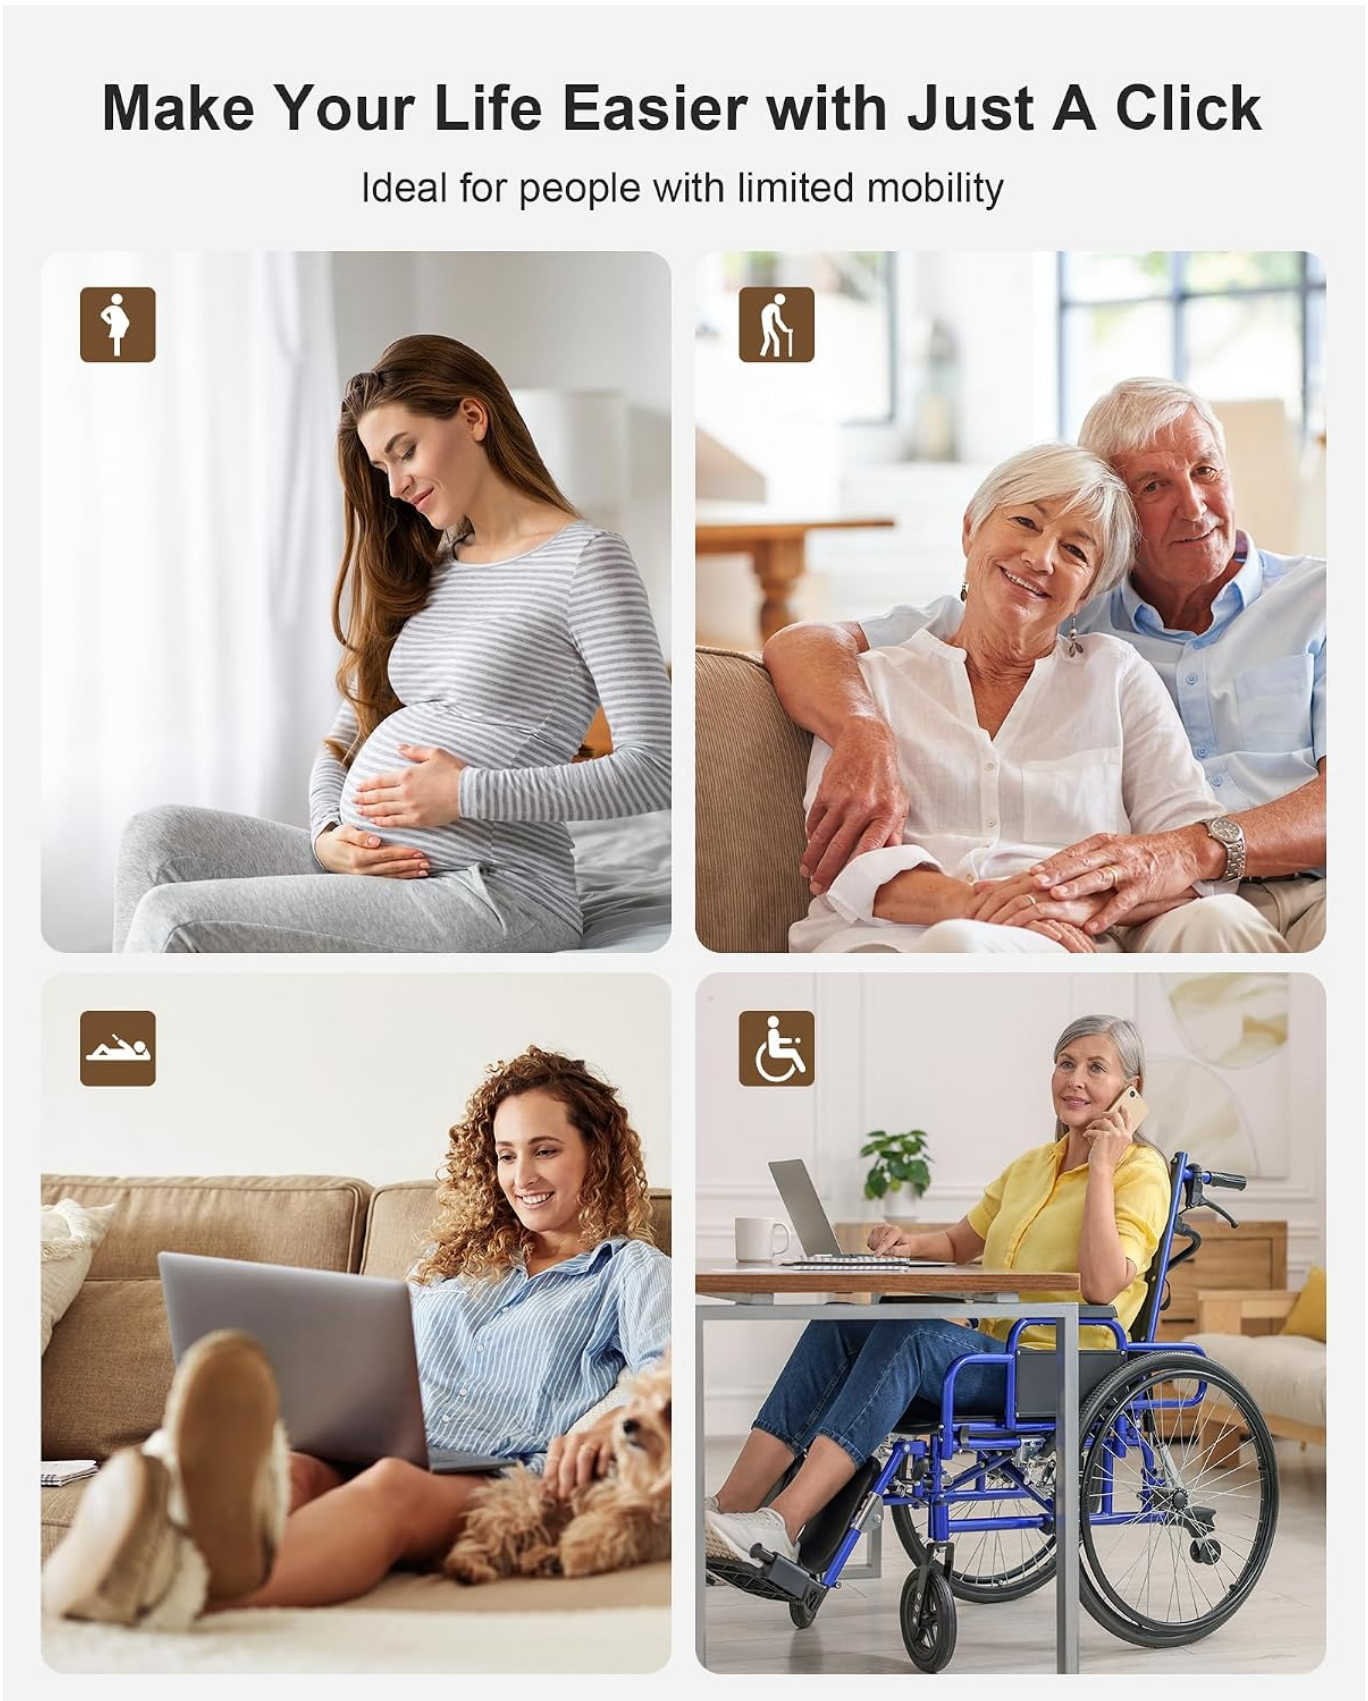



Image: Illustration of flexible pairing options, including one remote controlling multiple outlets, or multiple remotes controlling one outlet.

## Maintenance

- **Cleaning:** Disconnect the outlet from power before cleaning. Use a dry, soft cloth to wipe the surface. Do not use liquid cleaners or sprays.
- **Battery Replacement:** The remote control uses a standard battery (e.g., CR2032). If the remote's indicator light does not illuminate or its range decreases, replace the battery. Refer to the remote's back for battery compartment

access.

- **Storage:** Store the remote control outlets and remote in a cool, dry place when not in use.

## Troubleshooting

- **Device not responding to remote:**
  - Ensure the remote control outlet is securely plugged into a live power socket.
  - Check if the remote control battery needs replacement.
  - Verify that the remote control and outlet are properly paired. Refer to the "Pairing and Programming" section.
  - Ensure the remote is within the 200 FT operating range and there are no significant signal obstructions.
- **Outlet indicator light not on:**
  - Check the wall socket with another appliance to ensure it has power.
  - Ensure the remote control outlet is fully inserted into the wall socket.
- **Reduced remote range:**
  - Replace the remote control battery.
  - Minimize physical obstructions (e.g., thick walls, large metal objects) between the remote and the outlet.
  - Avoid using the system near strong electromagnetic interference sources.

## Specifications

| Feature | Detail |
|---|---|
| Model Number | THRS13C1 |
| Operation Mode | ON-OFF |
| Current Rating | 15 Amps |
| Operating Voltage | 120 Volts (AC) |
| Max Power Load | 1875W |
| Contact Type | Plug in |
| Connector Type | Plug In |
| Terminal | Plug in |
| Circuit Type | Parallel |
| Actuator Type | Push Button |
| Contact Material | Copper |
| Remote Range | Up to 200 FT (line of sight) |
| Certifications | FCC & ETL Listed |
| Dimensions (Outlet) | Approx. 2.53" L x 1.57" W x 1.39" D |
| Dimensions (Remote) | Approx. 4.33" L x 1.57" W |




Image: Detailed dimensions of the compact treewell remote control outlet and its remote.

## Safety Information

To ensure safe operation and prevent damage, please adhere to the following safety guidelines:

- **Electrical Rating:** Do not exceed the maximum load capacity of 15 Amps or 1875 Watts. Overloading can cause overheating and fire hazards.

- **Indoor Use Only:** This product is designed for indoor use in dry locations. Do not use it outdoors or in damp/wet environments.
- **Proper Grounding:** Always plug the remote control outlet into a grounded 3-prong wall socket.
- **Avoid Disassembly:** Do not attempt to disassemble, repair, or modify the device. This may void the warranty and pose safety risks.
- **Children and Pets:** Keep the device and remote control out of reach of children and pets.
- **Heat Sources:** Do not install near heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- **Ventilation:** Ensure adequate ventilation around the device. Do not cover the outlets.




Image: Examples of various household appliances compatible with the treewell remote control outlets, including holiday decorations, fans, and lamps.

## Warranty and Support

treewell products are manufactured with high-quality standards. For specific warranty details, including coverage period and terms, please refer to the warranty card included in your package or visit the official treewell website. If you encounter any issues or have questions regarding your remote control outlet system, please contact treewell customer

support. Keep your purchase receipt as proof of purchase for any warranty claims.

**Customer Support Contact:** Refer to the product packaging or the official treewell website for the most up-to-date contact information.

## Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B0G34C4ZF5**

More documents and user manuals: **https://manuals.plus/**