



Manuals.plus /

› TILSWALL /

› TILSWALL Cordless Hot Glue Gun User Manual


TILSWALL Cordless Hot Glue Gun

TILSWALL Cordless Hot Glue Gun User Manual

Model: Cordless Hot Glue Gun (B0G41Q6HTL)

1. INTRODUCTION

Thank you for choosing the TILSWALL Cordless Hot Glue Gun. This device is designed for various crafting, DIY, and repair tasks, offering portability and ease of use. It features a rapid preheating system, intelligent power-off protection, and a stable design. This manual provides essential information for safe and effective operation.

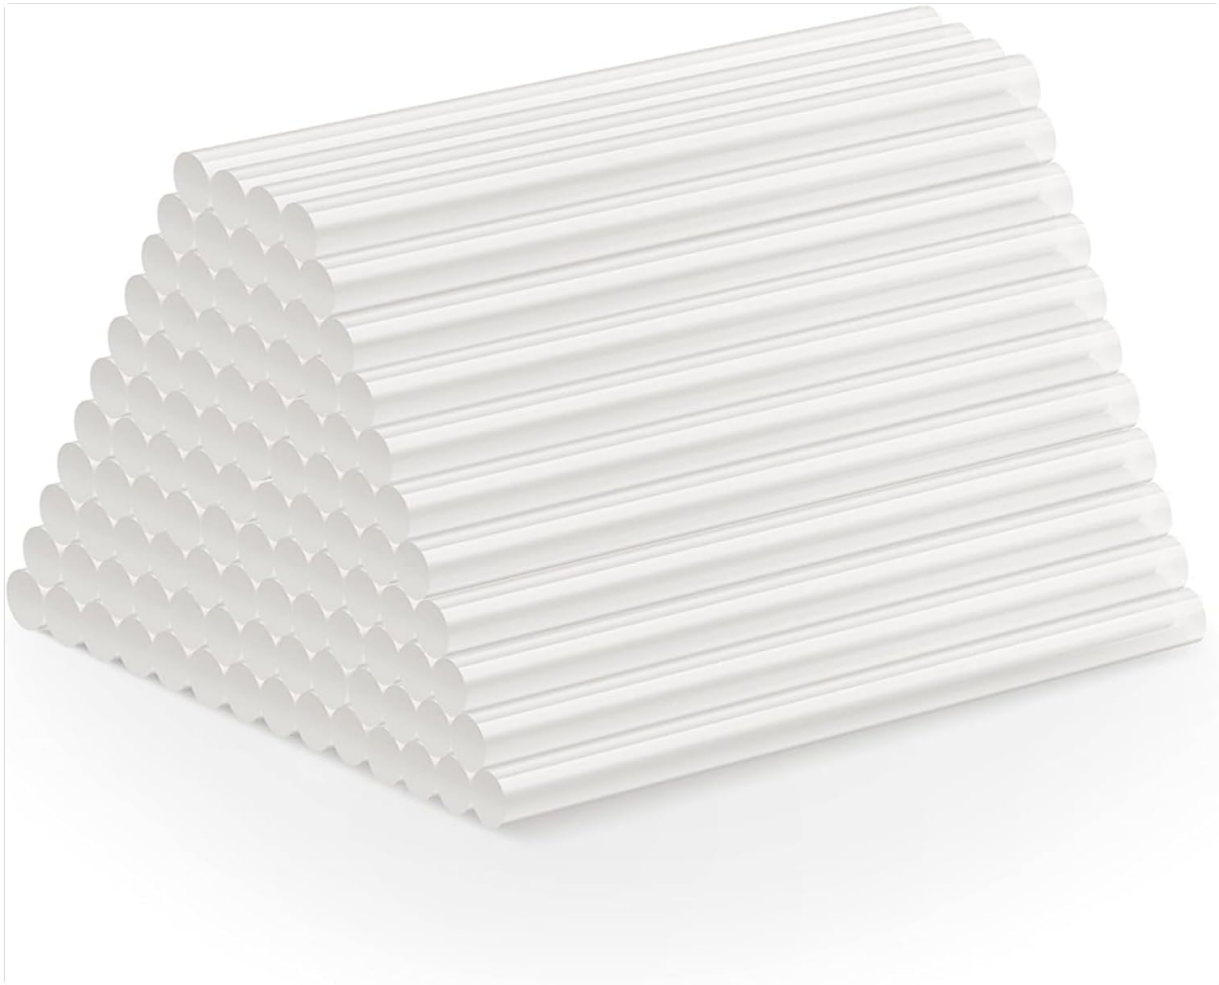

This image displays the Tilswall Cordless Hot Glue Gun along with a supply of hot glue sticks, illustrating the complete product package.

2. SAFETY INSTRUCTIONS

WARNING: Hot glue guns operate at high temperatures. Improper use can cause burns or other injuries. Read all safety instructions before use.

- Always keep the glue gun away from children. Adult supervision is required when children are present.
- Do not touch the nozzle or the melted glue directly. The nozzle and glue can reach temperatures sufficient to cause severe burns.
- Use the glue gun in a well-ventilated area.
- Never leave the hot glue gun unattended when it is powered on. The intelligent power-off feature activates after 5 minutes of inactivity, but manual power-off is recommended when not in use.
- Do not use the glue gun near flammable materials.
- Ensure the glue gun is placed on a stable, heat-resistant surface when not in hand. The spacious base is designed for stability.
- Only use glue sticks of the specified diameter (7mm) to prevent damage to the gun.
- If the glue gun is dropped or damaged, inspect it for any issues before further use.

Anti-scald and Anti-drip Nozzle



1,7mm Large
Caliber Anti-drip Nozzle



Silicone protective
cover to prevent scalding



Be careful not to touch the nozzle
to prevent burns.

This image highlights the safety features of the nozzle, including a silicone protective cover designed to prevent accidental burns and an anti-drip mechanism to minimize excess glue leakage during use.

3. PRODUCT COMPONENTS

Familiarize yourself with the parts of your TILSWALL Cordless Hot Glue Gun:

Product Structure




This diagram illustrates the main components of the hot glue gun, including the nozzle, protective silicone cap, trigger for glue dispensing, power indicator light, on/off switch, USB-C charging port, and the inlet for glue sticks. The dimensions are also indicated.

1. **Nozzle:** Dispenses melted glue. Features an anti-drip design.
2. **Silicone Cap:** Protective cover over the nozzle to prevent scalding.
3. **Trigger:** Activates the glue feeding mechanism.
4. **Indicator Light:** Shows power and heating status.
5. **Switch:** On/Off button for the device.
6. **Charging Port:** USB-C input for charging the internal battery.
7. **USB Charging Cable:** Included for recharging.
8. **Glue Inlet:** Where glue sticks are inserted.
9. **Glue Stick:** Solid adhesive material, 7mm diameter.

4. SETUP

4.1 Charging the Battery

Before first use, fully charge the glue gun. Connect the provided USB charging cable to the USB-C charging port on the glue gun and to a compatible USB power adapter (not included). The indicator light will show charging status.

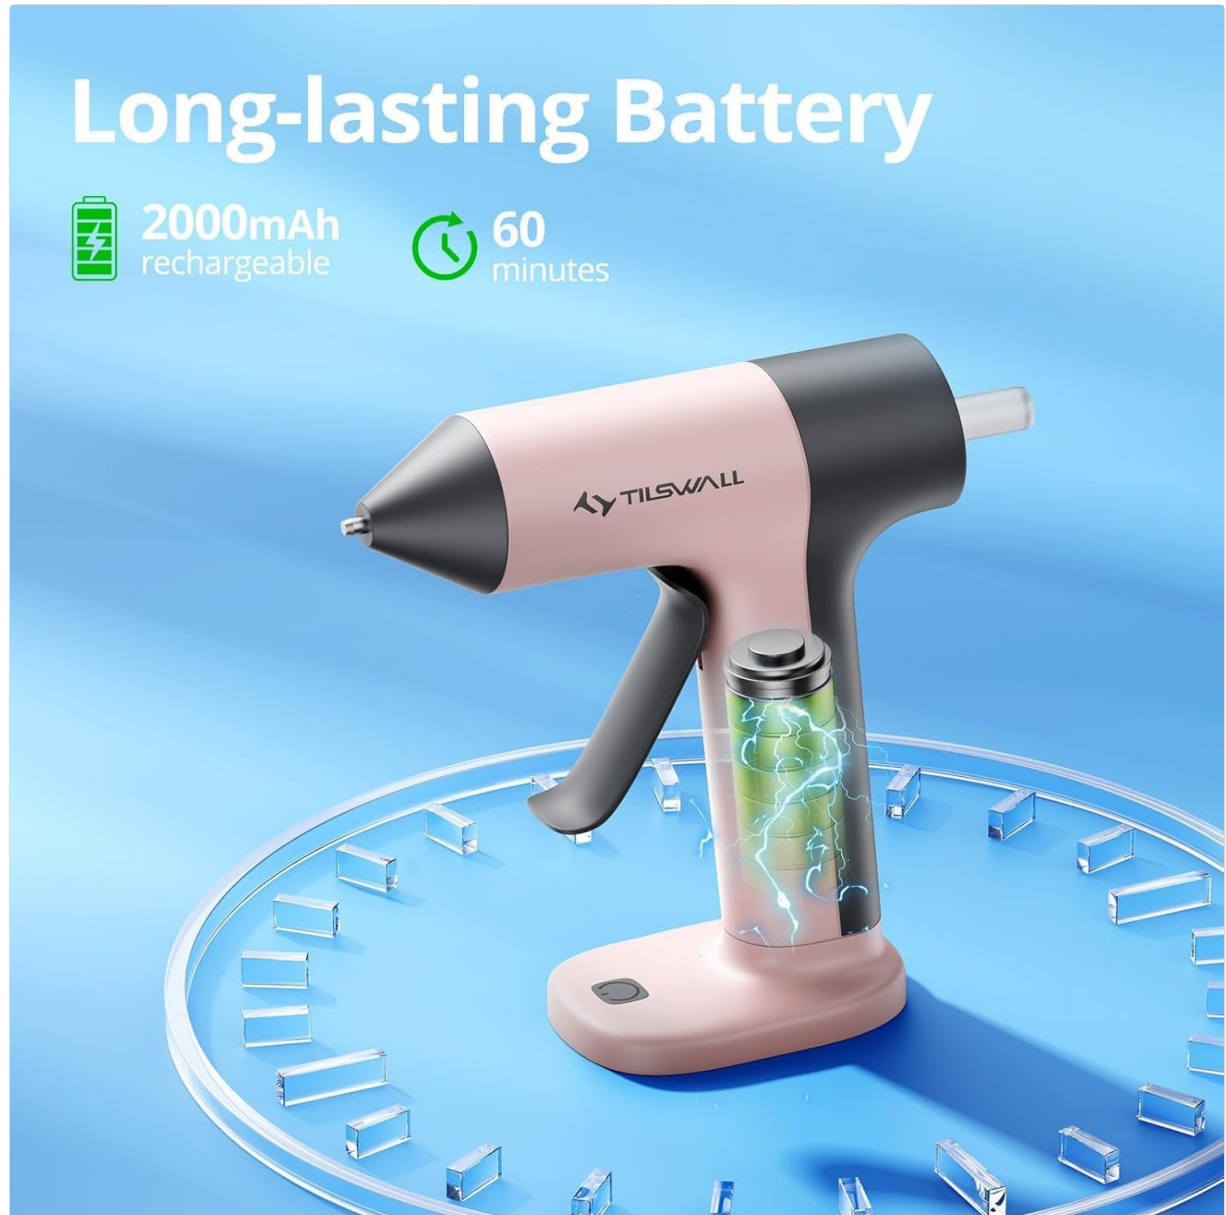

The glue gun is equipped with a 2000mAh rechargeable battery, providing approximately 60 minutes of continuous operation on a full charge. This ensures portability and extended use without a power cord.

4.2 Inserting Glue Sticks

Insert a 7mm diameter hot glue stick into the glue inlet at the rear of the gun. Push it gently until it stops. Do not force the stick.

HIGHER PURITY

Super Adhesive Eco-Friendly



Excellent clarity




High Viscosity



No Impurities



Odor Free

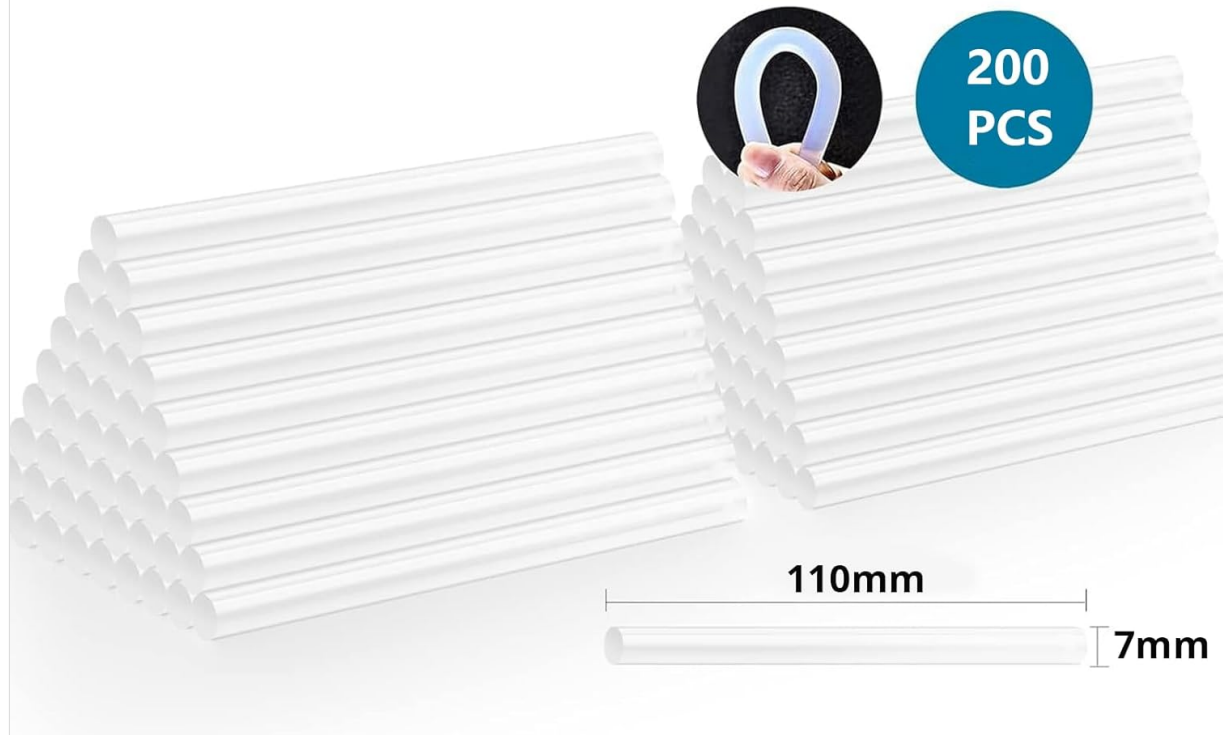

The included glue sticks are designed for high purity, offering excellent clarity, high viscosity for strong adhesion, and are odor-free. They measure 7mm in diameter and 110mm in length.

5. OPERATING INSTRUCTIONS

5.1 Powering On and Preheating

1. Press the On/Off switch to power on the glue gun. The indicator light will illuminate.
2. Allow the glue gun to preheat for approximately 30 seconds. In colder environments, this may take up to 60 seconds. The indicator light will change or stabilize once the operating temperature is reached.

30S Fast Preheating

Start Crafting Instantly!



The image demonstrates the rapid preheating capability of the glue gun, reaching operational temperature in approximately 30 seconds. This allows for quick initiation of crafting or repair projects.

5.2 Applying Glue

1. Once preheated, gently press the trigger to dispense melted glue from the nozzle.
2. Apply glue to the desired surface. For best adhesion, apply glue to one surface and press the two surfaces together within 15-30 seconds, before the glue cools and hardens.
3. If the glue stick runs short, insert a new one into the inlet and push it forward to continue dispensing.

Compact and Easy to Use

Perfect blends of style and functionality



The compact and ergonomic design of the glue gun makes it comfortable to hold and easy to maneuver for various crafting and repair tasks.

5.3 Automatic Power-Off

The glue gun is equipped with an intelligent power-off protection feature. If left idle for more than 5 minutes, the device will automatically power off to enhance safety, prevent overheating, and conserve battery life. To resume operation, simply press the On/Off switch again.

Spacious Base

Steady and Tip-Resistant



The glue gun features a wide and stable base, designed to prevent tipping during use or when placed on a work surface. This enhances safety and ease of handling.

6. MAINTENANCE

- **Cleaning:** Ensure the glue gun is completely cool before cleaning. Gently wipe the exterior with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Nozzle Care:** Do not attempt to clean the nozzle while the gun is hot. Any dried glue around the nozzle can be carefully removed once the gun is cold.
- **Storage:** Store the glue gun in a dry, cool place, away from direct sunlight and out of reach of children. Ensure no glue stick is left partially melted in the gun during long-term storage.

7. TROUBLESHOOTING

- **Glue not dispensing:** Ensure the glue gun is fully preheated. Check if a glue stick is properly inserted and if the trigger is being pressed firmly.
- **Glue gun not heating:** Verify that the battery is charged and the power switch is in the 'On' position. If the battery is low, recharge the device.

- **Excessive dripping:** A small amount of dripping is normal for hot glue guns. Ensure the gun is fully preheated before use, as insufficient heat can cause more dripping. The anti-drip nozzle design minimizes this.
- **Indicator light not working:** Check if the glue gun is powered on and charged. If issues persist, contact customer support.

8. SPECIFICATIONS

Feature	Specification
Model	Cordless Hot Glue Gun
Brand	TILSWALL
ASIN	B0G41Q6HTL
Preheating Time	Approx. 30 seconds (30-60 seconds in low temperatures)
Battery Capacity	2000mAh (Built-in)
Operating Time	Approx. 60 minutes (on full charge)
Glue Stick Diameter	7mm (0.27 inches)
Glue Stick Length	110mm (4.33 inches)
Charging Interface	USB-C
Automatic Shut-off	After 5 minutes of inactivity

9. WARRANTY AND SUPPORT

TILSWALL products are manufactured to high-quality standards. For warranty information or technical support, please refer to the product packaging or contact TILSWALL customer service through their official website or the retailer where the product was purchased. Please have your model number (B0G41Q6HTL) and purchase date available when contacting support.