

Jimveo J01Pro

Jimveo J01Pro 4K Mini Ultra Short Throw Projector User Manual

Model: J01Pro

1. INTRODUCTION

Thank you for purchasing the Jimveo J01Pro 4K Mini Ultra Short Throw Projector. This manual provides essential information for the safe and efficient use of your projector. Please read it thoroughly before operation and keep it for future reference.

2. SAFETY INFORMATION

Please observe the following safety precautions to prevent damage to the projector or injury to yourself:

- Do not look directly into the projector lens when the lamp is on.
- Ensure proper ventilation around the projector to prevent overheating.
- Do not expose the projector to rain, moisture, or extreme temperatures.
- Use only the power adapter supplied with the projector.
- Keep the projector away from water and other liquids.
- Do not attempt to disassemble or modify the projector. Refer all servicing to qualified personnel.

3. WHAT'S IN THE BOX

Verify that all items are present in the package:

- Projector Unit
- Power Adapter
- Power Cord
- HDMI Cable
- Remote Control
- User Manual

- Adjustable Stand (270° rotation)

270° de Rotation | Idéal pour Les Espaces Réduits

Plafond



Mur



Suspendu



Incliné



Image: Jimveo J01Pro Projector with remote control and Google TV interface displayed on a screen.

4. PRODUCT OVERVIEW

4.1 Key Features

- **Google TV Certified:** Access Netflix, YouTube, Prime Video, Disney+, and over 10,000 certified applications.
- **Ultra Short Throw (1:1 Ratio):** Project a 60-inch screen from 0.8m, up to 150 inches from 3.3m.
- **1600 Lumens Brightness:** Native 1080P resolution with HDR10 support for clear, vibrant images.
- **AI Auto-Adjustment:** Automatic focus and vertical keystone correction, with motorized horizontal correction and 4D+4P adjustment.
- **Connectivity:** Wi-Fi 6, Bluetooth 5.4, HDMI, USB, 3.5mm audio output, HDMI ARC/CEC.
- **Portable Design:** Compact (19x15.7x7.3 cm) and lightweight (0.87 kg) with a 270° rotatable stand.

- **Eye Protection:** Diffuse reflection imaging for soft, natural light.

4.2 Projector Components



Image: Front view of the Jimveo J01Pro Projector mounted on its adjustable stand.

- **Front:** Lens, Auto-focus sensor.
- **Side:** Ventilation grilles.
- **Rear:** Power port, IR receiver, HDMI port, USB port, 3.5mm audio output.
- **Bottom:** Mounting screw hole, filter access.



Image: Diagram illustrating the various input and output ports on the Jimveo J01Pro projector, including Power, IR, HDMI, USB, and Audio.

5. SETUP

5.1 Attaching the Adjustable Stand

The projector comes with a 270° rotatable stand for flexible positioning. Follow these steps to attach it:

1. Identify the screw hole on the bottom of the projector and the corresponding hole on the stand.
2. Align the holes and secure the stand to the projector using the provided screw.
3. Adjust the stand to your desired projection angle (front, inclined, ceiling, or wall).

Your browser does not support the video tag.

Video: Demonstration of attaching the adjustable stand to the Jimveo J01Pro projector and adjusting its angle for various projection setups.



Image: The Jimveo J01Pro projector demonstrating its 270° rotation capability for ultra-flexible installation in various environments.

5.2 Power Connection

Connect the power adapter to the projector's power port and then plug it into a wall outlet.

5.3 Initial Power-On and Google TV Setup

Press the power button on the projector or remote control to turn it on. Follow the on-screen instructions to complete the initial Google TV setup, including connecting to your Wi-Fi network and logging into your Google account.

5.4 Automatic Focus and Keystone Correction

The J01Pro features AI auto-focus and automatic vertical keystone correction. Upon startup or movement, the projector will automatically adjust the image for clarity and a rectangular shape. Manual adjustments for horizontal keystone (4D+4P) are also available in the settings menu if needed.



Image: The Jimveo J01Pro projector showcasing its automatic focus and keystone correction features, ensuring a perfectly aligned and clear image.

6. OPERATING INSTRUCTIONS

6.1 Remote Control and Voice Control

Use the included Bluetooth remote control to navigate the Google TV interface. The integrated Google Assistant allows for voice commands. Simply press the voice control button on the remote and speak your command, such as "Open

YouTube" or "What's the weather?"



Image: The Jimveo J01Pro projector's Google TV interface with the remote control, highlighting voice control capabilities via Google Assistant.

6.2 Connecting External Devices

The projector supports various connectivity options:

- **HDMI:** Connect gaming consoles (Switch, PS5), DVD players, or PCs using the HDMI cable.
- **USB:** Play media files directly from a USB drive.
- **Bluetooth 5.4:** Connect wireless headphones or external Bluetooth speakers.
- **Wi-Fi 6:** Ensure a stable and fast connection for 4K streaming.
- **HDMI ARC/CEC:** Connect a soundbar for enhanced audio with simplified control.



Image: The Jimveo J01Pro projector highlighting its multi-port design and broad compatibility with devices like smartphones, PCs, and gaming consoles.

6.3 Adjusting Projection Size and Position

- **Zoom Function:** Use the remote control to adjust the image size from 60% to 100% without moving the projector.
- **Stand Adjustment:** The 270° rotatable stand allows you to easily change the projection angle and direction.



Image: Illustration of the Jimveo J01Pro projector's ultra-short throw capability, showing different screen sizes achievable at various projection distances.

7. MAINTENANCE

7.1 Cleaning the Dust Filter

Regularly cleaning the dust filter helps maintain optimal performance and extends the projector's lifespan. Follow these steps:

1. Turn off and unplug the projector.
2. Locate the filter cover on the bottom of the projector.
3. Carefully remove the filter cover and the filter.
4. Clean the filter using a soft brush or compressed air. Ensure it is completely dry before reinserting.
5. Replace the filter and cover, ensuring they are securely in place.

Your browser does not support the video tag.

Video: Demonstration of how to remove, clean, and reinsert the dust filter on the Jimveo J01Pro projector.

7.2 Cleaning the Lens

Use a soft, lint-free cloth specifically designed for optical lenses to gently wipe the projector lens. Do not use abrasive cleaners or excessive force.

7.3 General Cleaning

Wipe the exterior of the projector with a soft, dry cloth. Avoid using chemical cleaners that may damage the finish.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
No image displayed	Power cable disconnected, incorrect input source, device not powered on.	Check power connections. Select the correct input source (HDMI, USB). Ensure connected devices are powered on.

Problem	Possible Cause	Solution
Blurry image	Out of focus, incorrect keystone correction.	Allow auto-focus to complete. Adjust manual keystone correction if needed via settings. Ensure projector is stable.
No sound	Volume too low, external audio device not connected, incorrect audio output selected.	Increase volume. Check Bluetooth or HDMI ARC connections. Select correct audio output in settings.
Remote control not working	Batteries low/dead, remote not paired.	Replace batteries. Re-pair the Bluetooth remote control with the projector.
Wi-Fi connection issues	Weak signal, incorrect password, router issues.	Move projector closer to router. Re-enter Wi-Fi password. Restart router and projector.

9. SPECIFICATIONS

Feature	Detail
Brand	Jimveo
Model Number	J01Pro
Display Resolution	1920 x 1080 (Native 1080P)
Brightness	1600 Lumens
Connectivity Technology	Bluetooth 5.4, HDMI, USB, Wi-Fi 6 (802.11 ac/b/g/n), 3.5mm Audio
Special Features	Google TV, Auto-Focus, Auto Keystone Correction, 4D+4P Correction, 270° Rotatable Stand, HDR10, AI Super Clarity, AI Noise Reduction, Voice Control
Product Dimensions	19L x 15.7W x 7.3H cm
Light Source Life	30,000 Hours
Max Projection Distance	8 Meters
Compatible Devices	Speakers, Laptops, Smartphones, Tablets
Control Method	Application, Push Button, Remote Control
GTIN	614141744435

10. WARRANTY AND SUPPORT

The Jimveo J01Pro projector comes with a **3-year manufacturer's warranty**. For any questions, technical assistance, or warranty claims, please contact Jimveo customer support. You can find detailed contact information in the original packaging or on the official Jimveo website.

Customer support is available in French within 24 hours. A comprehensive user guide and YouTube tutorials are also available for immediate assistance.

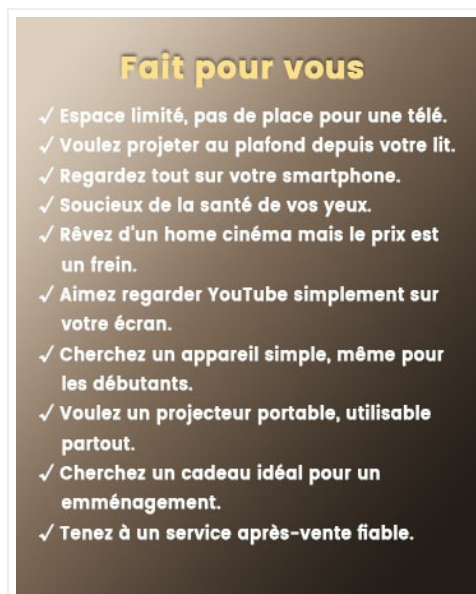


Image: Jimveo customer service details, including 24-hour response, 36-month warranty, 30-day return policy, and lifetime technical assistance.

