

Thereye ER-SC06-2

Thereye ER-SC06-2 Self-Cleaning Open-Top Automatic Cat Litter Box User Manual

Model: ER-SC06-2

INTRODUCTION

Thank you for choosing the Thereye ER-SC06-2 Self-Cleaning Open-Top Automatic Cat Litter Box. This manual provides essential information for the safe and efficient operation, setup, and maintenance of your new device. Please read this manual thoroughly before use and retain it for future reference.

IMPORTANT SAFETY INFORMATION

To ensure safe operation and prevent damage, please observe the following:

- Do not place a mat directly under the unit, as this may interfere with weight detection sensors.
- Ensure the device is placed on a stable, level surface.
- Keep the device away from water and excessive moisture.
- Do not allow children or pets to tamper with the internal mechanisms during operation.
- Use only clumping cat litter with this device.
- Unplug the device before performing any cleaning or maintenance.

PACKAGE CONTENTS

Verify that all items are present in your package:

- Thereye Self-Cleaning Cat Litter Box Unit
- User Manual
- Quick Start Guide
- Waste Bags (Cat Pan Liners)
- Cleaning Brush
- Power Cord
- Cat Litter Deodorizer

- Legs (4 pieces)

SETUP GUIDE

- 1. Unboxing and Initial Inspection:** Carefully remove all components from the packaging. Inspect the unit for any signs of damage.
- 2. Attach the Legs:**
The unit comes with four legs. Each leg is marked 'R' (Right) or 'L' (Left) on the bottom. Match these markings to the corresponding slots on the underside of the litter box. Push each leg firmly into its designated slot until it clicks into place.



Image: Underside of the litter box with labeled leg attachment points.

- 3. Remove Shaft Covers:**
Locate the rotating shaft covers on both sides of the main drum. Slide the locks to the 'on' position to unlock, then lift and remove the covers. This exposes the internal gear mechanism.

Integrated Safety Protection

Motor Overload Protection

Over 800mA,
auto-reset & alarm

3-Pair Infrared Sensors

Zero risk of
pinch cat

4 Weight Sensors

Auto stops when weight is detected

App Warning

Receive exception alerts

Image: Exposed gear mechanism after removing the shaft cover.

4. Insert Deodorizer and Waste Bag:

Pull out the waste bin from the bottom of the unit. Place the provided deodorizer into the designated slot within the waste bin. Line the waste bin with one of the provided waste bags, ensuring it is smoothed out and tucked into the slots to prevent interference.

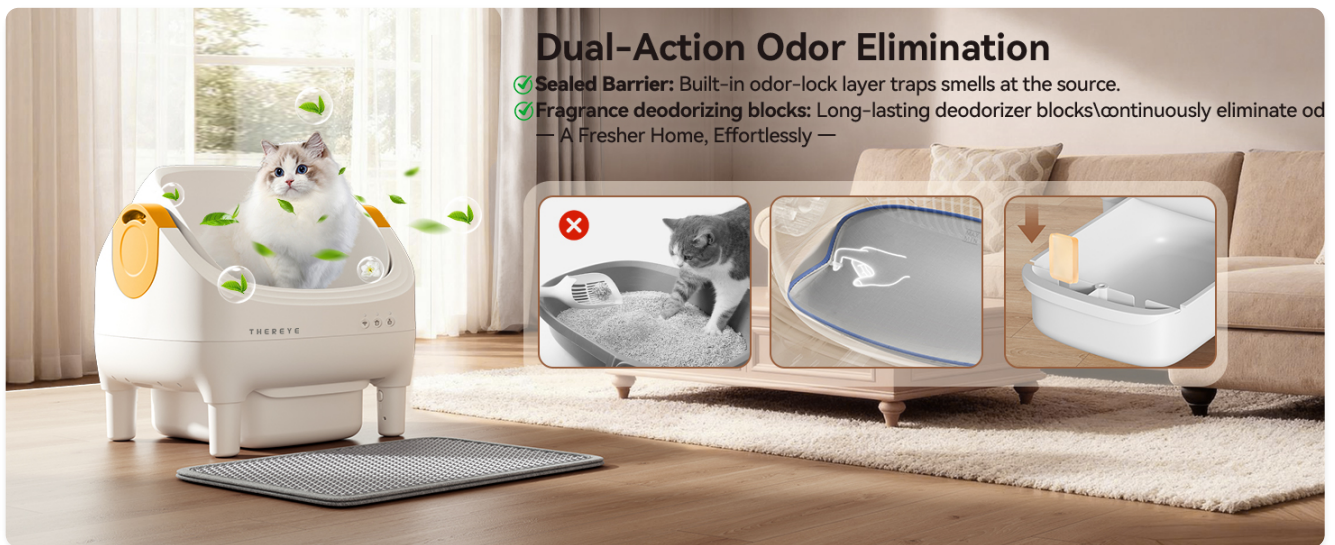


Image: Illustration of deodorizer and waste bag placement for odor control.

Slide the waste bin back into the unit until it is securely in place.

5. Add Cat Litter:

Pour clumping cat litter into the main drum. Ensure the litter level is between the 'MIN' and 'MAX' lines indicated inside the drum. The unit is compatible with all types of clumping cat litter.



Image: Different types of clumping litter suitable for the device.

6. Connect Power:

Plug the power cord into the designated port on the back of the unit, then plug the adapter into a standard electrical outlet.

OPERATING INSTRUCTIONS

Smart App Control

The Thereye ER-SC06-2 features 2.4GHz Wi-Fi support for remote monitoring and control via a dedicated smartphone application. Download the Tuya Smart app from your device's app store.

1. **Download and Open App:** Install the Tuya Smart app on your smartphone.
2. **Add Device:** Open the app, tap the '+' icon in the upper right corner, and select 'Add Device'.
3. **Pairing:** Press and hold the Wi-Fi button on the litter box for 3 seconds until you hear a beep. The app should detect

the device (ER-SC06-2). Tap to connect.

4. **App Functions:** Once connected, you can:

- Monitor real-time data, including cat's weight and litter box habits.
- Initiate 'Empty' or 'Clean' cycles remotely.
- Reset the device.
- Set cleaning schedules.
- Switch between 'Automatic' and 'Manual' working modes.
- Adjust unit settings (e.g., change weight units to pounds).
- Receive waste bin reminders.



Image: Tuya Smart app interface for remote control and monitoring.

Automatic Cleaning Cycle

The litter box is designed to automatically clean after your cat uses it. It features a safety system with 4 weight sensors and 3 infrared sensors. If a cat enters the litter box during a cleaning cycle, the cycle will automatically pause to ensure the cat's safety.



Image: Safety sensors for automatic pause during cleaning.

MAINTENANCE

Emptying the Waste Bin

When the waste bin is full, the app will send a reminder. To empty:

1. Pull out the waste bin from the bottom of the unit.
2. Carefully remove the filled waste bag, tie it securely, and dispose of it.
3. Replace with a new waste bag and reinsert the waste bin into the unit.

Cleaning the Unit

Regular cleaning ensures optimal performance and hygiene.

- Unplug the device before cleaning.
- Use the provided cleaning brush to remove any residual litter or debris from the interior of the drum and the sifting mechanism.
- Wipe down the exterior and interior surfaces with a damp cloth and mild, pet-safe cleaner. Avoid harsh chemicals.
- Ensure all parts are dry before plugging the unit back in.

Replacing the Deodorizer

The deodorizer helps neutralize odors. Replace it periodically as needed. To replace, remove the waste bin, take out the old deodorizer from its slot, and insert a new one.

TROUBLESHOOTING

If you encounter issues with your Thereye litter box, refer to the following common solutions:

- **Unit Not Responding:** Ensure the power cord is securely plugged into both the unit and the wall outlet. Check if the power button is illuminated.
- **App Connectivity Issues:** Verify that your Wi-Fi network is 2.4GHz and stable. Ensure the litter box is within range of your Wi-Fi router. Try restarting both the litter box and your smartphone app.
- **Cleaning Cycle Malfunction:** Check for any obstructions in the drum or sifting mechanism. Ensure the shaft covers are correctly installed and locked. Verify that no mat is placed under the unit interfering with weight sensors.
- **Odor Persistence:** Ensure the deodorizer is fresh and correctly placed. Regularly empty the waste bin and clean the unit.
- **Inaccurate Weight Readings:** Confirm that the unit is on a flat, stable surface and no objects are leaning against it. Avoid placing mats directly underneath.

For persistent issues, please contact Thereye customer support.

SPECIFICATIONS

Feature	Detail
Brand	Thereye
Model Name	ER-SC06-2
Product Dimensions	21"L x 16"W x 22"H

Feature	Detail
Material	Acrylonitrile Butadiene Styrene (ABS)
Color	White and Yellow
Litter Box Type	Automated Self-Cleaning Litter Box
Waste Bin Capacity	10L
Connectivity	2.4GHz Wi-Fi (App Control)
Safety Features	4 Weight Sensors, 3 Infrared Sensors, Motor Overload Protection
Target Audience	House Cats (3.3lb kittens to 27.6lb large breeds)
Specific Uses	Indoor

WARRANTY AND SUPPORT

For warranty information, technical support, or service inquiries, please refer to the contact details provided in your Quick Start Guide or visit the official Thereye website. Keep your purchase receipt as proof of purchase.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

