RIENOK S17

RIENOK S17 100W Portable Voice Amplifier User Manual

Model: S17 | Brand: RIENOK

1. Introduction

The RIENOK S17 is a 100W portable voice amplifier designed for clear, long-distance voice projection and versatile audio playback. It features dual wireless microphones, multiple connectivity options, and customizable sound effects, making it suitable for various applications such as public speaking, karaoke, and musical performances.

2. What's in the Box

Carefully unpack the contents and ensure all items are present:

- Amplifier (1 unit)
- Microphone (2 units)
- Charging Cable (1 unit)
- AUX Cable (1 unit)
- Carrying Strap (1 unit)
- User Manual (1 unit)



Image: Contents of the RIENOK S17 package, including the amplifier, two microphones, charging cable, AUX cable, carrying strap, and user manual.

3. Product Overview

The RIENOK S17 features a robust design with intuitive controls and powerful audio components.

3.1 Amplifier Components



Image: Top panel of the RIENOK S17 amplifier showing various control knobs and buttons for volume, echo, bass, treble, and playback.

- **Main Volume Knob:** Adjusts the overall output volume.
- **Microphone Volume Knob:** Controls the volume of the connected microphones.
- **Echo Knob:** Adjusts the echo effect for microphones.
- **Bass/Treble Knobs:** Fine-tune the bass and treble frequencies.

- **Playback Controls:** Buttons for play/pause, next/previous track, and mode selection.
- **HD Screen Display:** Shows current mode, battery level, and other status indicators.
- **Dynamic LED Light:** Illuminates the speaker grille with various light effects.

3.2 Wireless Microphones



Image: Two wireless microphones included with the RIENOK S17, featuring power buttons, volume controls, and status indicators.

- **Power Button:** Turns the microphone on/off.
- **Volume Buttons (+/-):** Adjusts microphone input volume.
- **Status Indicator:** Shows connection and battery status.
- **Type-C Charging Port:** For recharging the microphone battery.

4. Setup

4.1 Charging the Amplifier and Microphones

1. Connect the provided charging cable to the amplifier's Type-C charging port and a suitable USB power adapter (not included).
2. Connect the charging cable to each microphone's Type-C charging port.
3. The battery indicator on the amplifier's display and the microphone's status indicator will show charging progress. Charge fully before first use.

4.2 Powering On/Off

- **Amplifier:** Press and hold the power button on the amplifier until the display lights up.
- **Microphones:** Press and hold the power button on each microphone until the status indicator lights up.

4.3 Connecting Wireless Microphones

The microphones are pre-paired with the amplifier. Simply power on both the amplifier and microphones, and they should connect automatically. If connection issues occur, refer to the troubleshooting section.

5. Operating Instructions

5.1 Connectivity Options

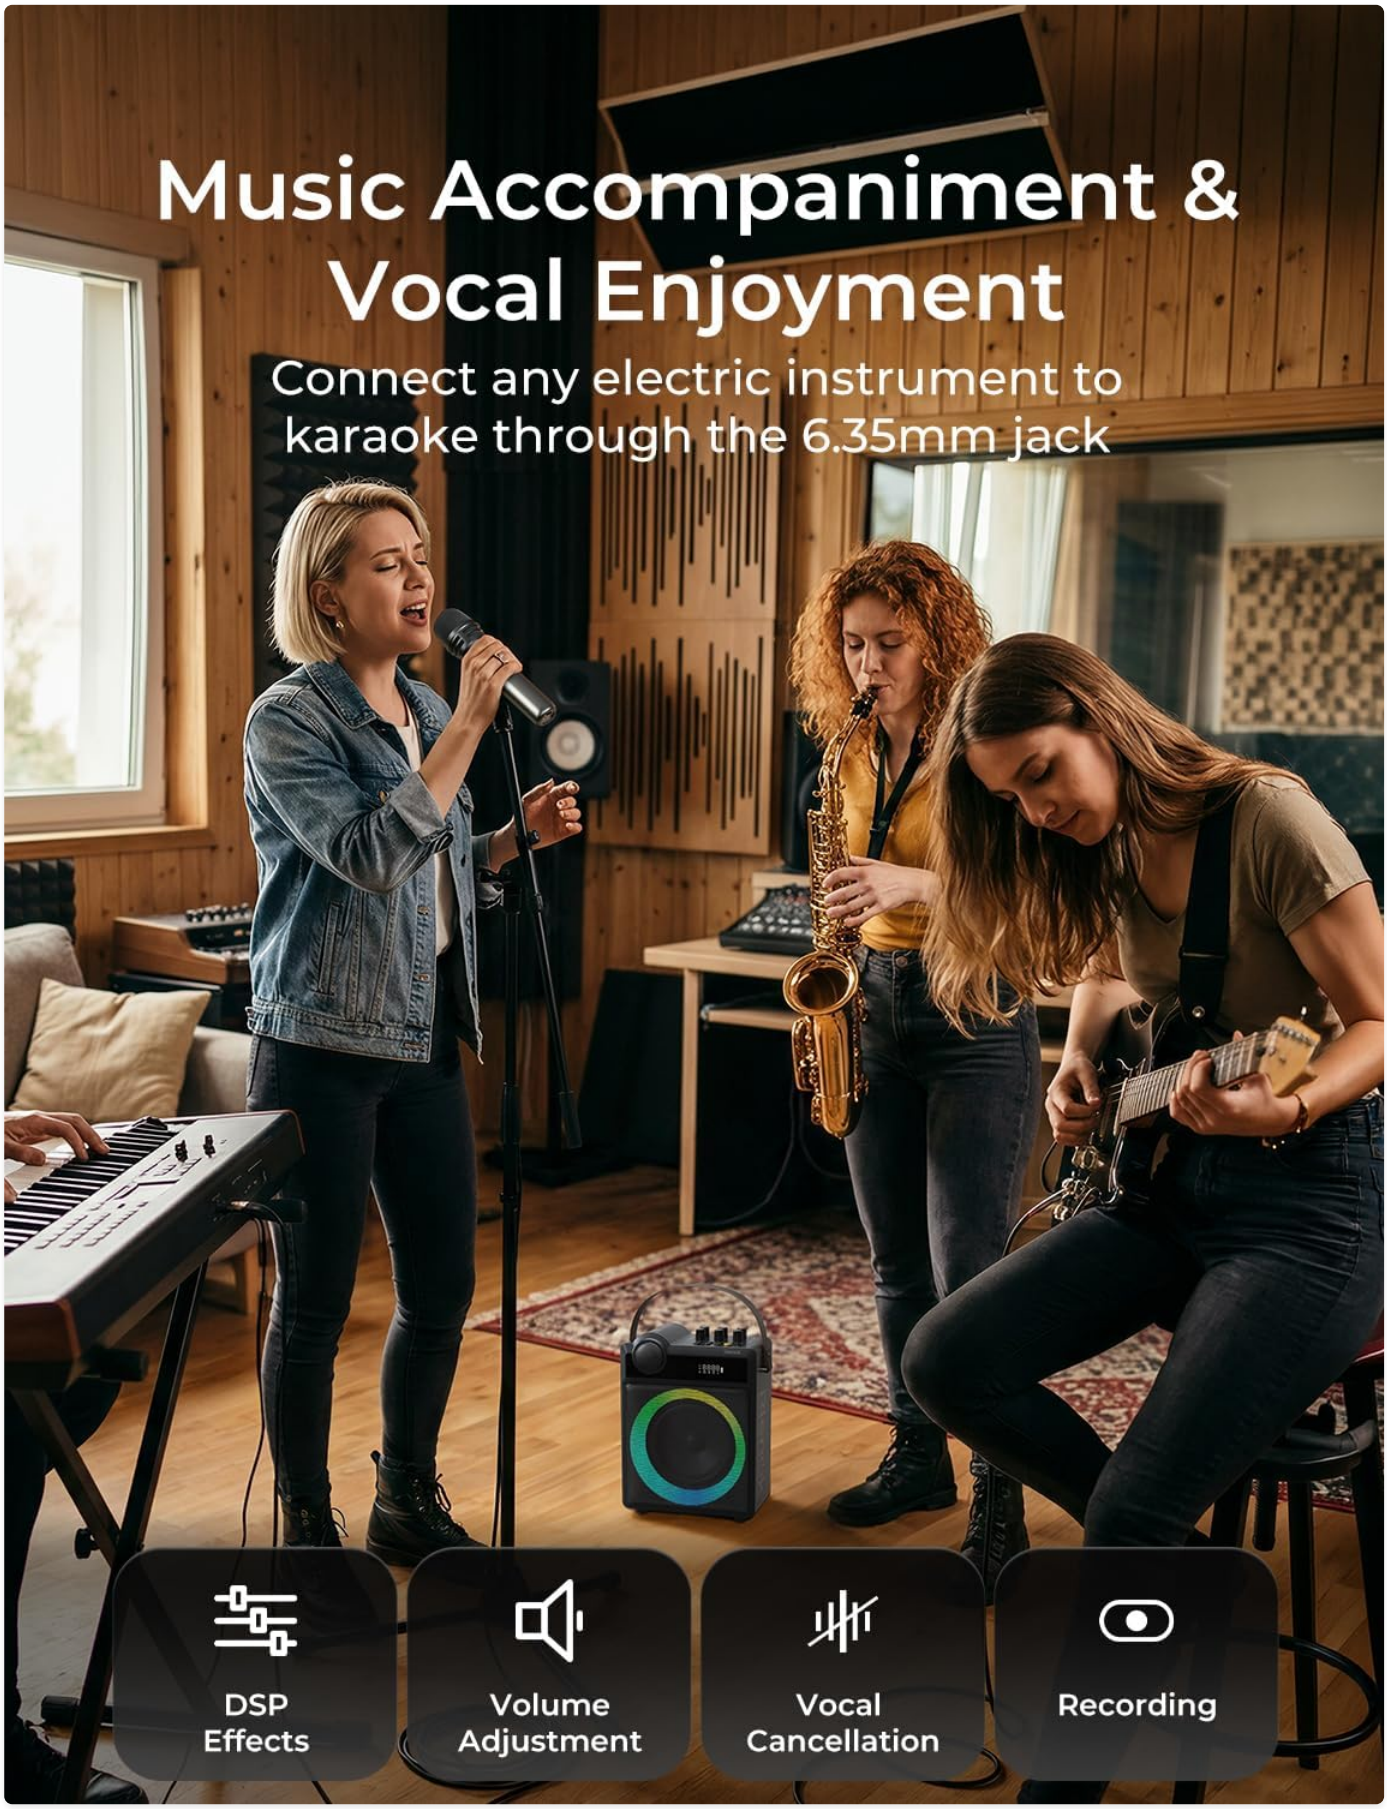


Image: Side panel of the RIENOK S17 amplifier displaying the 6.35mm instrument jack, USB port, TF card slot, 3.5mm AUX input, and OTG/Type-C charging port.

- **Bluetooth 5.3:**
  1. Turn on the amplifier. The display will show 'BLUE'.
  2. Enable Bluetooth on your device (e.g., smartphone, tablet).
  3. Select 'RIENOK S17' from the list of available devices to pair.

4. Once connected, the display will show 'BLUE' steadily.

- **USB/TF Card:** Insert a USB drive or TF card into the respective slot. The amplifier will automatically switch to USB/TF mode and begin playing supported audio files.
- **AUX Input:** Connect an external audio device using the 3.5mm AUX cable. The amplifier will automatically switch to AUX mode.
- **6.35mm Instrument Jack:** Plug in an instrument (e.g., guitar) into the 6.35mm jack. Adjust the instrument volume using the dedicated knob.

5.2 Sound Management & Effects

- **Volume Control:** Use the main volume knob for overall sound level. Adjust microphone volume with its dedicated knob.
- **Echo Adjustment:** Rotate the Echo knob to add or reduce reverberation to your vocals.
- **Bass & Treble:** Use the Bass and Treble knobs to customize the audio output to your preference.
- **Intelligent Feedback Suppression:** The amplifier features a one-knob intelligent feedback suppression system to prevent howling.
- **Vocal Cancel:** Press the 'Vocal Cancel' button to remove vocals from a playing track, ideal for karaoke.
- **Recording:** The amplifier supports recording. Refer to the detailed instructions in the included paper manual for specific steps.

5.3 Dynamic LED Light Show

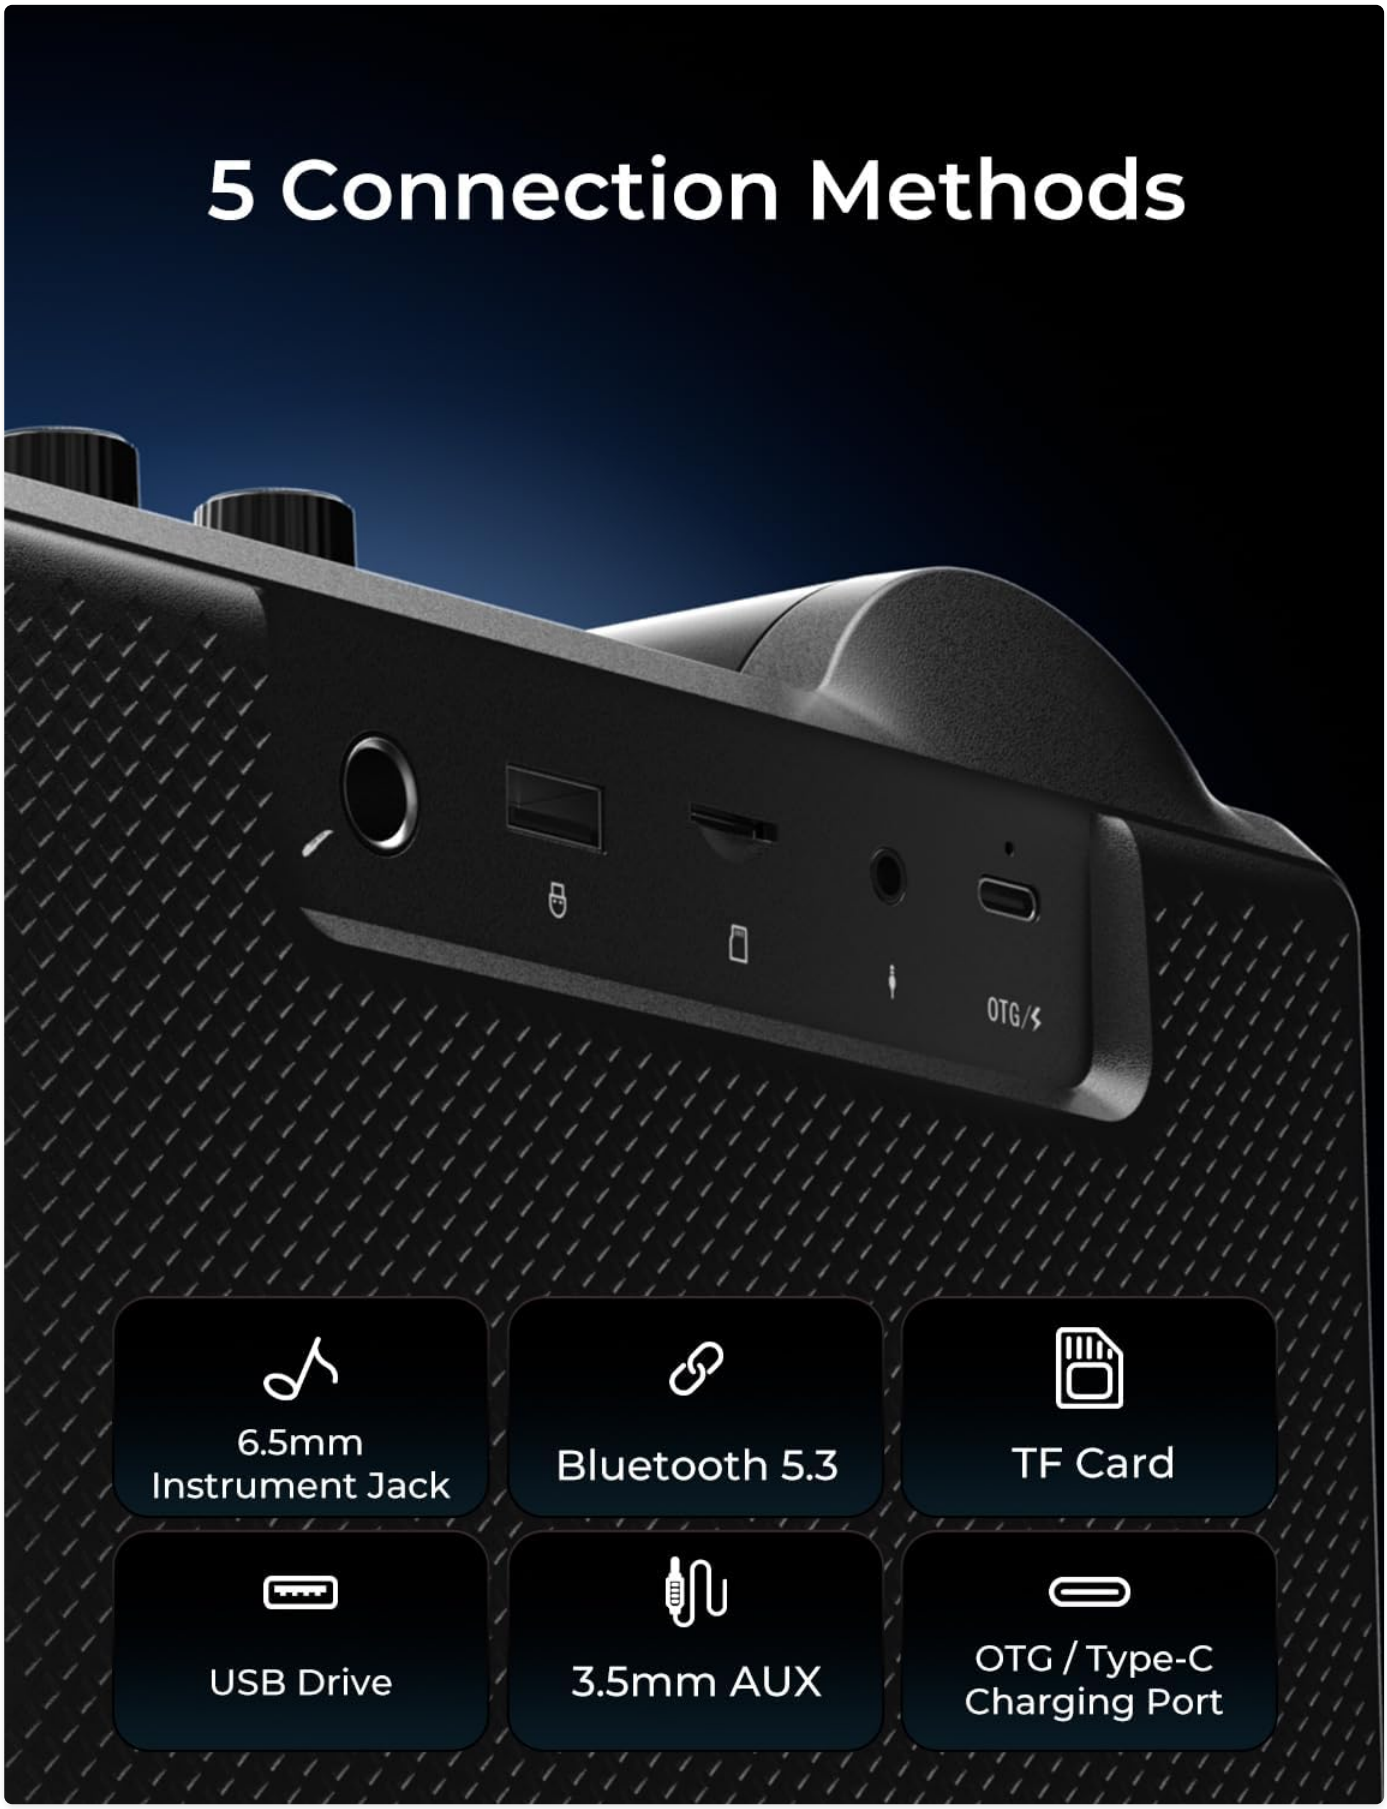


Image: The RIENOK S17 amplifier showcasing its dynamic LED light ring, which changes colors to enhance the atmosphere.

The amplifier features dynamic LED lights around the speaker grille. Short press the dedicated light button (often integrated with playback controls) to cycle through different light modes or turn them off.

5.4 Usage Scenarios



Image: Examples of how the RIENOK S17 amplifier can be used, such as for home karaoke, public speaking, street performances, and providing backing tracks for dance.

The RIENOK S17 is versatile for:

- Home Karaoke
- Conference Speeches

- Street Performances
- Dance Backing Tracks
- Tour Guides and Teachers

6. Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the amplifier and microphones. Do not use abrasive cleaners or solvents.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, fully charge the device before long periods of inactivity and recharge every 3 months.
- **Water Resistance:** The unit features a splash-resistant casing. Avoid submerging it in water or exposing it to heavy rain.

7. Troubleshooting

Problem	Possible Cause	Solution
No power	Low battery	Charge the amplifier/microphones fully.
No sound from speaker	Volume too low; Incorrect input mode; Device not connected	Increase volume; Select correct input mode (Bluetooth, AUX, USB/TF); Ensure device is properly paired/connected.
Microphone not working	Microphone off; Low battery; Not paired	Turn on microphone; Charge microphone; Re-pair microphone with amplifier.
Bluetooth connection unstable	Distance too far; Interference	Keep devices within 10 meters; Avoid obstacles; Turn off other Bluetooth devices.
Feedback/Howling sound	Microphone too close to speaker; Volume too high	Move microphone away from speaker; Reduce microphone volume or echo; Utilize intelligent feedback suppression.

8. Specifications

Feature	Detail
Brand	RIENOK
Model Number	Rienok S17
Output Wattage	100 Watts

Feature	Detail
Connectivity Technology	Bluetooth 5.3, USB, TF Card, AUX, 6.35mm Instrument Jack
Item Dimensions (L x W x H)	8.3 x 5.1 x 10.2 inches
Enclosure Material	Metal
Power Source	Battery Powered
Number of Channels	2
Audio Input	Microphone
Mounting Type	Floor Standing, Tabletop
Color	Black
Speaker Battery Life	Up to 30 hours (at 50% volume)
Microphone Battery Life	Up to 16 hours (after 3 hours charging)



Image: Diagram illustrating the 100W powerful audio components of the RIENOK S17, including a 6.5-inch mid-bass speaker and a 2-inch tweeter.



Image: The RIENOK S17 amplifier highlighting its battery life, indicating up to 30 hours of playtime.

9. Warranty and Support

The RIENOK S17 comes with a**2-year warranty** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or natural disasters.

For technical support, warranty claims, or any product-related inquiries, please contact RIENOK customer service through the retailer where the product was purchased or visit the official RIENOK website for contact information.

Your browser does not support the video tag.

Video: An official product video from RIENOK demonstrating the features and usage of the PA Portable Voice Amplifier with two wireless microphones.

© 2026 RIENOK. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

Does the RIENOK S17 100W Portable Voice Amplifier support True Wireless Stereo (TWS)?

Based on the available documentation for the RIENOK S17, there is no mention of True Wireless Stereo (TWS) support. While other RIENOK products (like the S1 mini) explicitly list TWS functionality in their manuals,...

Read full answer