

[Manuals.plus](#) /

> [Jugbow](#) /

> Jugbow Dog Training Collar BTC801 User Manual


Jugbow BTC801

Jugbow Dog Training Collar BTC801 User Manual

Model: BTC801

INTRODUCTION

This manual provides comprehensive instructions for the safe and effective use of your Jugbow Dog Training Collar. Designed for dogs weighing 10-120 lbs, this system offers four training modes and an extended remote range to assist in behavior correction and command reinforcement. Please read this manual thoroughly before operating the device.

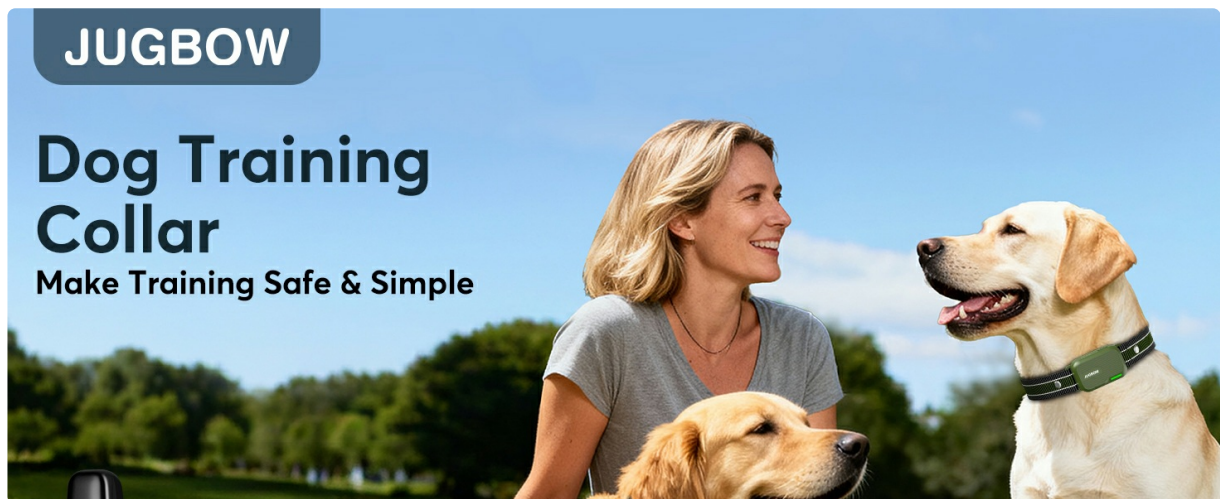

The Jugbow Dog Training Collar system, designed for safe and simple training.

PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x Collar Receiver (assembled with 2 short metal prongs & 2 short silicone covers)
- 1 x Remote Transmitter
- 2 x Long Metal Prongs
- 2 x Long Silicone Covers

- 1 x User Manual
- 1 x Charging Cable
- 1 x Remote Strap
- 1 x Test Tool

4 Effective Training Modes

End bad behaviors in seconds



The complete Jugbow Dog Training Collar package, including the remote, collar, and various accessories.

PRODUCT FEATURES

- **4 Effective Training Modes:** The system includes Beep (1-8 levels), Vibration (1-16 levels), Shock (1-99 levels), and an Emergency Shock Mode for critical behavior correction.
- **Extended 4200FT Remote Range:** Provides reliable control over long distances, suitable for open outdoor

environments.

- **IPX8 Waterproof Collar:** The receiver is fully waterproof, allowing use in various weather conditions and during water activities.
- **Adjustable & Comfortable Collar:** Fits dog neck sizes from 7.8" to 24.4" and weights from 10-120 lbs, ensuring a secure and gentle fit.
- **Long-Lasting Battery & Safe-Lock:** The collar offers up to 35 days of standby time, and the remote up to 45 days. A 2-hour fast charge is supported. The remote features a one-touch Safe-Lock to prevent accidental activation.
- **Detachable Metal Prongs:** Allows for customization based on your dog's coat length and training needs.



Key features of the Jugbow Dog Training Collar system.

SETUP

1. Charging the Devices

Before first use, fully charge both the collar receiver and the remote transmitter. Use the provided charging cable. The collar has a charging port on its side, and the remote uses a USB-C port. A full charge typically takes 2 hours.

Safe Guarantee Design



Security Lock



Protective Rubber Covers



The collar and remote offer extended battery life and quick charging.

2. Attaching Prongs and Silicone Covers

The collar comes with short metal prongs and silicone covers pre-assembled. For dogs with thicker coats, replace the short prongs with the longer metal prongs provided. Always use the silicone covers to prevent skin irritation.

No Shock Mode



Detachable Metal Prongs

Remove prongs when shock is not needed



With Shock



No Shock

Ensure the protective rubber covers are used over the prongs for your dog's comfort and safety.

3. Adjusting the Collar Fit

Adjust the collar strap to ensure a snug but comfortable fit. You should be able to fit two fingers between the collar and your dog's neck. The contact points must touch the dog's skin for the vibration and shock functions to be effective. The collar is adjustable for neck sizes from 7.8" to 24.4".

IPX8 Waterproof Collar



Raining



Swimming



Bathing



The collar is adjustable to fit a wide range of dog sizes, from 10 to 120 lbs.

4. Powering On/Off

- **Collar:** Press and hold the power button on the collar receiver until the indicator light illuminates.
- **Remote:** Slide the lock switch on the side of the remote to the unlock position. The screen will light up.

To power off, reverse these steps. The remote's safety lock feature prevents accidental button presses.



The remote features a safety lock to prevent unintended commands.

OPERATING INSTRUCTIONS

1. Selecting Training Modes

The remote offers four training modes: Beep, Vibration, Shock, and Emergency Shock. Use the mode selection button on the remote to cycle through these options. The selected mode and its intensity level will be displayed on the remote's screen.

Up to 4200ft Remote Range

4200FT



The four training modes allow for customized behavior correction.

2. Adjusting Intensity Levels

For Beep, Vibration, and Shock modes, you can adjust the intensity level using the rotary dial on the top of the remote. Beep has 1-8 levels, Vibration has 1-16 levels, and Shock has 1-99 levels. Start with the lowest effective level and gradually increase if necessary.

Adjustable Collar

Fit for 10-120lbs almost breeds



30% Smaller & Lighter Collar



The remote allows for easy adjustment of intensity levels for each mode.

3. Training Guidance

Always begin training with the Beep or Vibration modes. These modes are often sufficient to gain your dog's attention and correct unwanted behaviors. Reserve the Shock mode for situations where milder corrections are ineffective or for emergency situations. Consistency is key in dog training.

- **Beep Mode:** Ideal for recall or gaining attention.
- **Vibration Mode:** Effective for behavior correction, such as stopping excessive barking or unwanted sniffing.
- **Shock Mode:** Use cautiously and at the lowest effective level for persistent unwanted behaviors or to interrupt imminent danger.



Vibration mode can be used to correct unwanted behaviors like sniffing inappropriate items.



Shock mode can be used as a last resort for interrupting aggressive behavior or imminent danger.

MAINTENANCE

- **Cleaning:** The collar can be spot cleaned as needed. Ensure the charging port is sealed before cleaning.
- **Wearing Duration:** For your dog's well-being, the collar should not be worn continuously for more than 12 hours per day. Remove the collar periodically to allow the skin to breathe and prevent pressure sores.
- **Contact Points:** Regularly check the contact points for cleanliness and ensure they are free from debris.

3-Step Safety Guide for a Happy Pup

Prep
Ensure Gentle Contact
Silicone caps prevent skin friction

Step 1

Wear
Check The Perfect Fit
A snug 2-finger fit under the collar

Step 2

Rest
Give The Skin a Break
Max 12 hours of wear per day

Step 3

Follow these three steps for safe and comfortable collar usage: ensure gentle contact, check for a perfect fit, and give the skin a break.


TROUBLESHOOTING

Problem	Possible Cause	Solution
Collar not responding to remote	Low battery on collar or remote; devices not paired; out of range.	Charge both devices fully. Ensure both are powered on. Re-pair if necessary (refer to pairing instructions in the full manual). Move closer to the dog.
No vibration/shock	Contact points not touching skin; intensity level too low; prongs are too short for dog's fur.	Adjust collar fit to ensure good contact. Increase intensity level gradually. Use longer prongs if your dog has thick fur.

Problem	Possible Cause	Solution
Remote screen is blank	Low battery; remote is locked.	Charge the remote. Slide the safety lock switch to the unlock position.

SPECIFICATIONS

- **Model Number:** BTC801
- **Brand:** Jugbow
- **Color:** Green
- **Material:** Nylon
- **Closure Type:** Buckle
- **Remote Range:** Up to 4200 feet
- **Waterproof Rating:** IPX8 (Collar)
- **Training Modes:** Beep (1-8 levels), Vibration (1-16 levels), Shock (1-99 levels), Emergency Shock
- **Recommended Dog Size:** 10-120 lbs
- **Neck Size Compatibility:** 7.8" - 24.4"
- **Collar Standby Time:** Up to 35 days
- **Remote Standby Time:** Up to 45 days
- **Charging Time:** Approximately 2 hours
- **Product Care:** Spot Clean
- **Manufacturer:** Jugbow

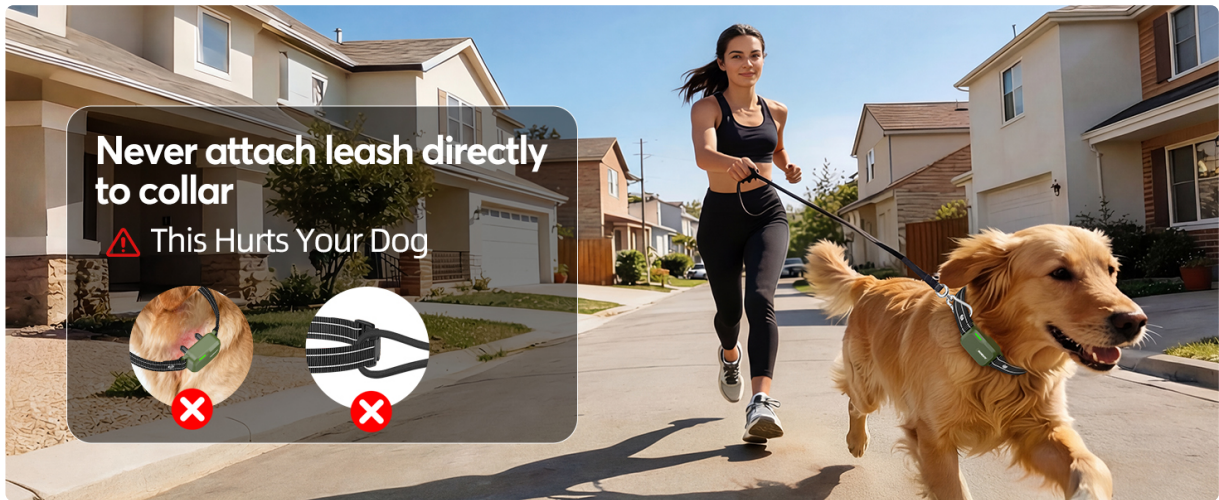

The Jugbow collar is suitable for small, medium, and large dogs.

WARRANTY AND SUPPORT

The Jugbow Dog Training Collar BTC801 comes with a **2-Year No-Cost Replacement Promise**. For any questions, troubleshooting assistance, or warranty claims, please contact Jugbow customer support through the retailer's platform or the official Jugbow website.

Charge Faster Last Longer



**2H Fast
Charging**



**Remaining
Battery Display**

45 Days
Standby Time

35 Days
Standby Time

Your Jugbow product is backed by a 2-year no-cost replacement promise.