

Manuals.plus /

- › TECKNET /
- › TECKNET Wireless Keyboard TK-KB020 User Manual

## TECKNET TK-KB020

# TECKNET Wireless Keyboard TK-KB020 User Manual

Model: TK-KB020

## 1. PRODUCT OVERVIEW

The TECKNET TK-KB020 is a versatile wireless keyboard designed for multi-device connectivity, offering both Bluetooth and 2.4GHz USB options. It supports up to four device connections, allowing seamless switching between computers, tablets, and smartphones. Featuring a compact layout, quiet scissor-switch keys, and an ergonomic tilt, this keyboard is built for comfortable and efficient typing across various operating systems.



Image 1.1: Overview of the TECKNET Wireless Keyboard's key features.



Image 1.2: The compact and minimalist design of the keyboard, highlighting its dimensions.

## 2. PACKAGE CONTENTS

---

Please check the package for the following items:

- TECKNET Wireless Keyboard (TK-KB020)
- USB-C Charging Cable
- User Manual

## 3. KEYBOARD LAYOUT

---

The keyboard features a standard layout with dedicated function keys, a numeric keypad, and a Bluetooth control area for managing multiple device connections.

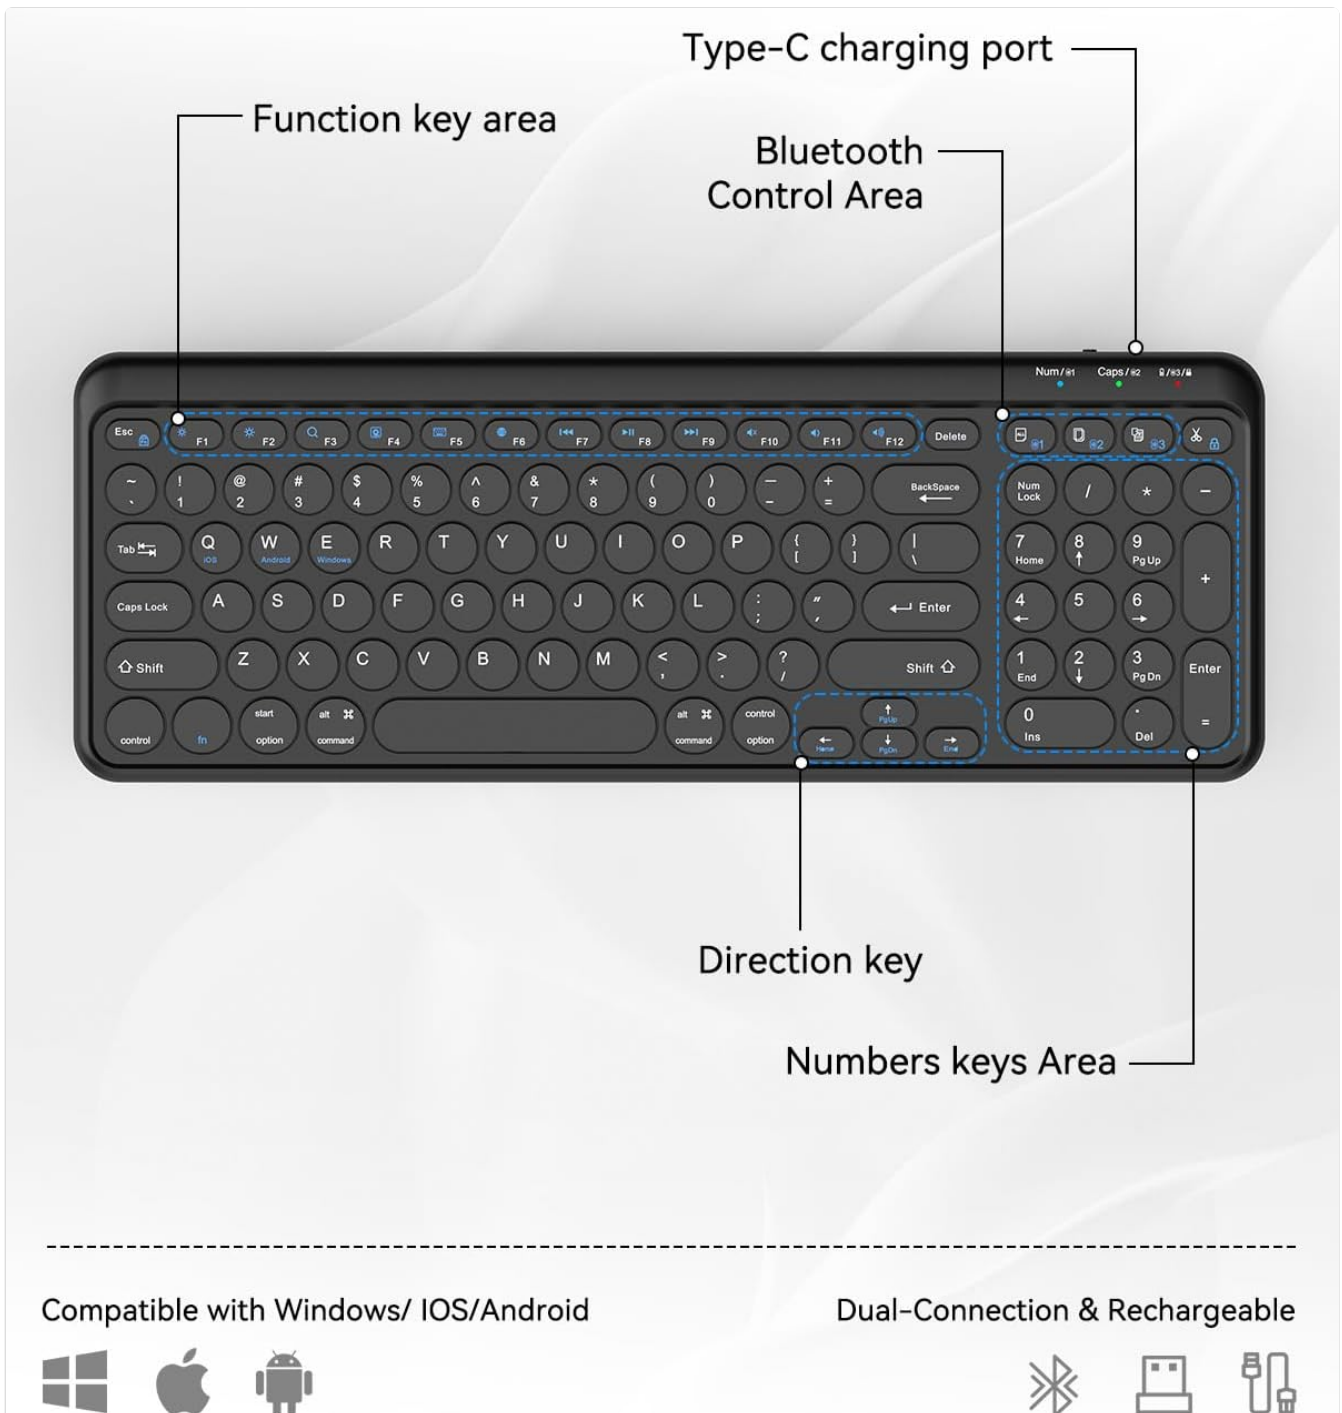


Image 3.1: Detailed layout of the keyboard, indicating key functional areas.

## 4. SETUP

### 4.1 Charging the Keyboard

Before initial use, fully charge the keyboard using the provided USB-C cable. The keyboard is equipped with a 500mAh rechargeable battery, offering up to 90 days of use on a single charge. A full charge typically takes 1 hour.

1. Connect the USB-C cable to the charging port on the keyboard.
2. Connect the other end of the cable to a USB power source (e.g., computer USB port, USB wall adapter).
3. The charging indicator light will illuminate during charging and turn off when fully charged.

## 500mAh Rechargeable Battery

Up to **90** Days of Use  
on a Single Charge

Auto-sleep after 10 mins of inactivity



Image 4.1: Charging the keyboard via its USB-C port.

### 4.2 2.4GHz USB Connection

For devices without Bluetooth or for a direct wireless connection, use the 2.4GHz USB receiver.

1. Locate the USB receiver, which is stored inside the battery cover of the keyboard.
2. Plug the USB receiver into an available USB-A port on your computer or device.
3. The keyboard will automatically connect to the device.

### 4.3 Bluetooth Connection

The keyboard supports up to three Bluetooth connections (BT1, BT2, BT3).

1. Turn on the keyboard.
2. Press and hold the **Fn** key and one of the Bluetooth keys (**BT1**, **BT2**, or **BT3**) for 5 seconds until the corresponding indicator light flashes rapidly. This indicates the keyboard is in pairing mode.
3. On your device (computer, tablet, smartphone), enable Bluetooth and search for new devices.
4. Select "TK-KB020" from the list of available devices.
5. Follow any on-screen prompts to complete the pairing process. The indicator light on the keyboard will stop flashing and remain solid for a few seconds, then turn off, indicating a successful connection.
6. Repeat these steps for up to two additional Bluetooth devices using the other Bluetooth channels.

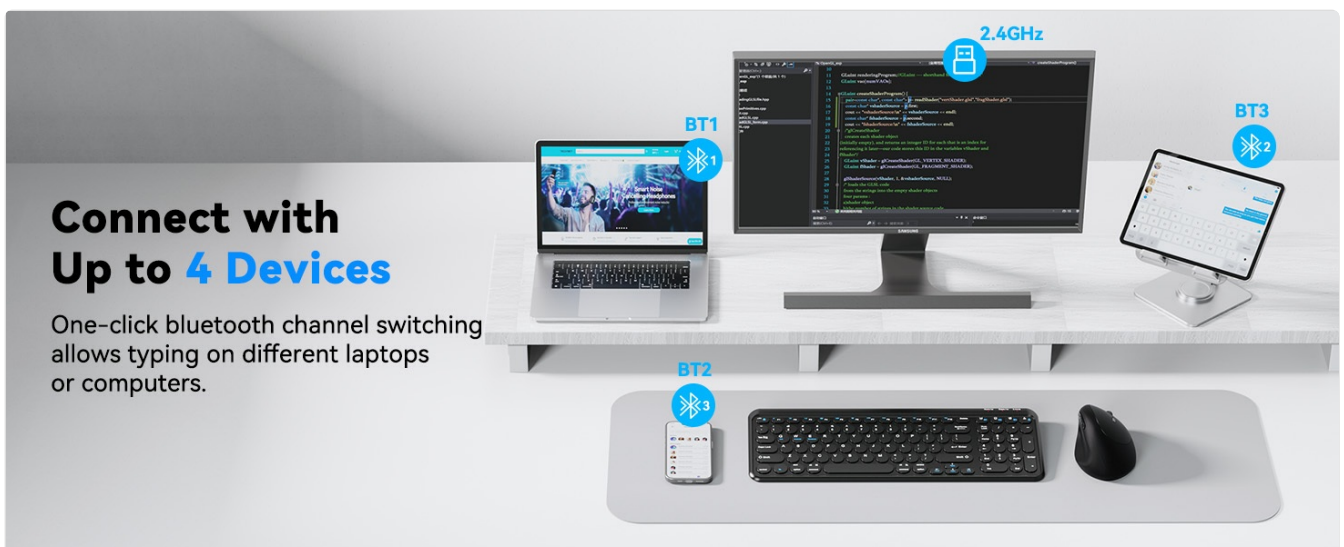


Image 4.2: The keyboard's ability to connect with up to four devices simultaneously.

## 5. OPERATING INSTRUCTIONS

### 5.1 Switching Between Devices

To switch between paired devices, simply press the **Fn** key along with the corresponding Bluetooth channel key (**BT1**, **BT2**, or **BT3**) or the 2.4GHz USB key.

### 5.2 Function Keys and Shortcuts

The keyboard includes a range of function keys (F1-F12) and multimedia shortcuts. These can be accessed directly or by holding the **Fn** key in combination with the desired function key. The **Fn Lock** key can be used to toggle the primary function of the F-keys.

### 5.3 Ergonomic Design

The keyboard features a 7° ergonomic tilt angle designed to reduce wrist strain during extended typing sessions.



Image 5.1: The keyboard's ergonomic design with a 7° tilt for comfortable typing.

### 5.4 Quiet Typing Experience

The precision scissor-switch key mechanism reduces keystroke noise by up to 90%, providing a quiet yet responsive typing experience.



Image 5.2: Illustration of the scissor switch design for a quiet typing experience.

### 5.5 Compatibility

The keyboard is compatible with a wide range of operating systems:

- Windows
- macOS
- iOS
- Android

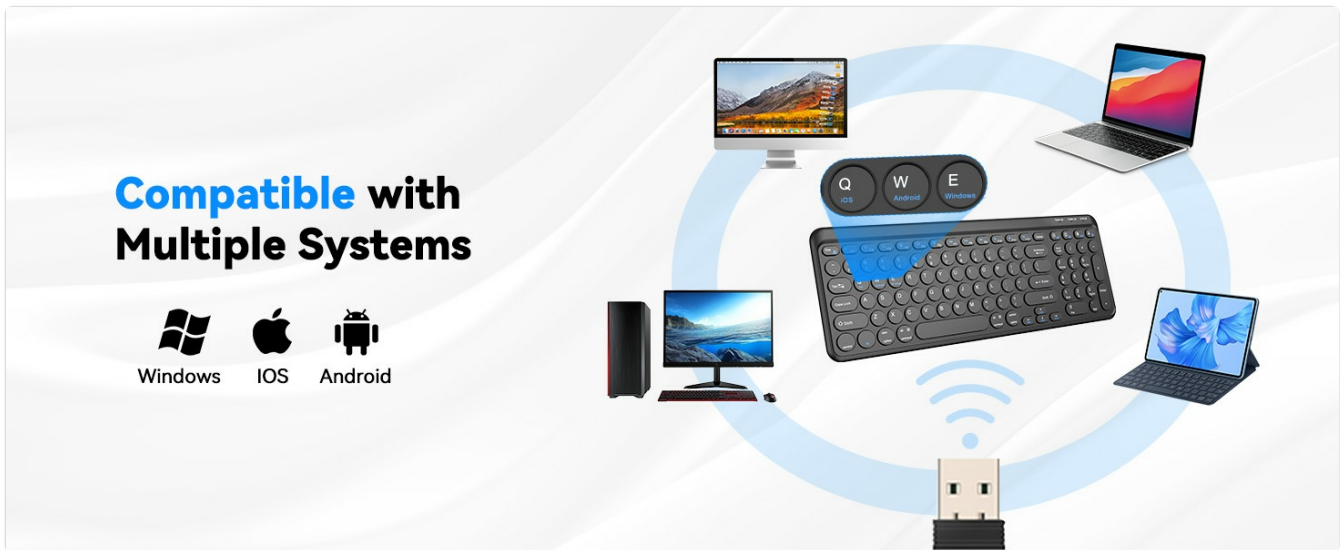


Image 5.3: The keyboard's broad compatibility with multiple operating systems.

## 6. MAINTENANCE

### 6.1 Battery Management

To conserve battery life, the keyboard automatically enters sleep mode after 10 minutes of inactivity. Press any key to wake it up. When the battery is low, the indicator light will flash red to remind you to recharge.

### 6.2 Cleaning

To clean the keyboard, gently wipe the surface with a soft, damp cloth. Avoid using harsh chemicals or abrasive materials. Ensure the keyboard is powered off before cleaning.



Image 6.1: Rounded keycaps and LED status indicators for real-time keyboard status.

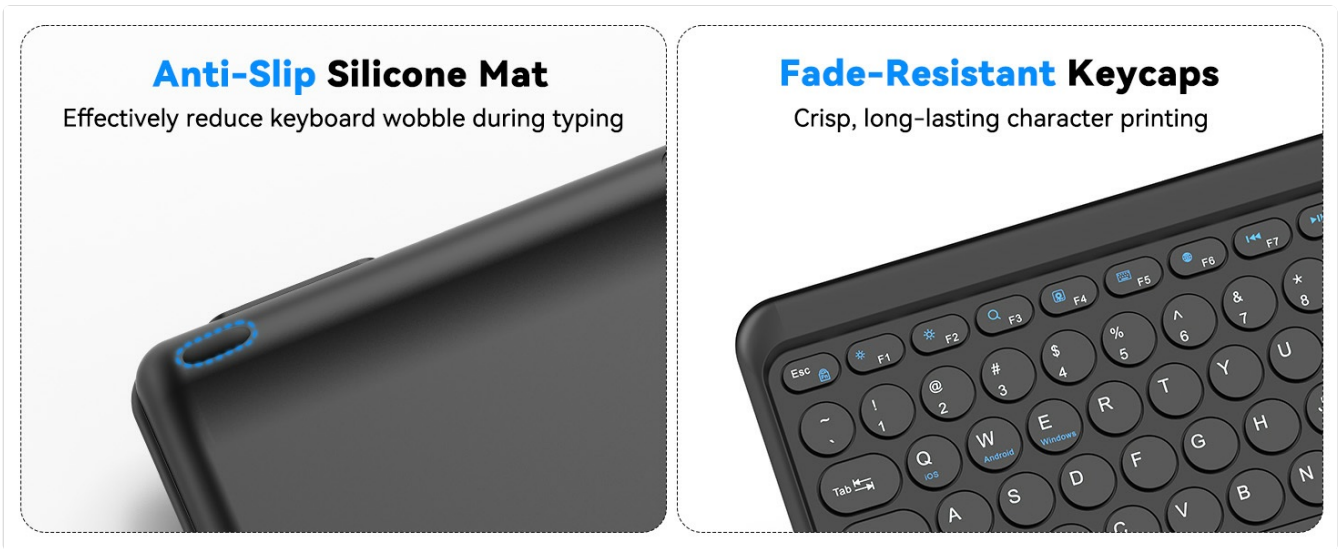


Image 6.2: Anti-slip silicone mat for stability and fade-resistant keycaps for durability.

## 7. TROUBLESHOOTING

---

### 7.1 Connection Issues

- **Keyboard not connecting via Bluetooth:** Ensure the keyboard is charged. Verify that Bluetooth is enabled on your device. Put the keyboard into pairing mode again (Fn + BT key for 5 seconds) and re-attempt pairing.
- **2.4GHz USB connection not working:** Ensure the USB receiver is securely plugged into a working USB port. Try a different USB port.
- **Keyboard not responding:** Check the battery level. Recharge the keyboard if the battery is low. Try turning the keyboard off and on again.

### 7.2 Typing Delays or Missed Keystrokes

- Ensure the keyboard is within the effective range of your device (typically up to 10 meters for Bluetooth).
- Minimize interference from other wireless devices.
- Check the battery level and recharge if necessary.

## 8. SPECIFICATIONS

---

Feature	Detail
Brand	TECKNET
Model Name	TK-KB020
Connectivity Technology	Bluetooth, 2.4GHz USB-A
Compatible Devices	Laptop, PC, Smartphone (Windows, macOS, iOS, Android)
Special Feature	Rechargeable, Silent Typing, Multi-Device Connection, Ergonomic Tilt
Battery Capacity	500mAh
Usage Time (Single Charge)	Up to 90 days
Charging Time	Approx. 1 hour
Material	Plastic
Item Weight	14.88 ounces

## 9. WARRANTY AND SUPPORT

---

### 9.1 Warranty Information

The TECKNET TK-KB020 Wireless Keyboard comes with a standard 1-year warranty. Additionally, TECKNET offers an extended 36-month warranty exclusively for registered users. Please refer to the TECKNET official website for registration details and full warranty terms and conditions.

### 9.2 Customer Support

For any questions, technical assistance, or support regarding your TECKNET Wireless Keyboard, please contact our dedicated customer service team. Contact information can typically be found on the TECKNET official website or within your product packaging.